15 XSTO 1


RCA connectors



RCA plug acc. to JEITA RC-5231, straight version, with bend protection and solder terminals

State: Active

15 XSTO 1

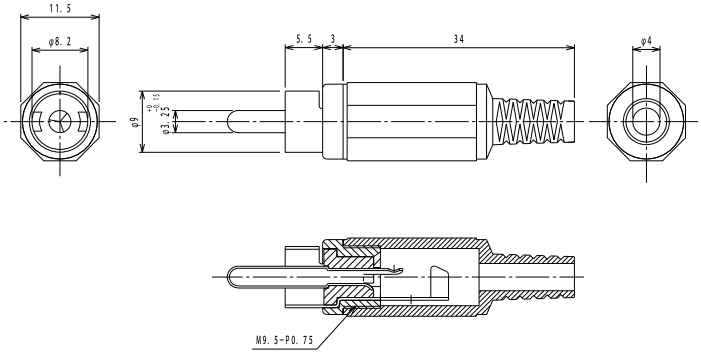

Environmental conditions

Temperature range	-20 °C/+70 °C

Materials

Insulating body	ABS
Inner contact	CuZn, nickel-plated
Outer contact	steel, nickel-plated
Housing	PE

Connectable conductors for solder area

Cable diameter	4 mm

Electrical data (at T_{amb} 20 °C)

Rated current	2 A
Rated voltage	34 V AC/DC
Rated impulse voltage	250 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

- 1552 02 V
- 1553 02
- 4514
- BTO 1
- BTO 1 V
- BTOR 1
- KTO 1
- XKTO 1

15 XSTO 1

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
XSTO 1 GELB (yellow/jaune)	2	100	1000
XSTO 1 ROT (red/rouge)	2	100	1000
XSTO 1 SCHWARZ (black/noir)	2	100	1000
XSTO 1 WEISS (white/blanc)	2	100	1000

Packaging:
in bulk, in a cardboard box or a plastic bag