
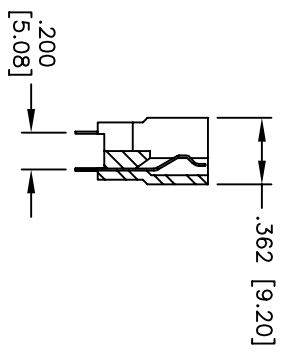
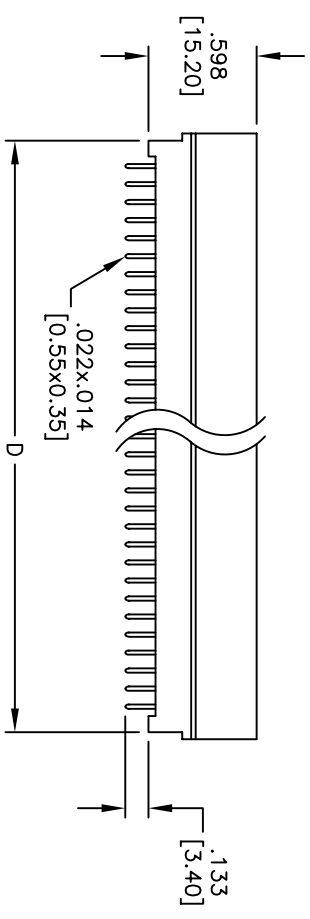
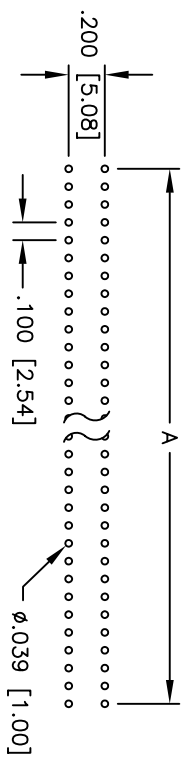


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/06	
A		UPDATED POSITIONS	8/23/06	

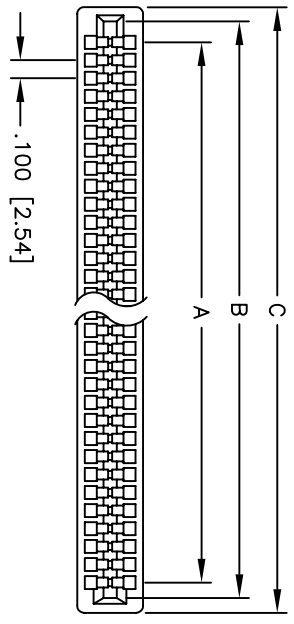

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 28, 30, 32, 24, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 100, 102, 106, 108, 110, 112, 114, 116, 118

A = .100 [2.54] x No. of Spaces  
 B = A + .200 [5.08]  
 C = A + .360 [9.14]  
 D = A + .257 [6.54]

**SPECIFICATIONS:**  
 Material: PBT, Glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Copper Alloy  
 Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on PCB tails  
 Electrical: Operating voltage: 250 VAC max.  
 Current rating: 3 Amps max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 3,000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C  
 Environmental: Lead free, RoHS complaint  
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
ØXX	± .10
ØXXX	± .015
ØXXX	± .010
APPROVALS	DATE
DRAWN	LFJ
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CARD EDGE CONNECTOR  
 VERTICAL, PCB

SIZE: X  
 PART NO.: CE-XX-U  
 SCALE: NTS  
 SHEET 1 OF 1