



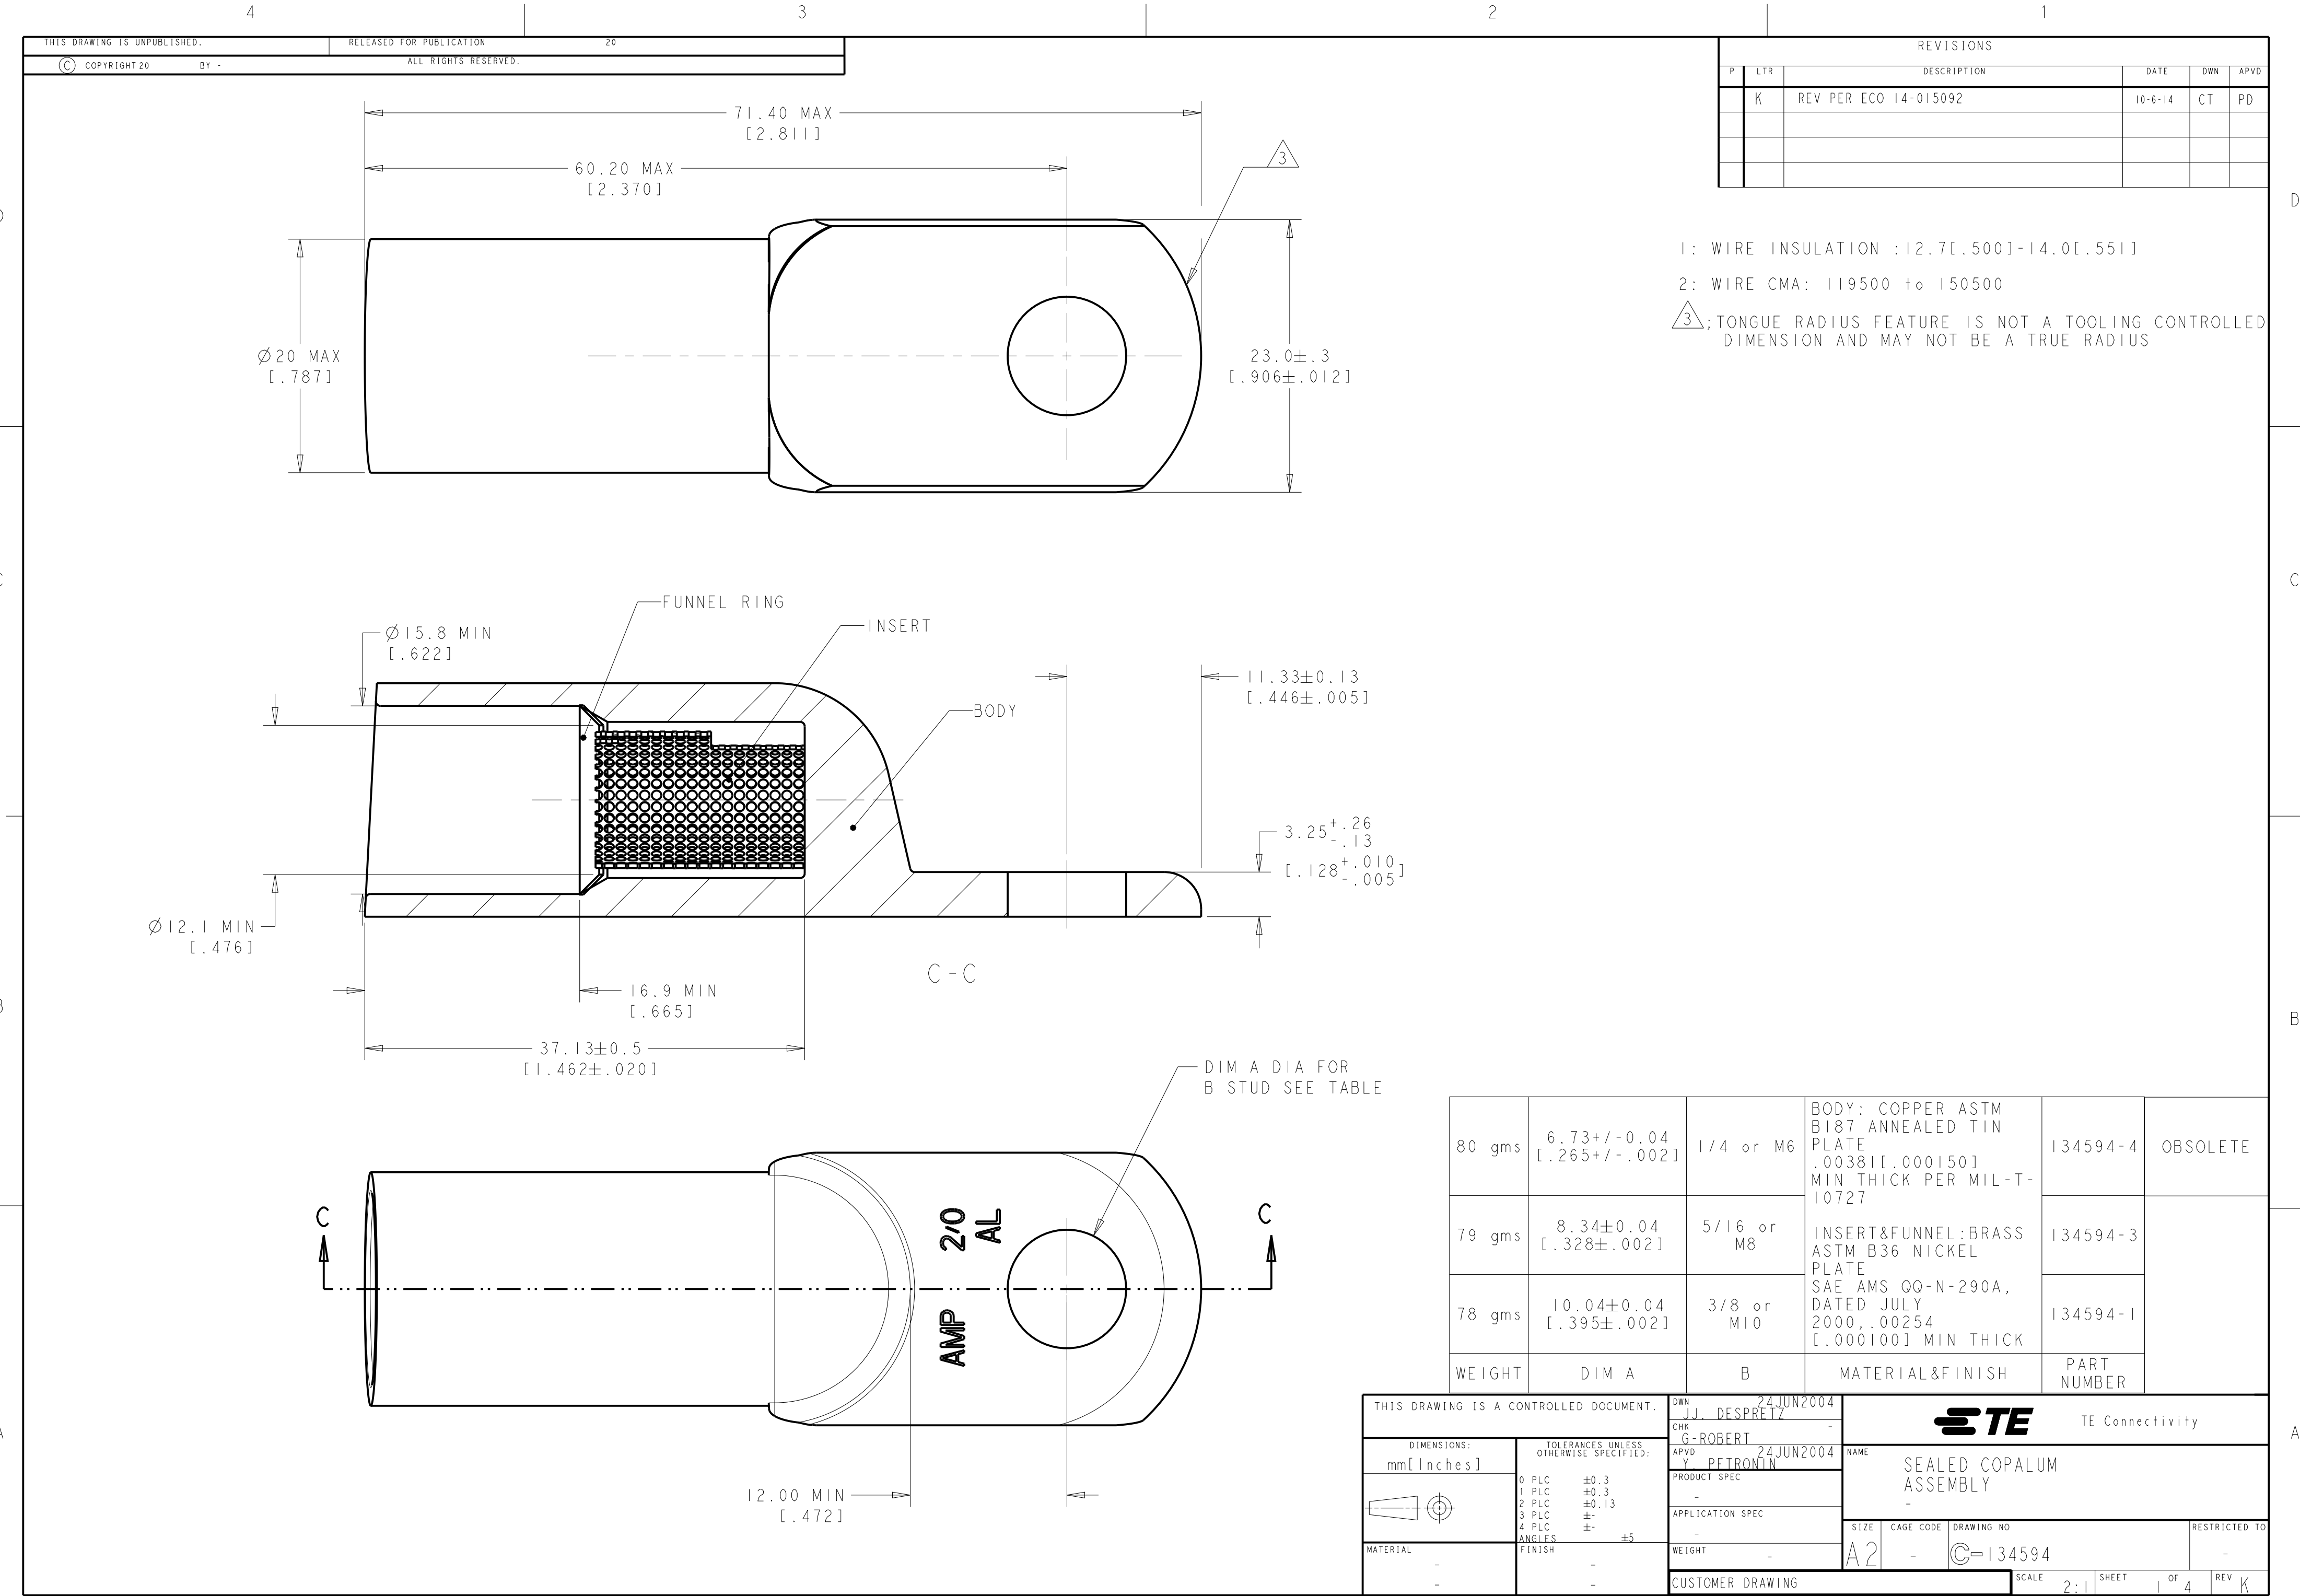

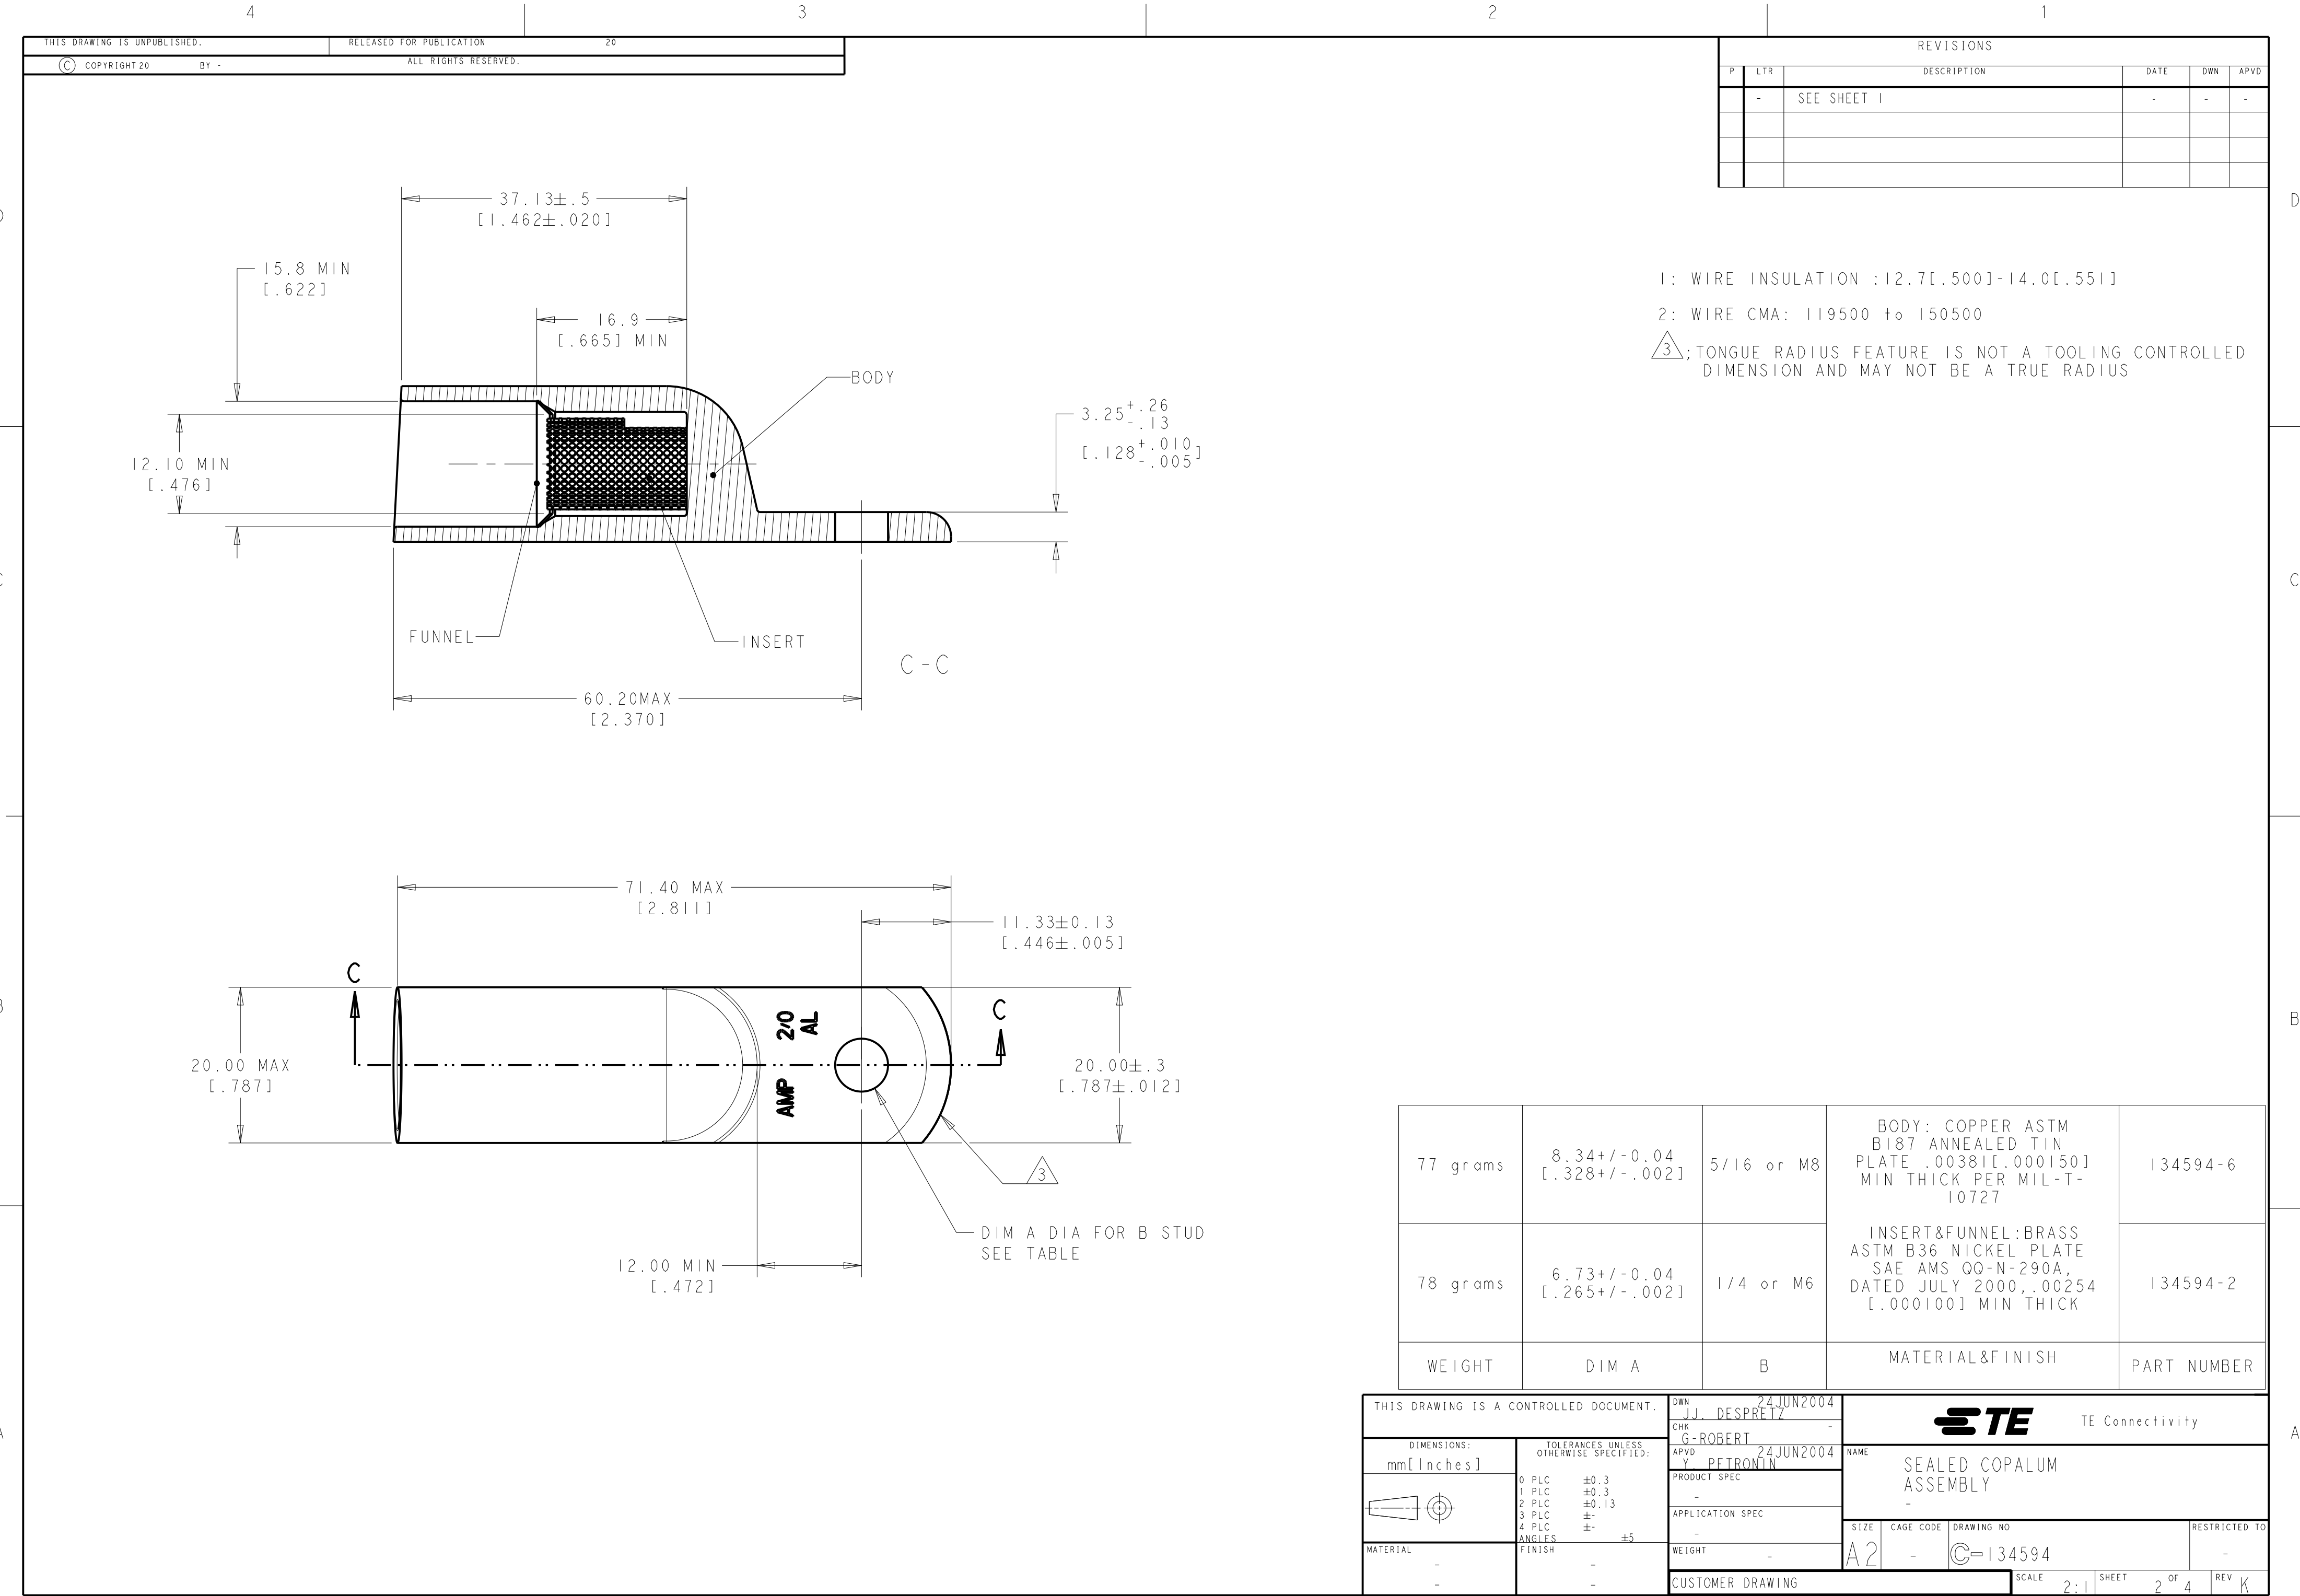


1: WIRE INSULATION :12.7[.500]-14.0[.551]
2: WIRE CMA: 119500 to 150500
3; TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS

77 grams	8.34+/-0.04 [.328+/- .002]	5/16 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .0038[.000150] MIN THICK PER MIL-T-10727	134594-6
78 grams	6.73+/-0.04 [.265+/- .002]	1/4 or M6	INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-2
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JJ. DESPRETZ CHK G-ROBERT APVD Y. PETRONIN		24JUN2004		 TE Connectivity	
DIMENSIONS: mm[Inches]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		SEALED COPALUM ASSEMBLY	
		0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±5		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	
MATERIAL - -		FINISH - -		CAGE CODE -		DRAWING NO C-134594	
CUSTOMER DRAWING				SCALE 2:1		SHEET 2 OF 4	
				REV K		RESTRICTED TO	

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

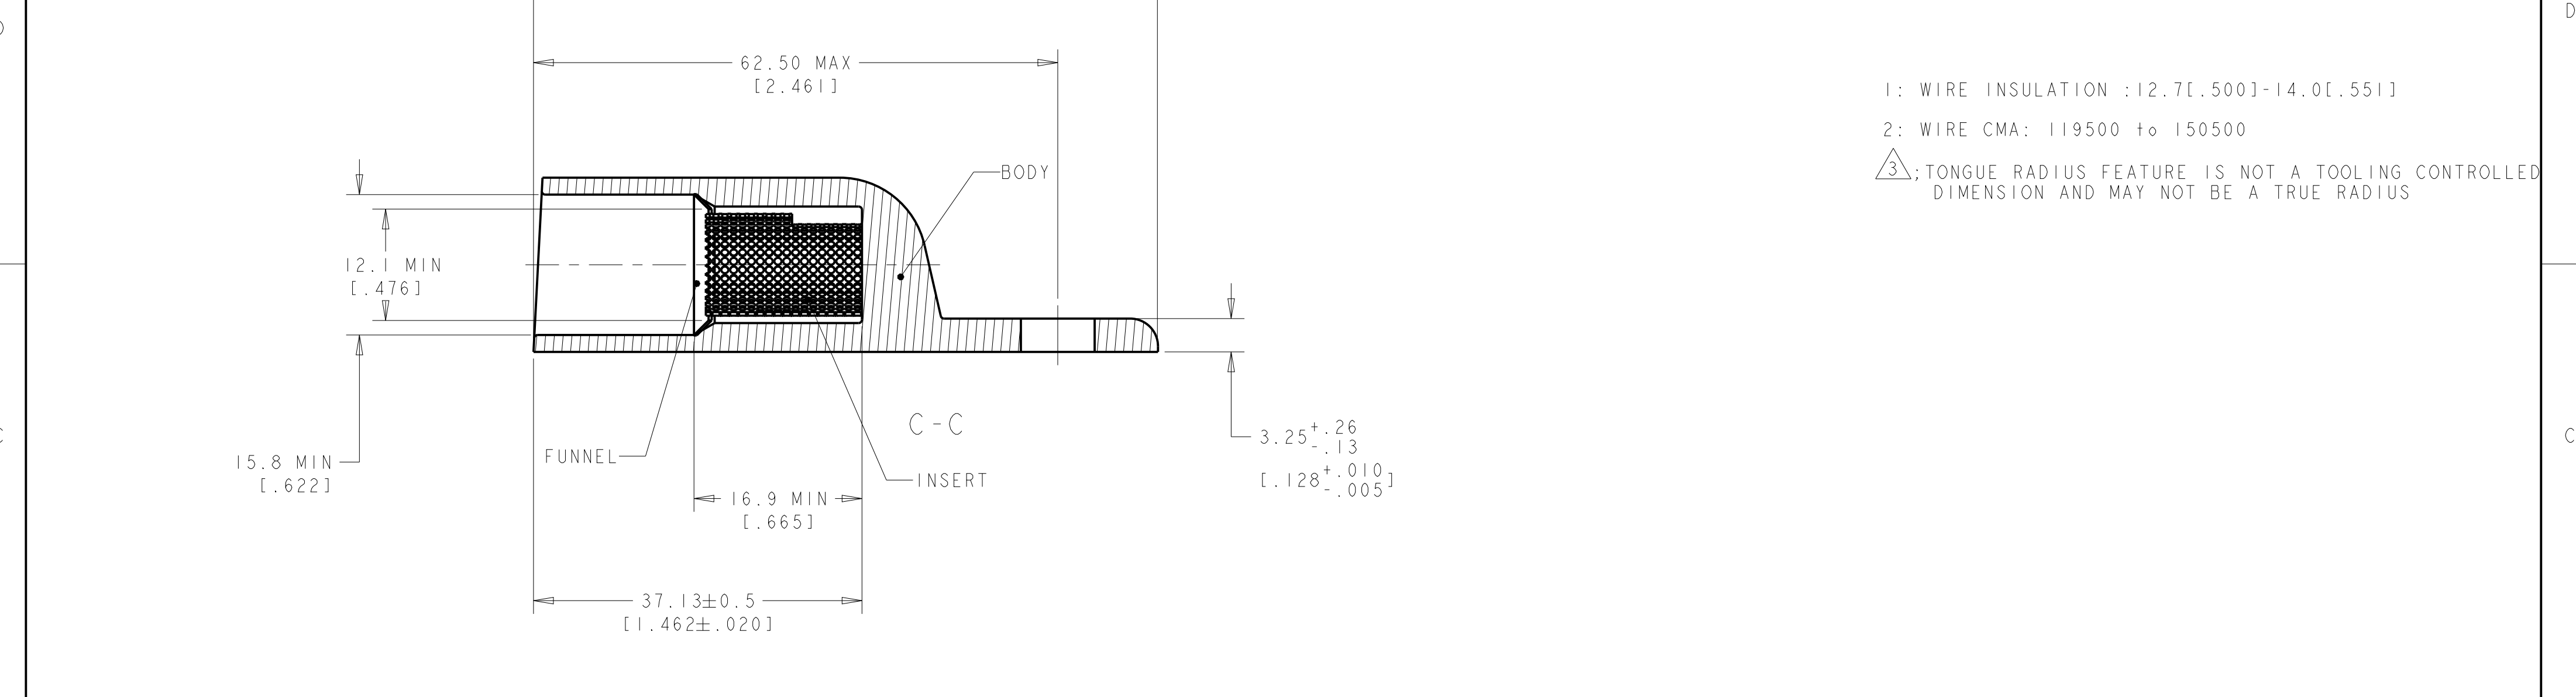

1: WIRE INSULATION : 12.7[.500]-14.0[.551]
2: WIRE CMA: 119500 to 150500

3; TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS

77 grams	8.34±0.04 [.328±.002]	5/6 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .0038[.000150] MIN THICK PER MIL-T-10727 INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-5
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24JUN2004 JJ. DESPRETZ CHK G-ROBERT APVD 24JUN2004 Y. PETRONIN	TE Connectivity	
DIMENSIONS: mm[Inches]		PRODUCT SPEC - APPLICATION SPEC -	NAME SEALED COPALUM ASSEMBLY	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±5 FINISH - -		WEIGHT -	SIZE A2	CAGE CODE -
MATERIAL -		CUSTOMER DRAWING	DRAWING NO 134594	RESTRICTED TO -
		SCALE 2:1	SHEET 3	OF 4
		REV K		

D

C

B

A


D

C


B

A


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

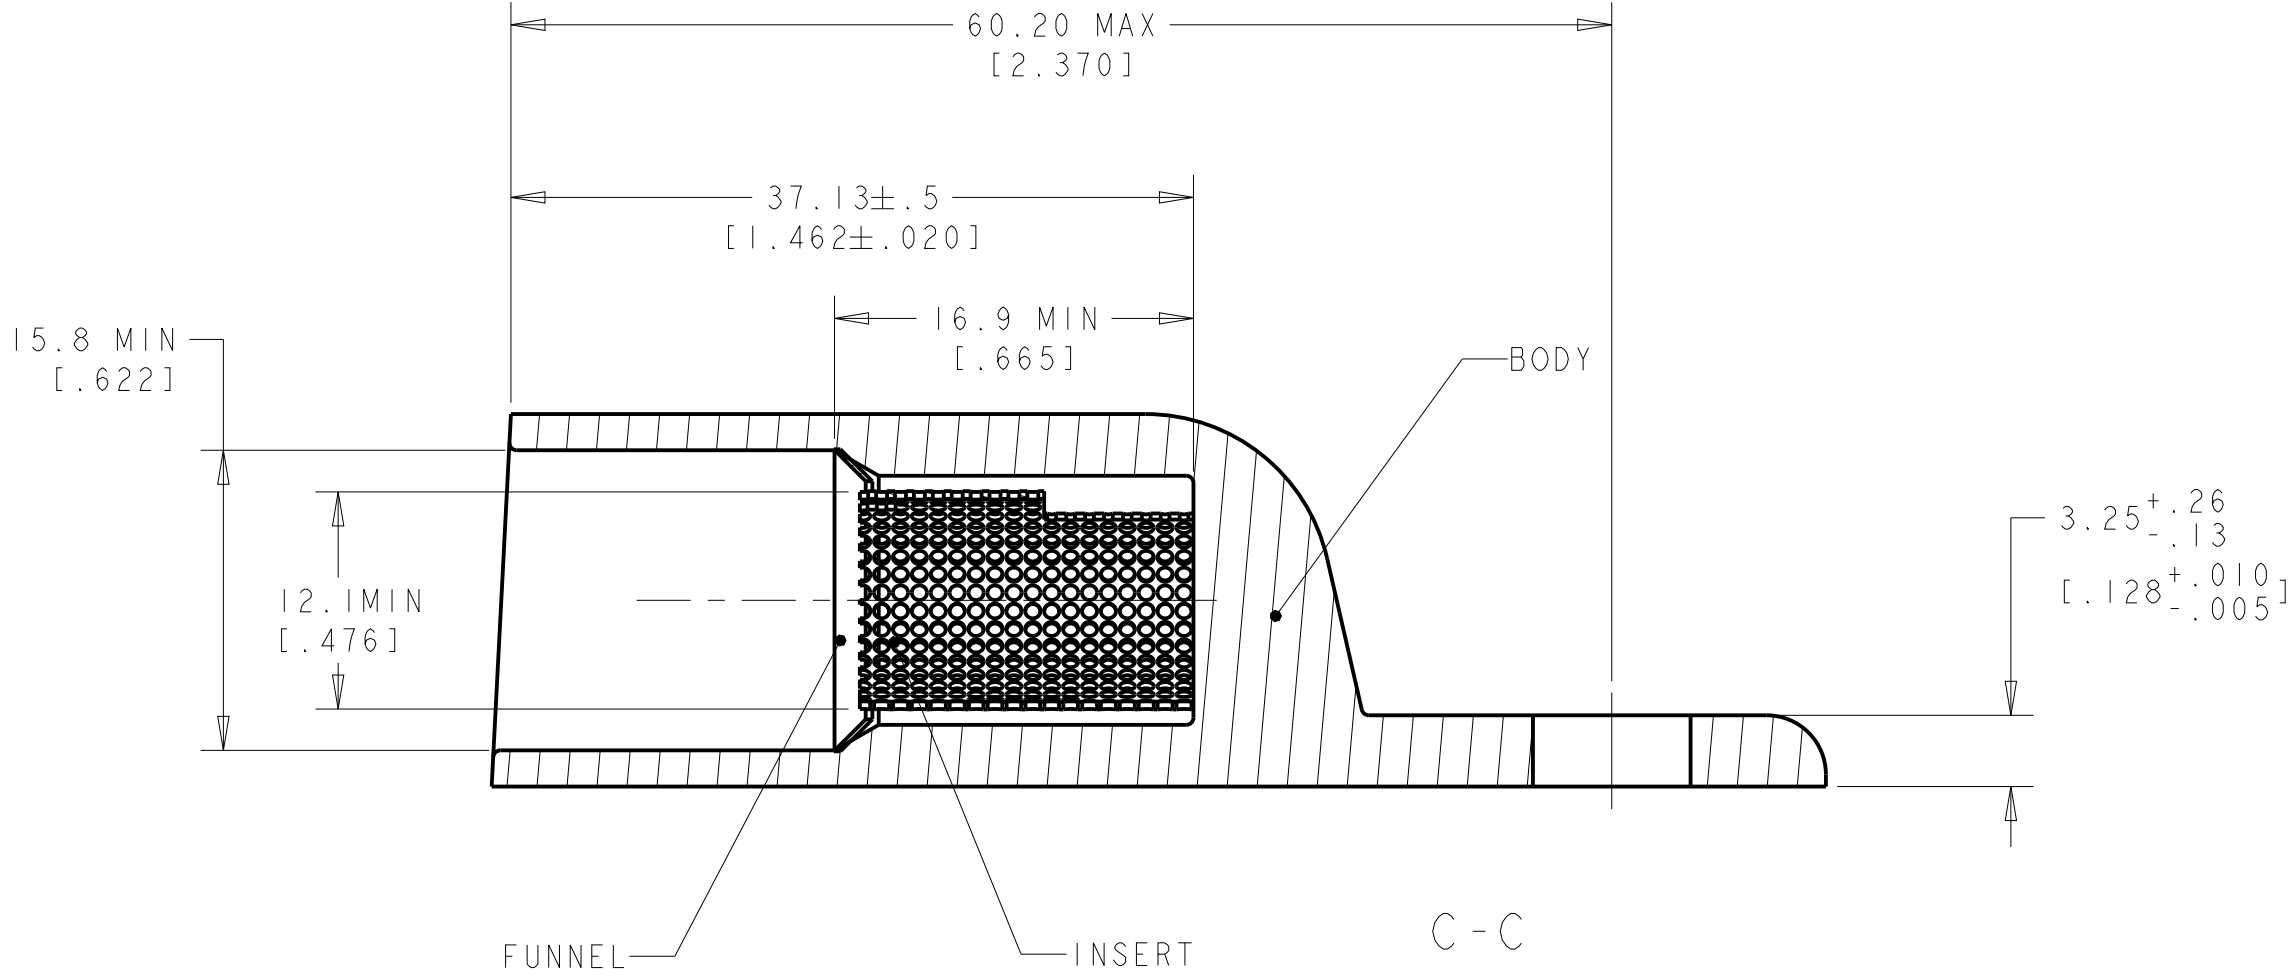

- 1: WIRE INSULATION :12.7[.500]-14.0[.551]
- 2: WIRE CMA: 119500 to 150500
- 3: TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS

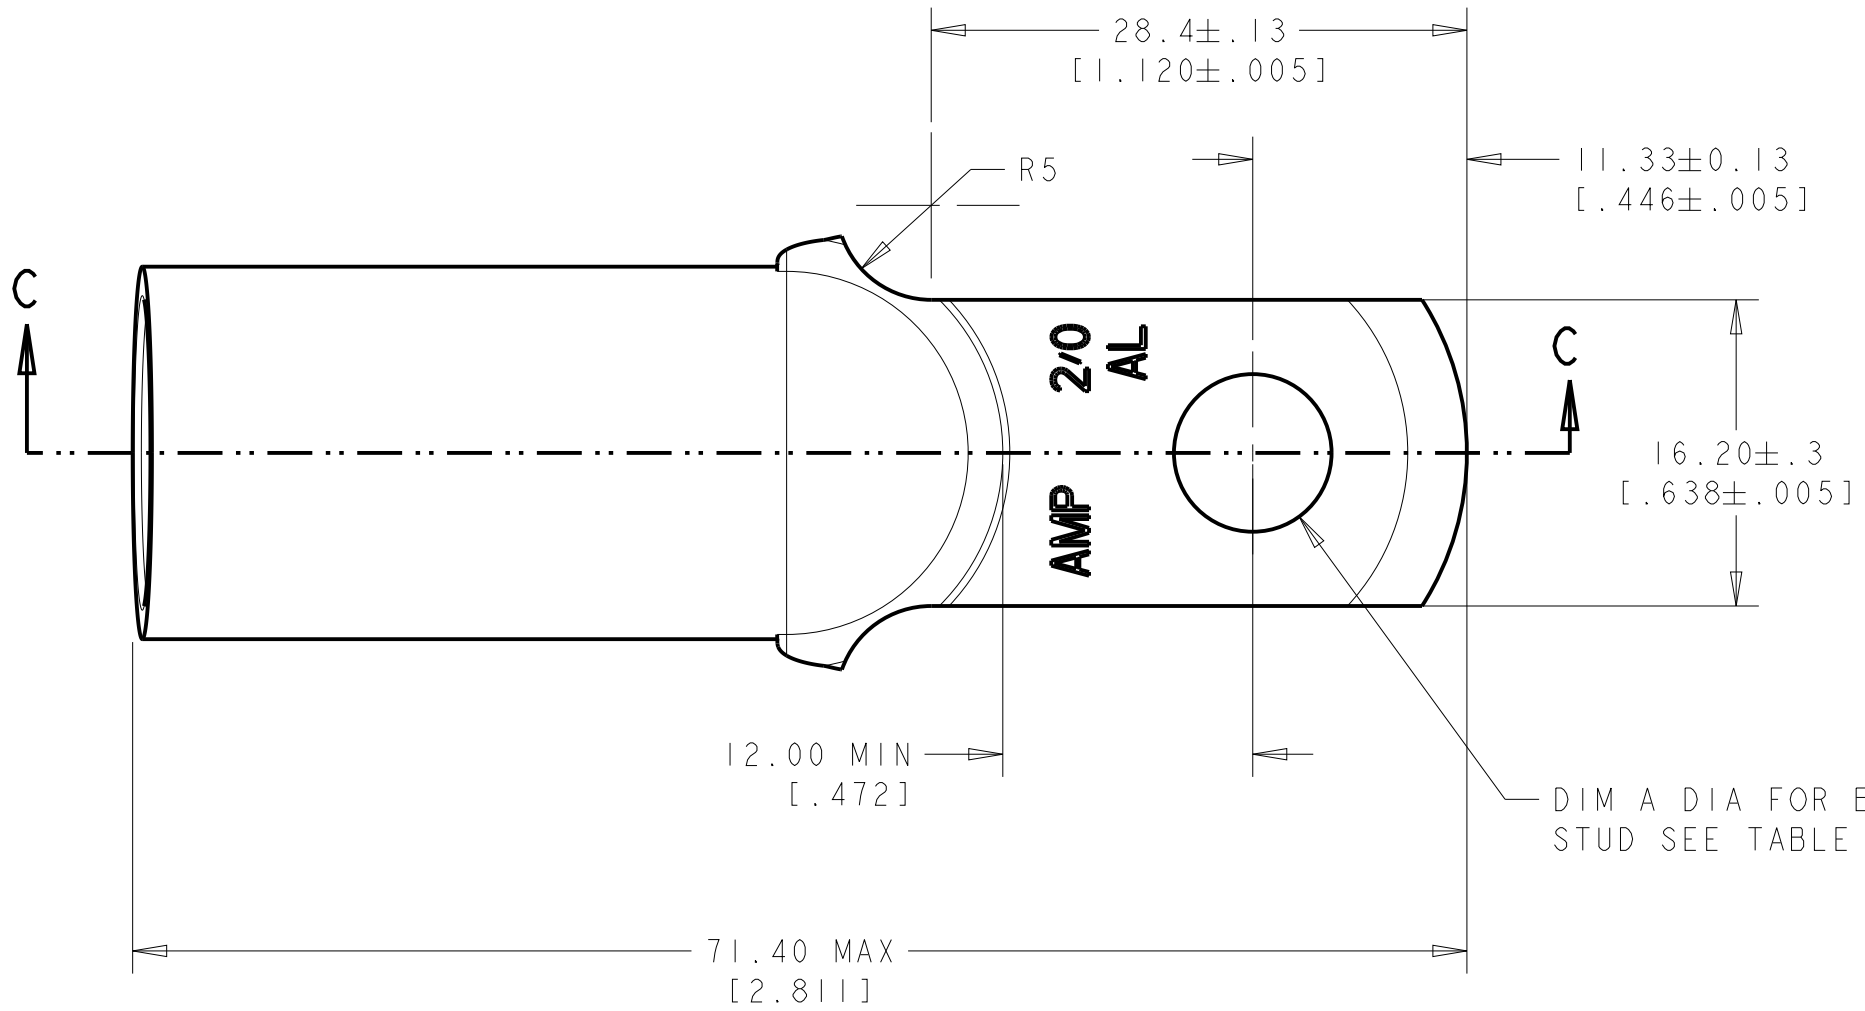

76 grams	8.34±0.04 [.328±.002]	5/6 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .00381[.000150] MIN THICK PER MIL-T-10727 INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-7
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JJ. DESPRETZ CHK G-ROBERT APVD Y. PETRONIN		24JUN2004		 TE Connectivity	
DIMENSIONS: mm[Inches]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SEALED COPALUM ASSEMBLY			
		0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±5 FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		RESTRICTED TO -	
MATERIAL - -		CUSTOMER DRAWING		SIZE A2	CAGE CODE -	DRAWING NO C-134594	
				SCALE 2:1	SHEET 4 OF 4	REV K	