
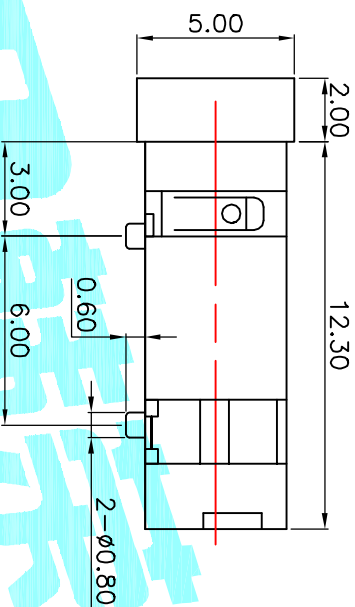


P.C.B Layout (copper-sided view)

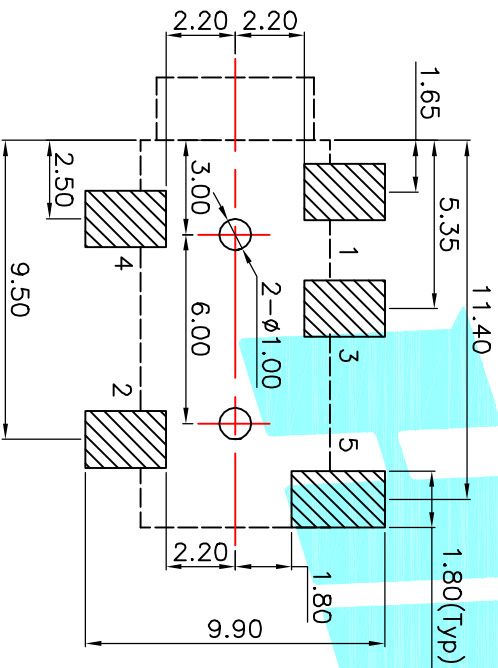

Model NO	PJ-327E-A	PJ-327E-B
Schematic		
Model NO	PJ-327E-C	PJ-327E-D
Schematic		

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.								
	A		NEW											
<table border="1"> <tr> <td>② Terminal</td> <td>5</td> <td>Phosphor bronze</td> <td>Au Plating</td> </tr> <tr> <td>① Housing</td> <td>1</td> <td>Nylon</td> <td>Black</td> </tr> </table>							② Terminal	5	Phosphor bronze	Au Plating	① Housing	1	Nylon	Black
② Terminal	5	Phosphor bronze	Au Plating											
① Housing	1	Nylon	Black											
ITEM PART NAME		TER'NO.	QTY.	MATERIAL	FINISHING	REMARK								
APPROVALS		DATE		TITLE: PHONE JACKES										
DRAWN J.X.Zhang		2013/11/11		ELECTRONICS CO.,LTD										
CHECKED				PART NO. PJ-327E										
APPROVALS				SCALE: 1:1										
TOLERANCES ARE		30 ^{+0.15} / _{-0.10} 10 ^{+0.10} / _{-0.05} 5 ^{+0.10} / _{-0.05}		UNIT: mm		PROJ-								
		ANGLE ±2'		DRAWING NO.		SHEET 1 OF 1								