

1. PART NO. EXPRESSION :

P I C 1 0 0 5 H 1 0 0 M F - □ □
(a) (b) (c) (d) (e)(f) (g)

(a) Series code

(b) Dimension code

(c) Type code


(d) Inductance code : 100 = 10.0uH

(e) Tolerance code : M = $\pm 20\%$, Y = $\pm 30\%$

(f) F : RoHS Compliant

(g) 11~99 : Internal controlled number


2. CONFIGURATION & DIMENSIONS :

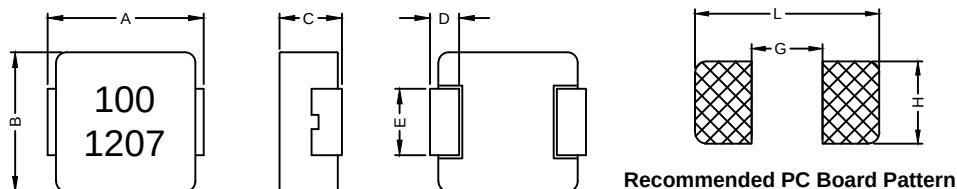


Unit:m/m

A	B	C	D	E	G	H	L
11.0 $\pm$ 0.5	10.0 $\pm$ 0.3	4.8 $\pm$ 0.2	2.3 $\pm$ 0.3	3.0 $\pm$ 0.3	2.2	2.8	6.2

3. SCHEMATIC :



4. MATERIALS :



(a) Core

(b) Wire

(c) Terminal

(d) Ink

(e) Paint

5. GENERAL SPECIFICATION :

a) Test Freq. : L : 100KHz/1.0V

b) Operating Temp. : -40°C to +125°C

c) Storage Temp. : -40°C to +125°C

d) Humidity Range : 85 $\pm$ 3% RH

e) Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt of 40°C (keep 1min)

f) Saturation Current (Isat) will cause L0 to drop 20%.

g) Part Temperature (Ambient+Temp. Rise) : Should not exceed 125°C under worst case operating conditions.

h) Storage condition (component in its packaging)

i) Temperature: -10 to 40°C

ii) Humidity : 50~60% RH



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.



SUPERWORLD ELECTRONICS (S) PTE LTD

06.11.2015

PG. 1

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance L _o (μ H) @ 0 A	I _{rms} (A) Typ.	I _{sat} (A) Typ.	DCR (m Ω) Typ. @ 25°C	DCR (m Ω) Max. @ 25°C
PIC1005HR30MF	0.30	38	65	0.57	0.61
PIC1005HR36MF	0.36	30	60	0.8	0.88
PIC1005HR47MF	0.47	28	50	1.15	1.38
PIC1005HR56MF	0.56	26.5	43	1.3	1.5
PIC1005HR68MF	0.68	25	35	1.7	1.9
PIC1005HR90MF	0.90	25	32	2.2	3.0
PIC1005H1R0MF	1.00	22	30	2.8	3.5
PIC1005H1R2MF	1.20	20	28	2.9	3.5
PIC1005H1R3MF	1.30	20	28	3.2	3.7
PIC1005H1R5MF	1.50	19	27	3.5	4.1
PIC1005H1R8MF	1.80	17.5	25.5	3.7	4.7
PIC1005H2R2MF	2.20	16	24	5.4	6.0
PIC1005H3R3MF	3.30	14	22	9.0	10.4
PIC1005H5R6MF	5.60	10	16	14	16.8
PIC1005H8R2MF	8.20	9	14.5	18.5	24
PIC1005H100MF	10.0	8	13.5	25	29
PIC1005H120MF	12.0	6	10	30	35
PIC1005H330MF	33.0	4.3	7.5	80	92
PIC1005H470MF	47.0	3.8	6.5	125	145
PIC1005H680MF	68.0	2.5	4.0	176	205

Tolerance code : M = $\pm 20\%$, Y = $\pm 30\%$ 

RoHS Compliant







NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :

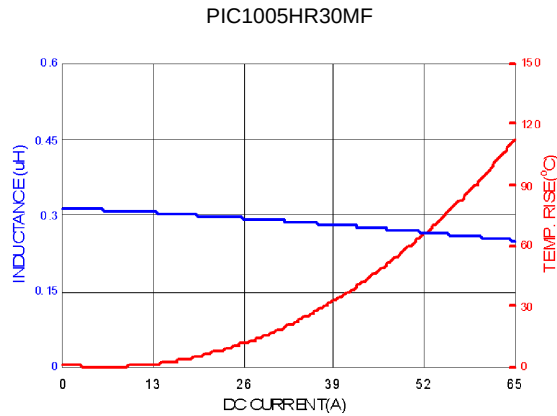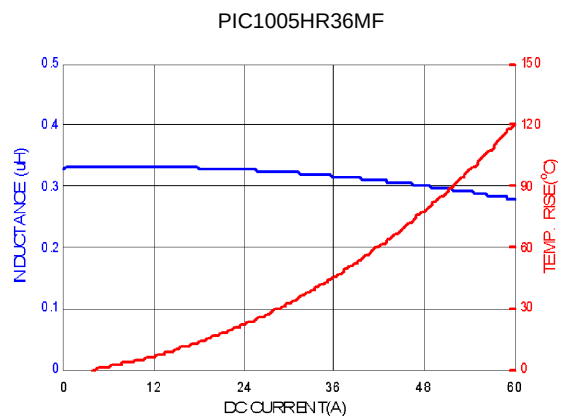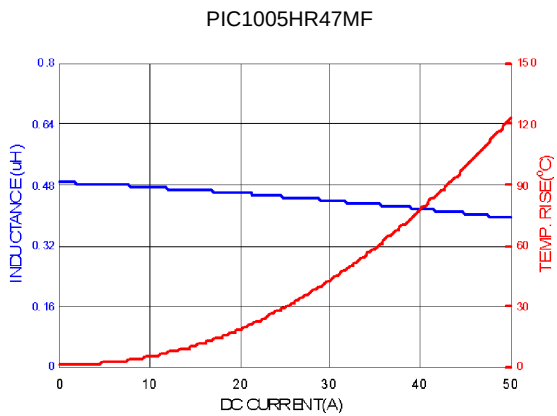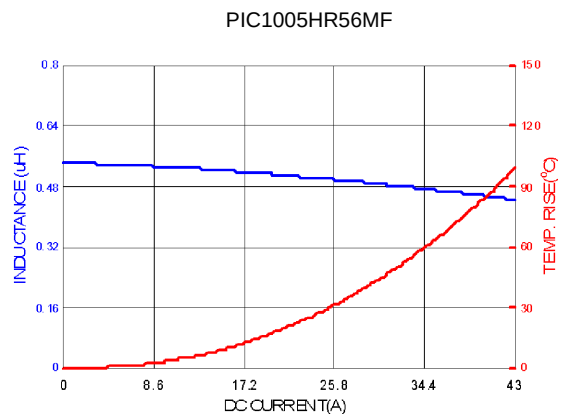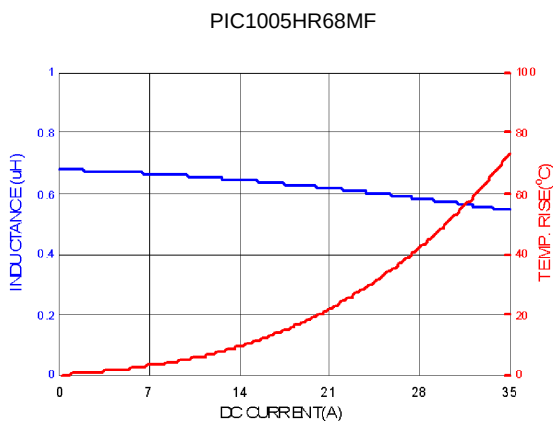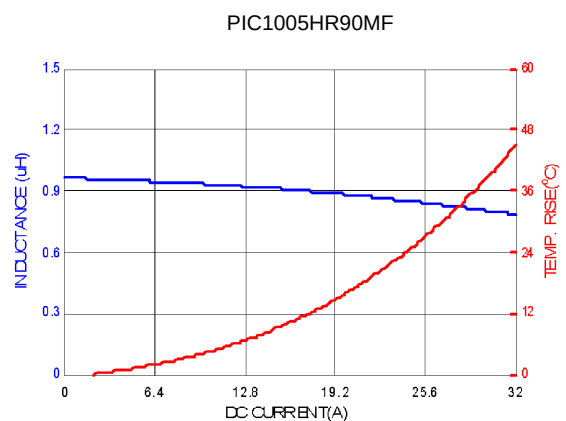

RoHS Compliant


NOTE : Specifications subject to change without notice. Please check our website for latest information.




SUPERWORLD ELECTRONICS (S) PTE LTD

06.11.2015


PIC1005H1R0MF

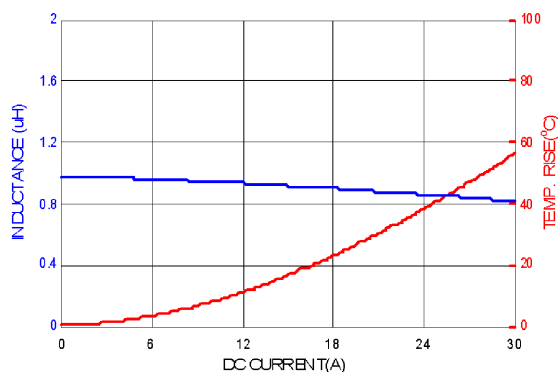


PIC1005H1R2MF

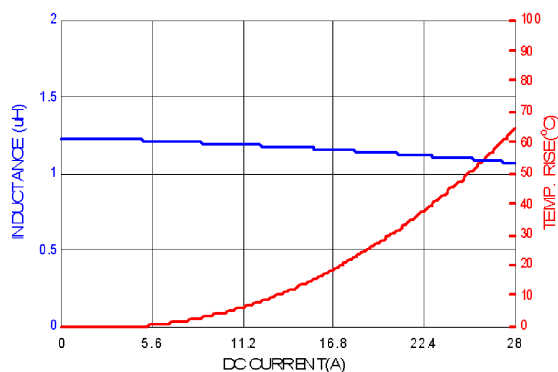


PIC1005H1R3MF

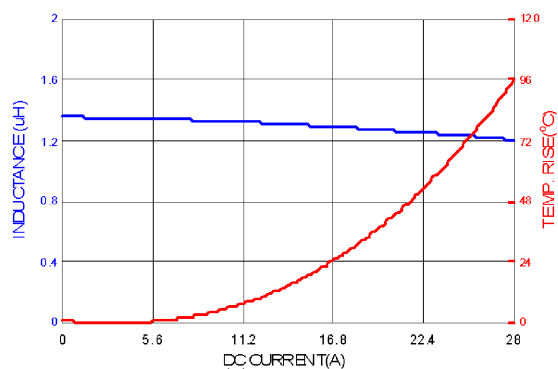


PIC1005H1R5MF

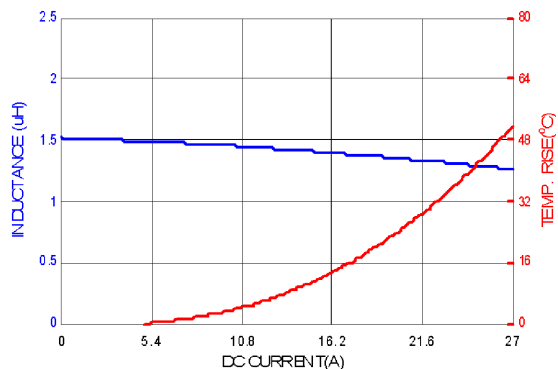

PIC1005H1R8MF

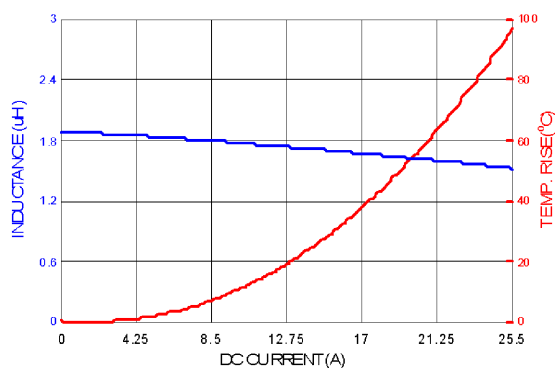

PIC1005H2R2MF

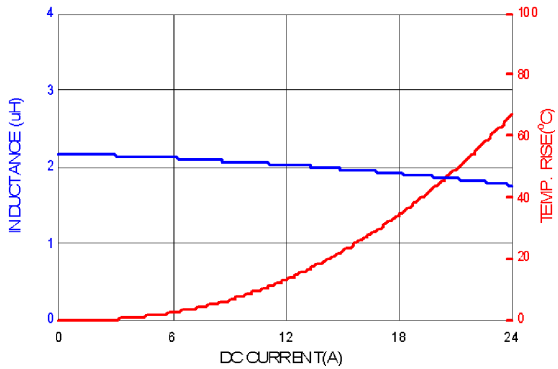

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


06.11.2015




SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 4


PIC1005H3R3MF

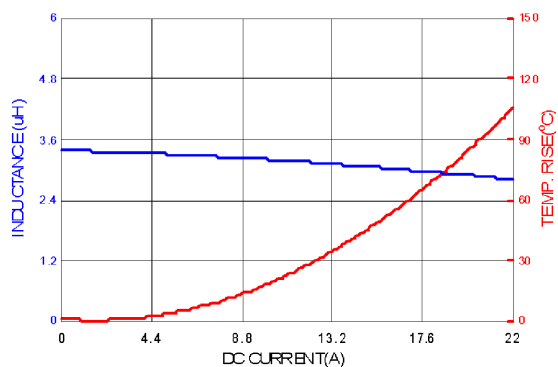


PIC1005H5R6MF

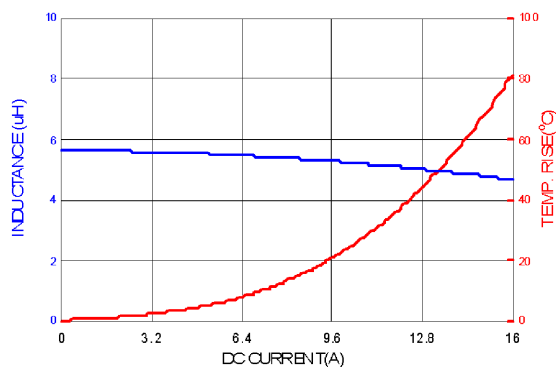


PIC1005H8R2MF

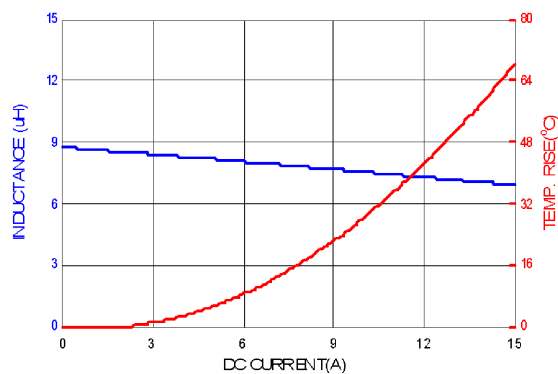


PIC1005H100MF

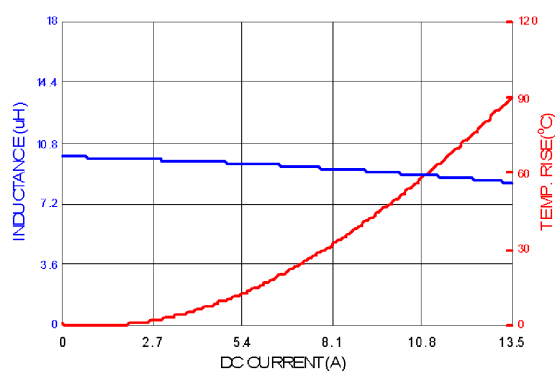

PIC1005H120MF

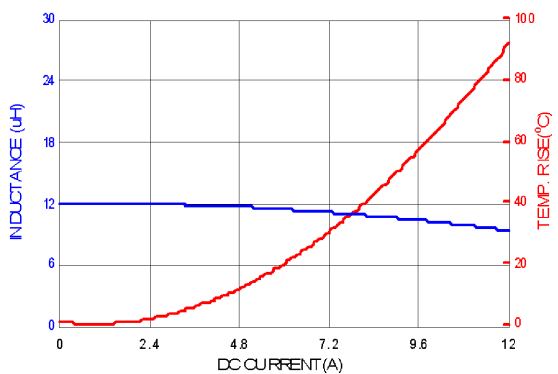

PIC1005H330MF

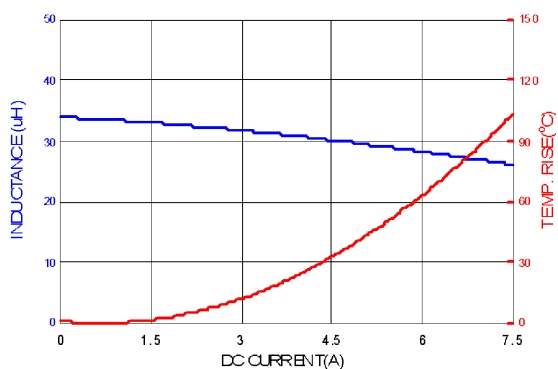

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


06.11.2015




SUPERWORLD ELECTRONICS (S) PTE LTD

PG.5

PIC1005H470MF

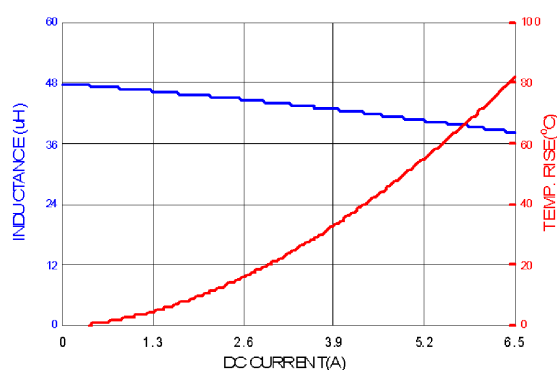

PIC1005H680MF

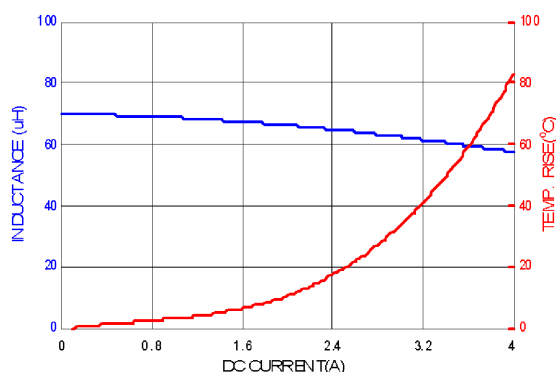

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

PG.6

8. SOLDERING

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. Our terminations are suitable for all re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

8-1.1 Solder Re-flow :

Recommended temperature profiles for re-flow soldering in Figure 1.

8-1.2 Soldering Iron (Figure 2) :

Products attachment with soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

Note :

- Preheat circuit and products to 150°C.
- 355°C tip temperature (max)
- Never contact the ceramic with the iron tip
- 1.0mm tip diameter (max)
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- Limit soldering time to 4~5 secs.

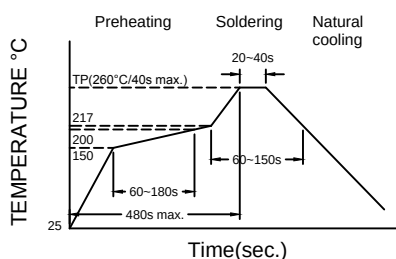


Figure 1. Re-flow Soldering: 3 times max.

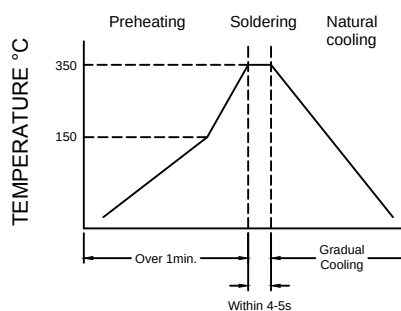


Figure 2. Hand Soldering: 1 times max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015




SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 7


9. PACKAGING INFORMATION :

9-1. Reel Dimension

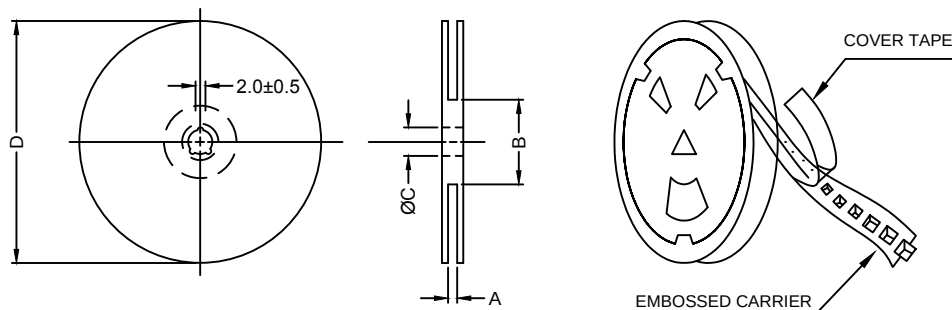

Type	A(mm)	B(mm)	C(mm)	D(mm)
13" x 24mm	24.4+2.0/-0	100±2	13.5±0.5	330

9-2. Tape Dimension

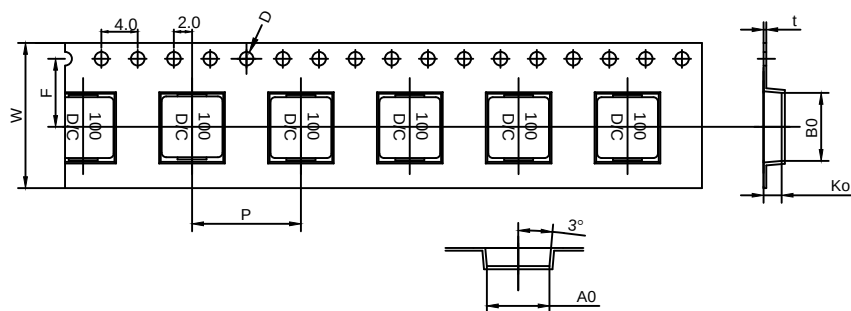

Series	Ao(mm)	Bo(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	t(mm)	D(mm)
PIC1005	10.4±0.1	11.6±0.1	5.3±0.1	16.0±0.1	24±0.3	11.5±0.1	0.35±0.05	1.5±0.1

9-3. Packaging Quantity

Size	PIC1005
Chip / Reel	500
Inner Box	1000
Carton	4000



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD

PG.8

9-4. Tearing Off Force

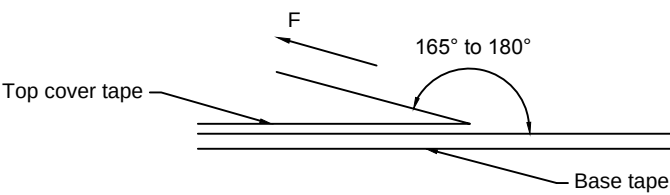

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions. (referenced ANSI/EIA-481-C-2003 of 4.11 standard)

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed (mm/min)
5~35	45~85	860~1060	300

Application Notice

- 1. Storage Conditions :
To maintain the solderability of terminal electrodes :
 - a) Recommended products should be used within 12 months from the time of delivery.
 - b) The packaging material should be kept where no chlorine or sulfur exists in the air.
- 2. Transportation :
 - a) Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 - b) Vacuum pick up is strongly recommended for individual components.
 - c) Bulk handling should ensure that abrasion and mechanical shock are minimized.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

06.11.2015



SUPERWORLD ELECTRONICS (S) PTE LTD