# Zibo Seno Electronic Engineering Co., Ltd.


淄博圣诺

# KBJ35005 - KBJ3510

## 35A GLASS PASSIVATED BRIDGE RECTIFIER

## Features

- Glass Passivated Die Construction
- High Case Dielectric Strength of 1500VRMS
- Low Reverse Leakage Current
- Surge Overload Rating to 350A Peak
- Ideal for Printed Circuit Board Applications
- Plastic Material - UL Flammability Classification 94V-0
- **Lead Free Finish/RoHS Complian**

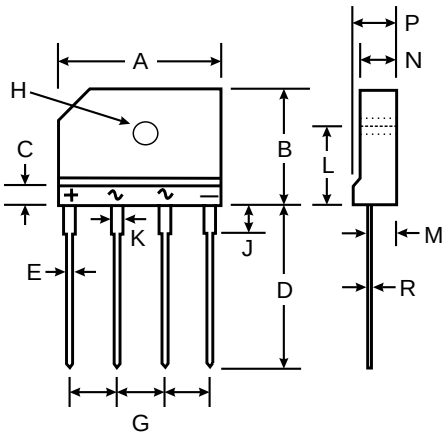


| KBJ4 | | |
|---|---|---|
| **Dim** | **Min** | **Max** |
| **A** | 24.80 | 25.20 |
| **B** | 14.70 | 15.30 |
| **C** | 4.00 Nominal | |
| **D** | 17.20 | 17.80 |
| **E** | 0.90 | 1.10 |
| **G** | 7.30 | 7.70 |
| **H** | 3.10 ∅ | 3.40 ∅ |
| **J** | 3.30 | 3.70 |
| **K** | 1.50 | 1.90 |
| **L** | 9.30 | 9.70 |
| **M** | 2.50 | 2.90 |
| **N** | 3.40 | 3.80 |
| **P** | 4.40 | 4.80 |
| **R** | 0.60 | 0.80 |
| **All Dimensions in mm** | | |

## Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads, Solderable per MIL-STD-202, Method 208
- Polarity: Molded on Body
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 in-lbs Maximum
- Weight: 6.6 grams (approx)
- Marking: Type Number

## Maximum Ratings and Electrical Characteristics

@ $T_A$ = 25°C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| Characteristic | Symbol | KBJ 35005 | KBJ 3501 | KBJ 3502 | KBJ 3504 | KBJ 3506 | KBJ 3508 | KBJ 3510 | Unit |
|---|---|---|---|---|---|---|---|---|---|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| RMS Reverse Voltage | $V_{R(RMS)}$ | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Average Forward Rectified Output Current @ $T_C$ = 100°C | $I_O$ | 35 | | | | | | | A |
| Non-Repetitive Peak Forward Surge Current, 8.3 ms single half-sine-wave superimposed on rated load (JEDEC method) | $I_{FSM}$ | 350 | | | | | | | A |
| Forward Voltage (per element) @ $I_F$ = 17.5A DC | $V_{FM}$ | 1.05 | | | | | | | V |
| Peak Reverse Current @ $T_C$ = 25°C<br>at Rated DC Blocking Voltage @ $T_C$ = 125°C | $I_R$ | 2.0<br>500 | | | | | | | μA |
| $I^2t$ Rating for Fusing (t < 8.3ms) (Note 1) | $I^2t$ | 240 | | | | | | | $A^2s$ |
| Typical Junction Capacitance per Element (Note 2) | $C_j$ | 60 | | | | | | | pF |
| Typical Thermal Resistance, Junction to Case (Note 3) | $R_{\theta JC}$ | 0.8 | | | | | | | °C/W |
| Operating and Storage Temperature Range | $T_j$, $T_{STG}$ | -55 to +150 | | | | | | | °C |

Notes: 1. Non-repetitive, for t > 1ms and < 8.3 ms.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
3. Thermal resistance from junction to case per element. Unit mounted on 300 x 300 x 1.6mm copper plate heat sink.



Download from alldatasheet.com

# KBJ35005 - KBJ3510

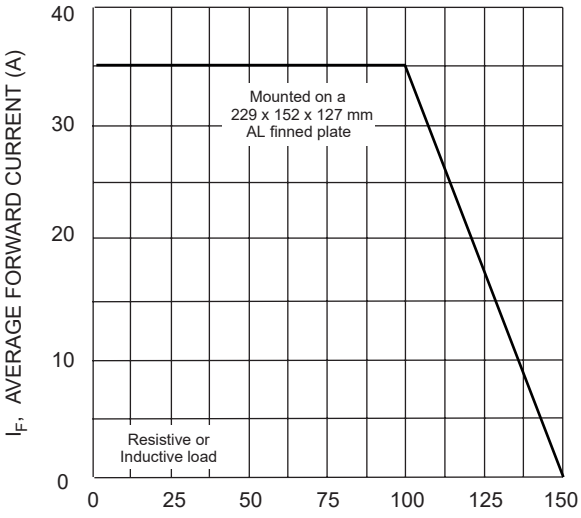



Fig. 1 Forward. Current Derating Curve

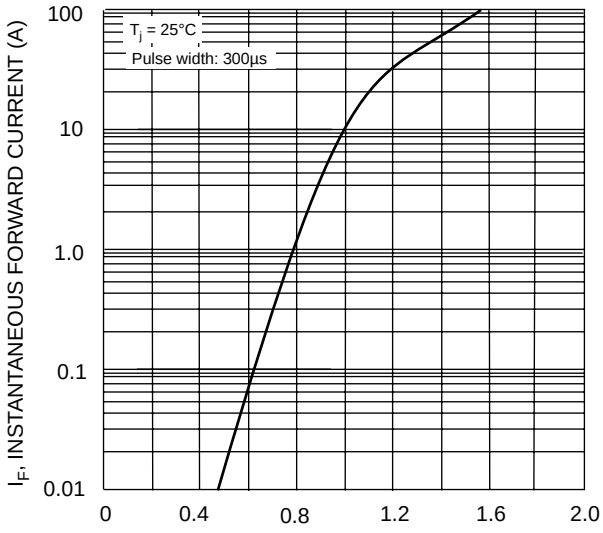



Fig. 2 Typical Forward Characteristics

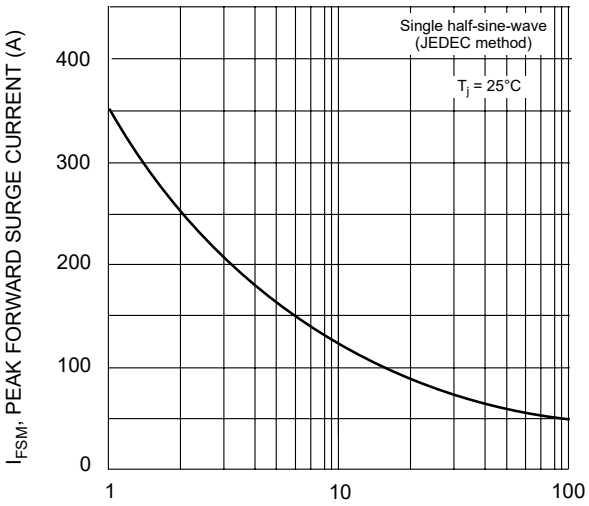



Fig. 3 Maximum Non-Repetitive Surge Current

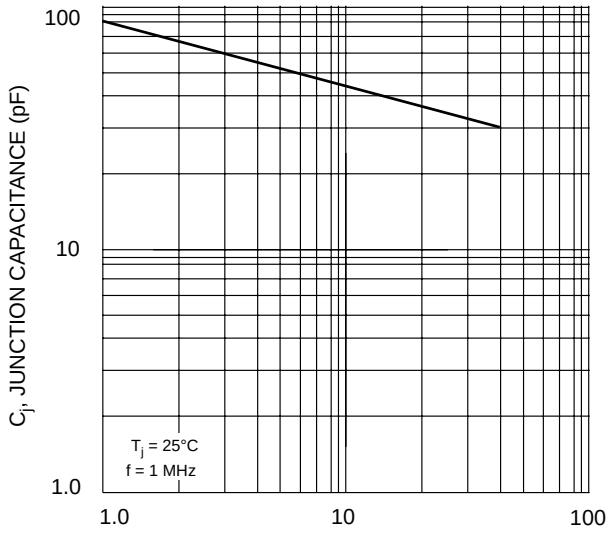



Fig. 4 Typical Junction Capacitance

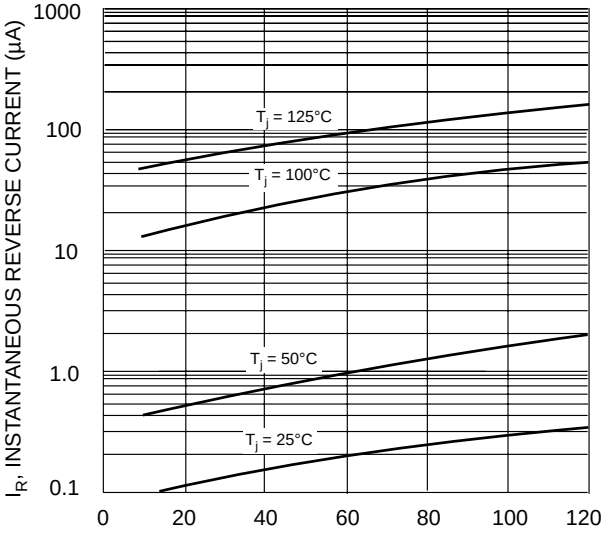



Fig. 5 Typical Reverse Characteristics



Download from alldatasheet.com