
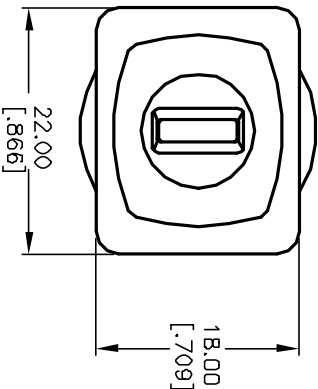
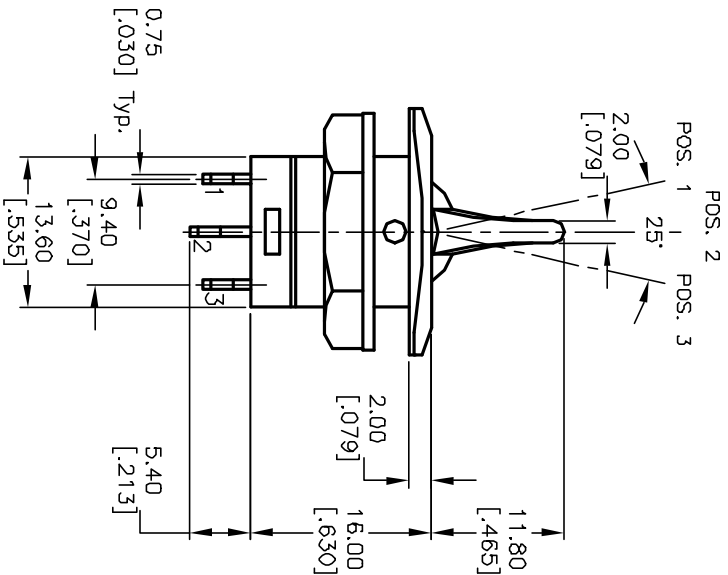
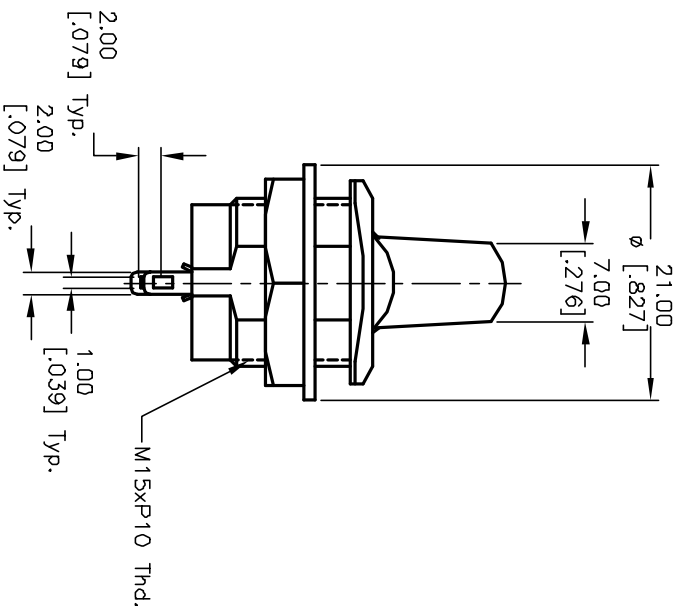


RECOMMEND PANEL MOUNTING
6MM PANEL THICKNESS MAX.



CIRCUIT: 3P, SPDT
CONTACT CONFIGURATION

▲ SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
(ON)	OFF	(ON)	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 6A @125V, 3A @250VAC
5. CONTACT RESISTANCE: 50m ohm Max. (INITIAL)
6. INSULATION RESISTANCE: DC 500V 100M ohm Min.
7. DIELECTRIC STRENGTH: AC 1500V 1 minute.
- ▲ 8. HARDWARE SHIPPED BULK.
9. ▲ DENOTES CRITICAL PARAMETER.

B	13109	UPDATE NOTES	5/7/03	AR
A	10375	RELEASED FOR PRODUCTION		
REV.	ECN NO.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE				
RR3402J 05				
E-SWITCH®				
SCALE	DATE	DR	DWG	REV
1.5:1	10/6/99	MM	F030023	B