
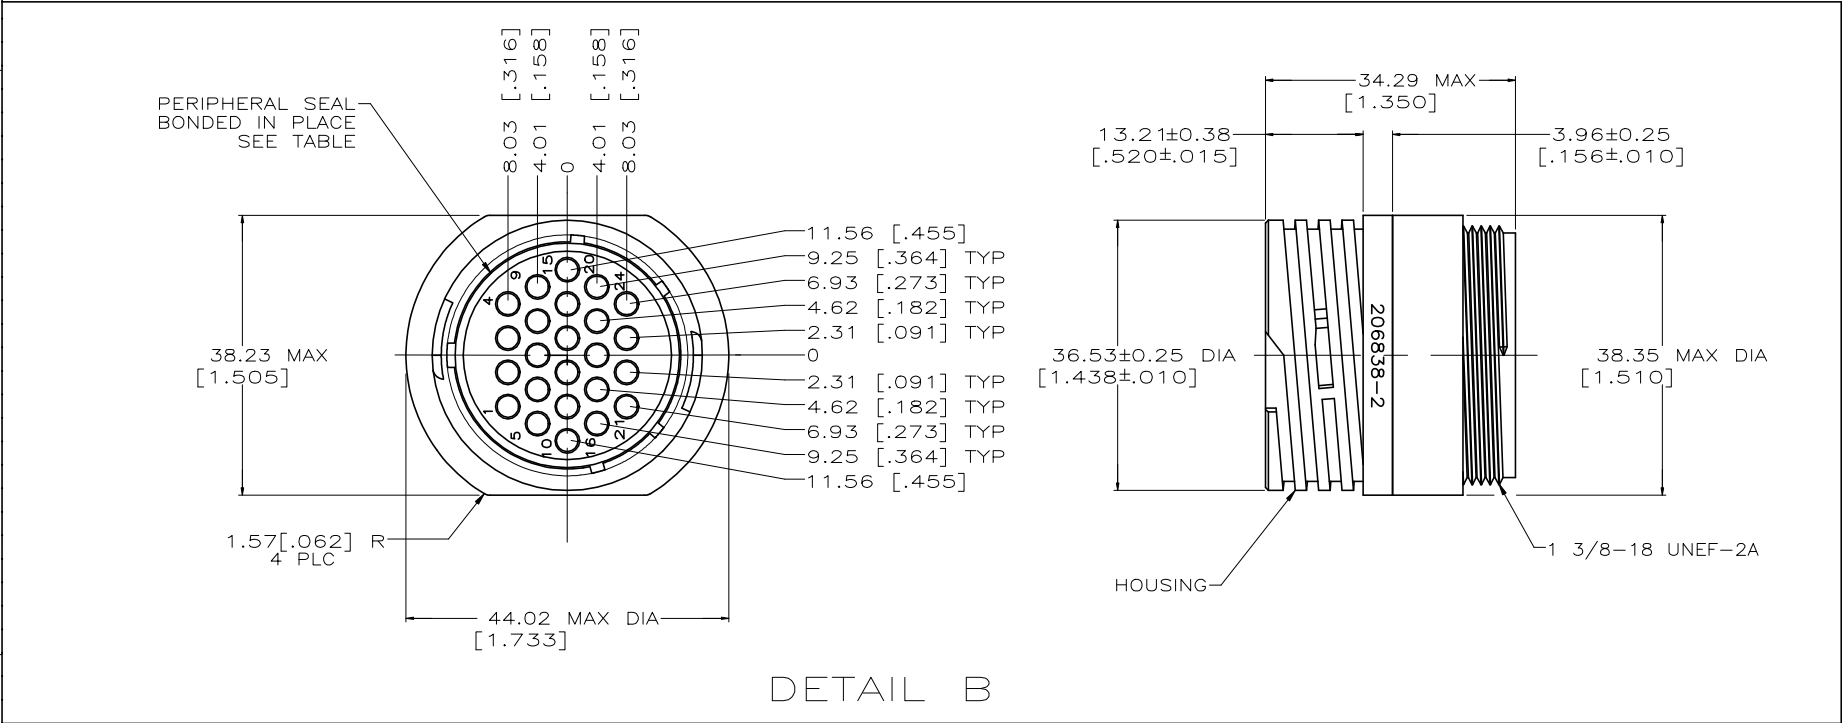


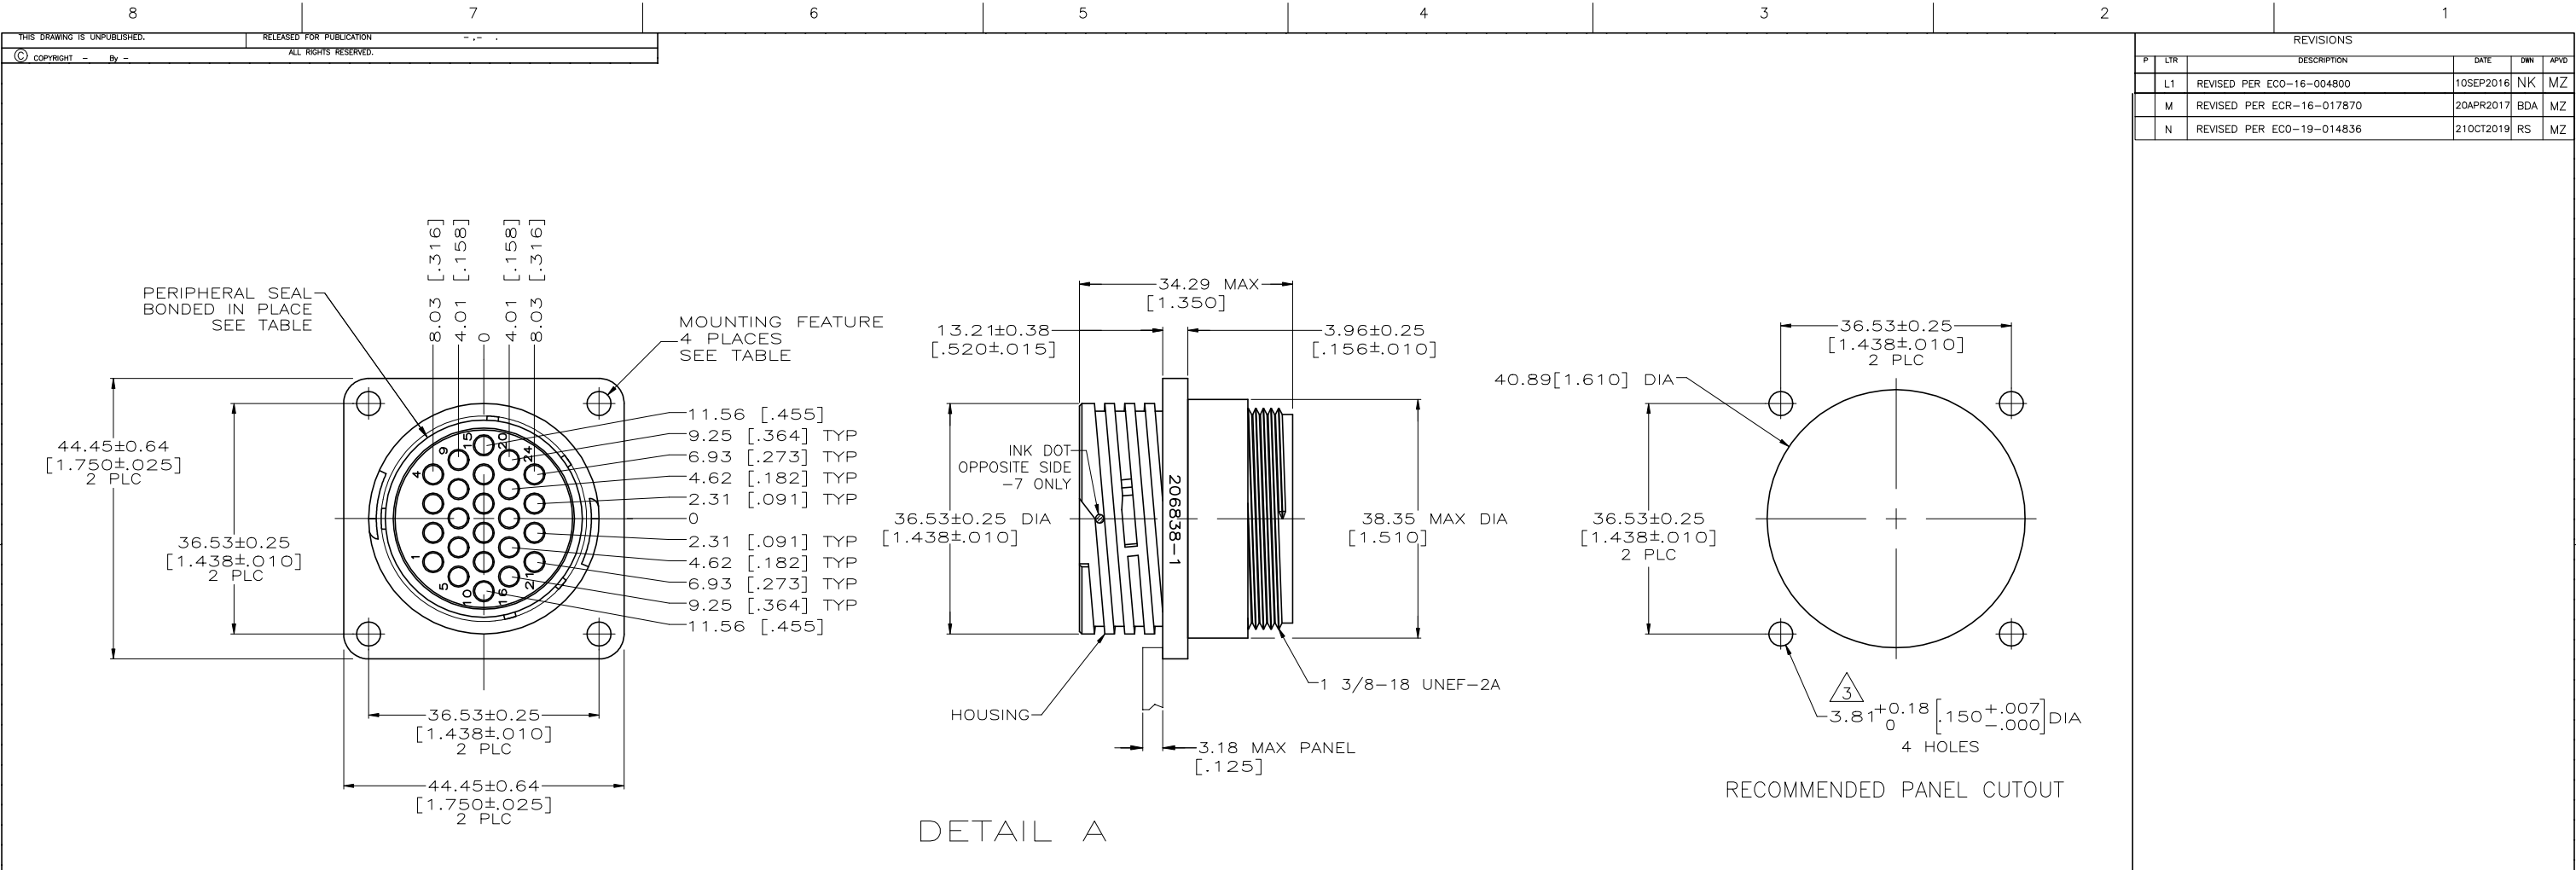

1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.

2 WILL ACCEPT (24) MULTIMATE PIN CONTACTS.

3 NO 4 FASTENER RECOMMENDED FOR MOUNTING.

4 MAXIMUM INSULATION NOT TO EXCEED .150 DIA.

5 WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

6 MATERIALS
HOUSING: PA66, BLACK
PERIPHERAL SEAL: NITRILE BUTADIENE RUBBER, BLACK
THREADED INSERTS: BRASS

#4-40 THREADED INSERTS	STANDARD	YES	A	1-206838-0
#4-40 THREADED INSERTS	STANDARD	NO	A	206838-9
3 OBSOLETE Ø3.81 (.150) MOUNTING HOLES	STANDARD	YES	A	206838-8
3 OBSOLETE Ø3.81 (.150) MOUNTING HOLES	STANDARD	YES	A	206838-7
3 OBSOLETE Ø3.81 (.150) MOUNTING HOLES	SMALL PACK	NO	A	206838-5
Ø3.81 (.150) MOUNTING HOLES	STANDARD	YES	B	206838-4
	STANDARD	YES	A	206838-3
	STANDARD	NO	B	206838-2
	STANDARD	NO	A	206838-1
MOUNTING FEATURE	PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. GELTZ CHK R. STONE APVD 10/28/92 08/11/93	TE Connectivity	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-10024	RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC	
Ø	0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	APPLICATION SPEC -	SIZE A1	CAGE CODE 00779
MATERIAL 6	FINISH -	WEIGHT -	DRAWING NO C=206838	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV N