

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0716612568

Status:

Active

Overview:

ebbi_50d

Description:

1.27mm (.050") Pitch EBBI™ 50D Plug, Right Angle, Blind-Mate, 68 Circuits, 2.79mm (.110") PC Tail Length

Documents:	
3D Model	Product Specification PS-71660 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71661
Application	Board-to-Board, Wire-to-Board
Overview	ebbi_50d
Product Name	EBBI™

Physical

Breakaway	No
Circuits (Loaded)	68
Circuits (maximum)	68
Color - Resin	Black
Durability (mating cycles max)	2,000
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.110 In
PC Tail Length (mm)	2.79 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Pitch - Term. Interface (in)	0.050 In
Pitch - Term. Interface (mm)	1.27 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	50
Plating min: Termination (µm)	1.30
Polarized to Mating Part	Yes
Polarized to PCB	Yes

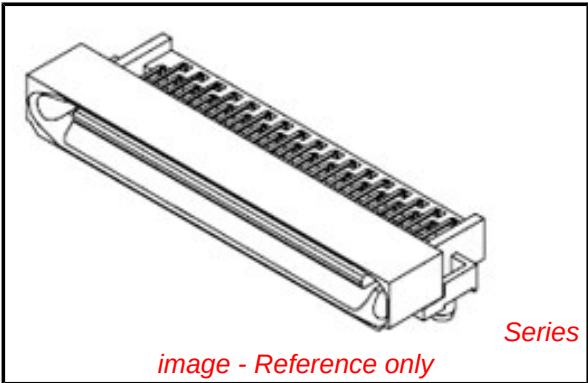

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

71661Series


Mates With

EBBI™ 50D Receptacle 71660 , 87537



Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	1A
Voltage - Maximum	30V
Solder Process Data	
Lead-free Process Capability	SMC & Wave Capable (TH only)
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-084*
Product Specification	PS-71660
Sales Drawing	SDA-71661-25**

This document was generated on 05/31/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

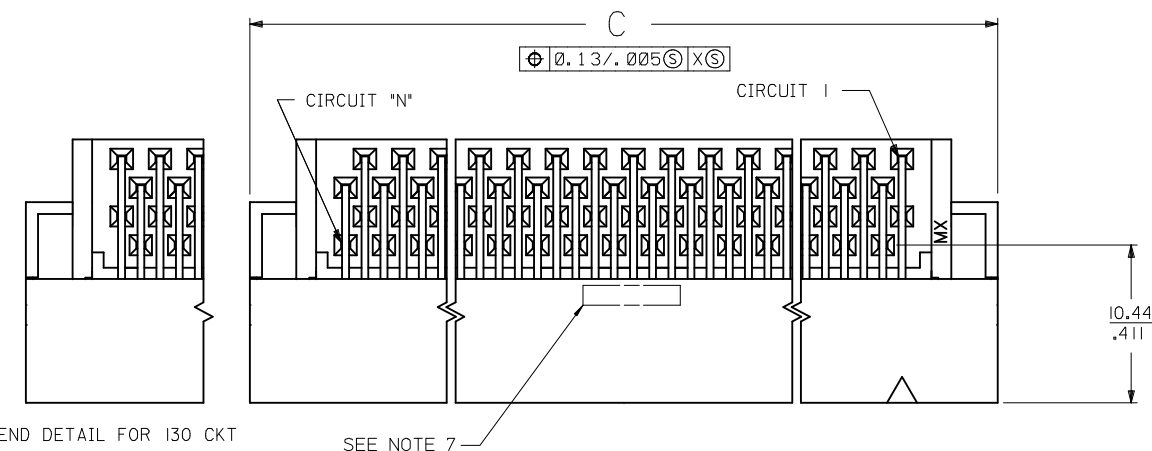


- NOTES:
1. MATERIAL:
HOUSING: LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0,
COLOR: BLACK
TERMINALS: BRASS
 2. FINISH:
TERMINAL: 0.76 MICROMETERS/30 MICROINCHES MINIMUM SELECTIVE GOLD
IN CONTACT AREA; 1.27 MICROMETERS/50 MICROINCHES MINIMUM
SELECTIVE TIN IN THE PC TAIL AREA; NICKEL UNDERPLATE OVERALL.
 3. CONFORMS TO PRODUCT SPEC: PS-71660
 4. PRODUCT PACKAGED PER PK-70873-084*
 5. ASSEMBLY MATES WITH MOLEX P/N SDA-71660-7***
 6. RECOMMENDED PC BOARD THICKNESS IS 1.6 MM/.062 IN
 7. FOUR DIGIT DATE CODE (WK.YR.) EXAMPLE 26 96 LOCATED IN AREA SHOWN

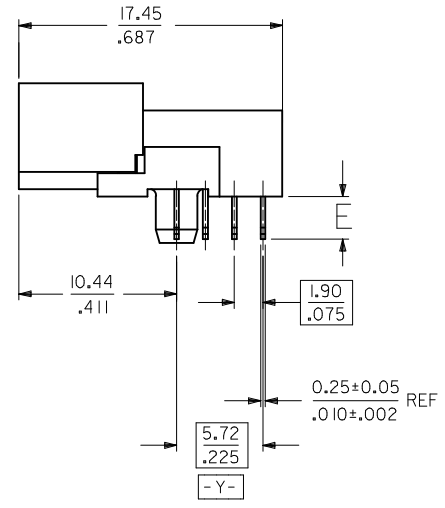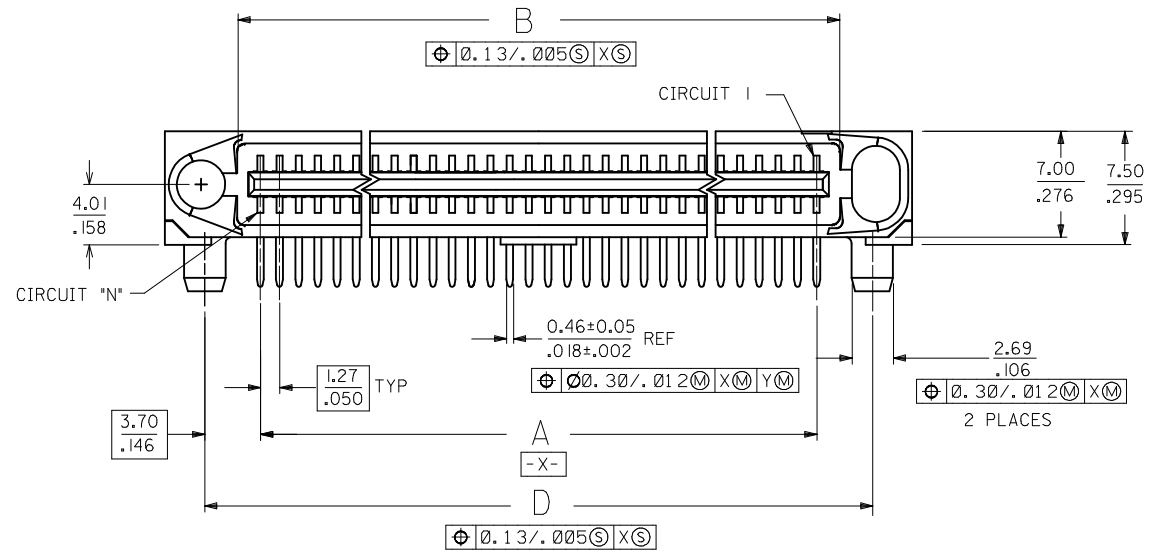

CHANGE MATERIAL EC NO: UCP2009-1254 DRWN:MSIBARRA 2008/12/19 CHKD:BSMART 2009/01/06 APPR:SMILLER 2009/01/06 K	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
					DRAWN BY	DATE	TITLE SALES ASSMBLY EBBI 50D RIGHT ANGLE BLIND MATE PLUG			
					CHECKED BY	DATE				
					RAN	1995/04/26				
					APPROVED BY	DATE				
					CAB	1995/04/26	 MOLEX INCORPORATED			
					MATERIAL NO.	DOCUMENT NO.				SHEET NO.
					SEE TABLE		SDA-71661-25**			1 OF 2
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

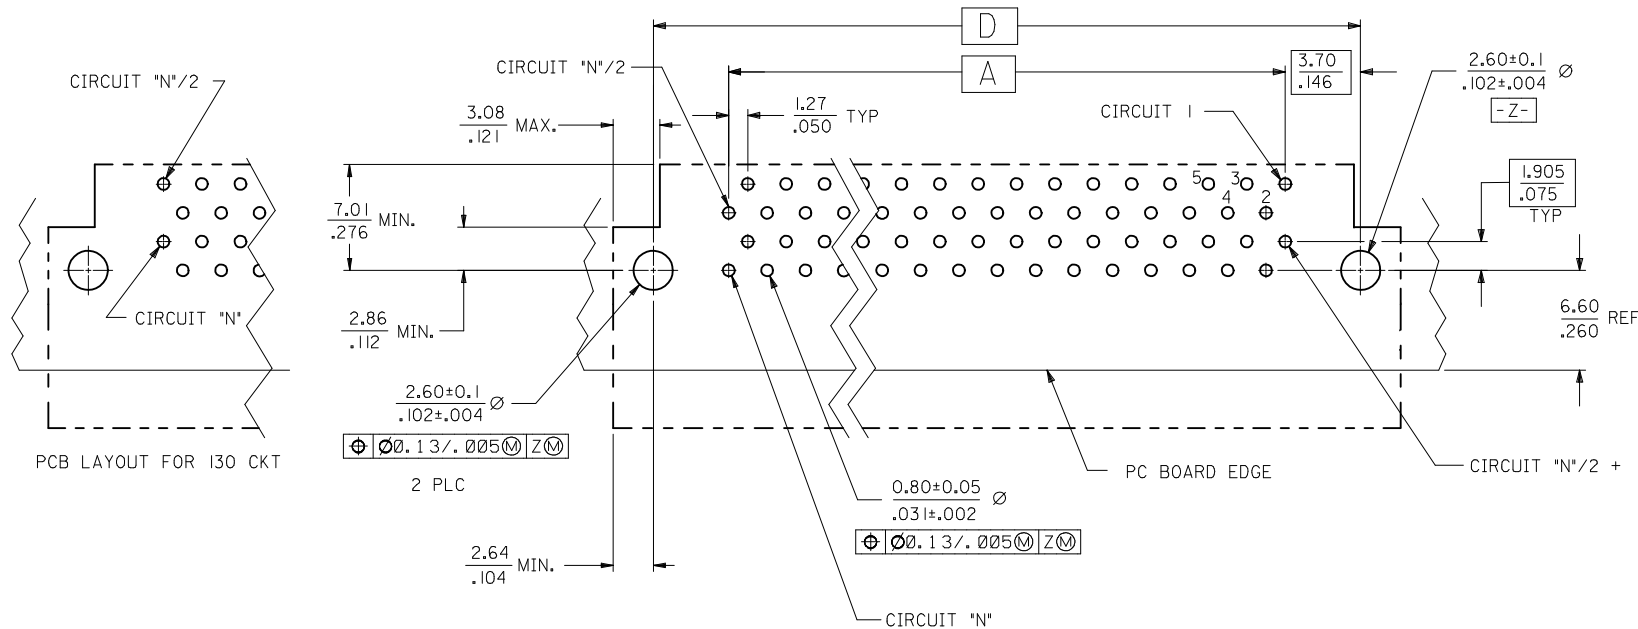

RECOMMENDED PC BOARD LAYOUT
COMPONENT SIDE
SEE NOTE 6

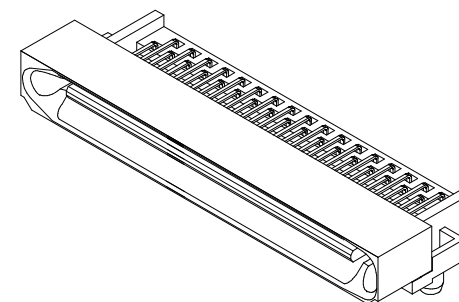

68 CIRCUIT ASSEMBLY SHOWN
SCALE 2:1

3.491 (88.67)	3.699 (93.95)	3.320 (84.33)	3.200 (81.28)	.110 (2.79)	130	71661-2513
2.741 (69.63)	2.949 (74.90)	2.570 (65.28)	2.450 (62.23)	.110 (2.79)	100	71661-2511
2.241 (56.92)	2.449 (62.20)	2.070 (52.586)	1.950 (49.53)	.110 (2.79)	80	71661-2580
1.941 (49.31)	2.149 (54.58)	1.770 (44.96)	1.650 (41.91)	.110 (2.79)	68	71661-2568
1.941 (49.31)	2.149 (54.58)	1.770 (44.96)	1.650 (41.91)	.125 (3.18)	68	71661-2518
1.241 (31.53)	1.449 (36.80)	1.070 (27.18)	.950 (24.13)	.110 (2.79)	40	71661-2540
D	C	B	A	E	CKT (*N*)	ITEM NUMBER

REV	DESCRIPTION
1	UPDATE REV LEVEL
2	EC NO: UCP2009-1254
3	DRWN:MSBARRA 2008/12/19
4	CHKD:BSMART 2009/01/06
5	APPR:SMILLER 2009/01/06
6	REV

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	
▽=0	
	mm INCH
	4 PLACES ± --- ± ---
	3 PLACES ± --- ± .010
	2 PLACES ± 0.25 ± ---
	1 PLACE ± --- ± ---
	ANGULAR ± 1/2°
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM/IN	4:1	INCH	
DRAWN BY	DATE	TITLE	
RAN	1995/04/26	SALES ASSMBLY	
CHECKED BY	DATE	EBBI 50D RIGHT ANGLE	
RAN	1995/04/26	BLIND MATE PLUG	
APPROVED BY	DATE	MOLEX INCORPORATED	
CAB	1995/04/26	SDA-71661-25**	
MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
SEE TABLE		2 OF 2	
SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		