
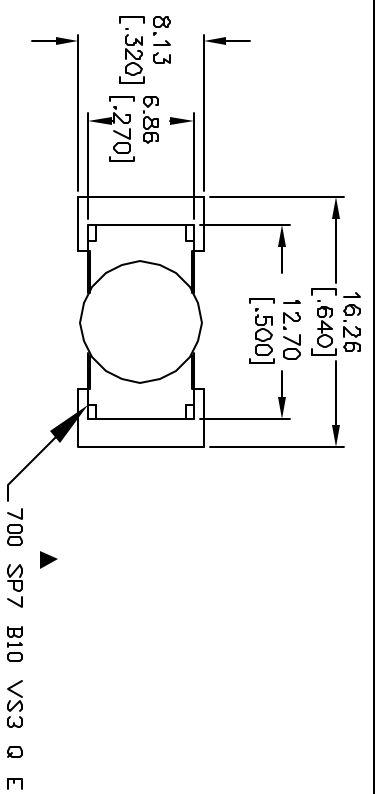
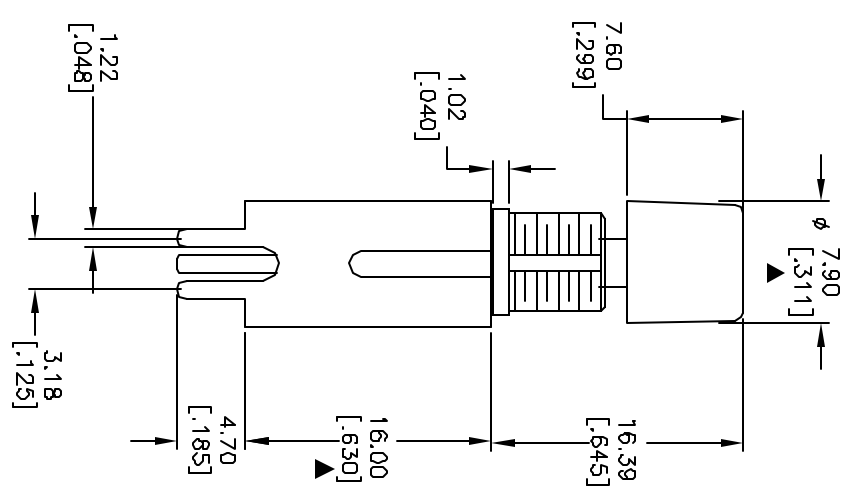


SWITCH FUNCTION	
DN	<DN>
1-3	1-2

< > = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 1A @ 250VAC; 3A @ 125VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI-ohms initial
@2-4VDC
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

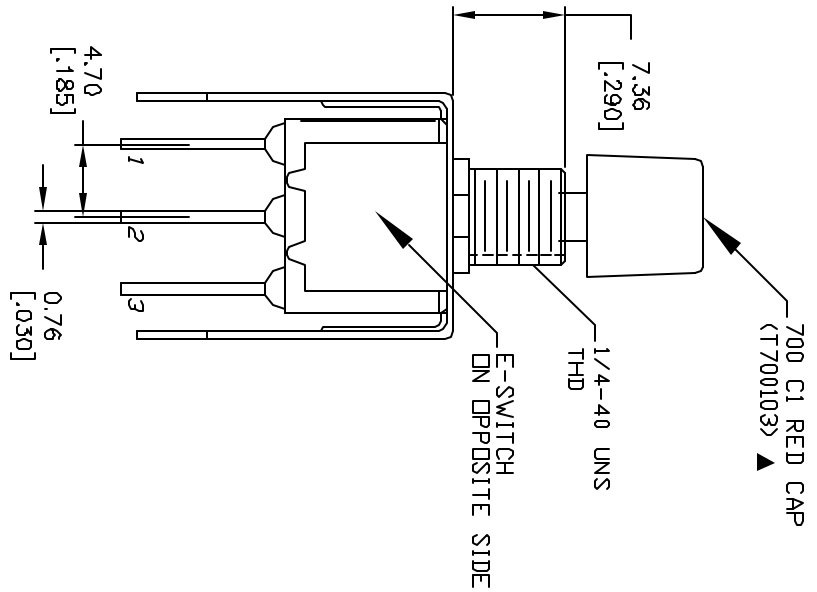

E-SWITCH®

TITLE		DATE		DR		DWG		REV	
700 SP-7 B10 VS3 Q E (C1 RED CAP)		2/12/03		RC		XT0109P		A	
RELEASED FOR PRODUCTION		2/12/03		CJB		CHKD			
REV.		ECN No.		DESCRIPTION		DATE		CHKD	
A		12809		RELEASED FOR PRODUCTION		2/12/03		CJB	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED