
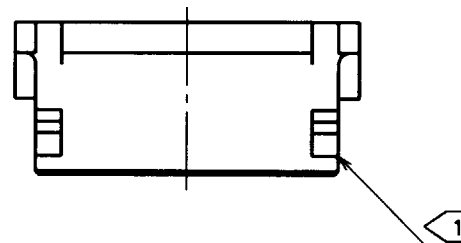
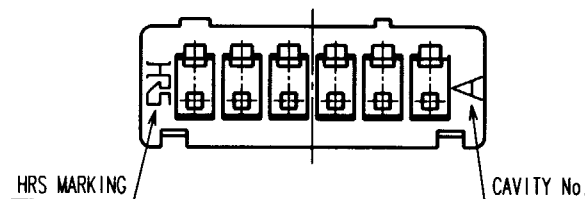
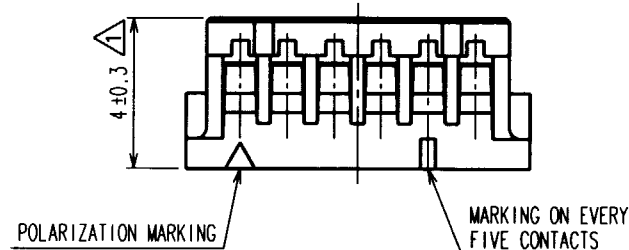


Mar.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

A
B
C
D
E
F

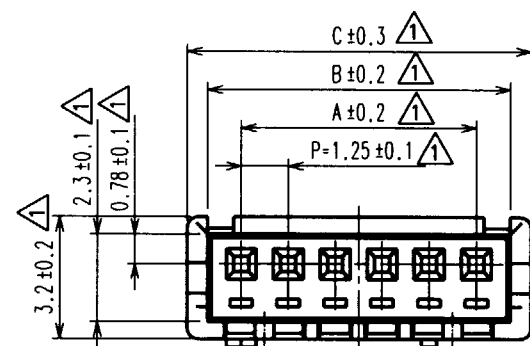


HRS DRAWING FOR REFERENCE

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
10	RE-H-03529	I.Y	C.H	20.05.30					

CODE No.	NUMBER OF CONTACTS	A	B	C
CL536-0001-4	2	1.25	3.05	4.15
CL536-0002-7	3	2.50	4.30	5.40
CL536-0003-0	4	3.75	5.55	6.65
CL536-0004-2	5	5.00	6.80	7.90
CL536-0005-5	6	6.25	8.05	9.15
CL536-0006-8	7	7.50	9.30	10.40
CL536-0007-0	8	8.75	10.55	11.65
CL536-0008-3	9	10.00	11.80	12.90
CL536-0009-6	10	11.25	13.05	14.15
CL536-0010-5	11	12.50	14.30	15.40
CL536-0011-8	12	13.75	15.55	16.65
CL536-0012-0	13	15.00	16.80	17.90
CL536-0013-3	14	16.25	18.05	19.15
CL536-0014-6	15	17.50	19.30	20.40

NOTE 1: WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK SHALL BE SET AT THE CENTER OF HOUSING. IF MORE THAN FOUR, THE TWO LOCKS SHALL BE SET AS SHOWN ON THIS DRAWING.

		1		POLYAMIDE		BEIGE,UL94V-0							
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS			
CODE NO.(OLD)				DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
				T.Goi		I.Tashiro		K.Akiyama		M.Yamamoto			
				'94. 4.16		'94. 4.19		'94. 4.25		'94. 4.25			
		DRAWING NO.				PART NO.							
SCALE		EDC3-083675				DF13-*S-1.25C							
5 : 1													
UNITS		HRS				CODE NO.		CL536-					
mm		HIROSE ELECTRIC CO., LTD						1/1					

1 2 3 4 5 6 7 8

