

VI TELEFILTER**Filter specification****TFS 1080****1/5****Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance:		
Input:	50	Ω
Output:	50	Ω

Characteristics**Remark:**

The nominal frequency f_N is fixed at 1080,0MHz. The insertion loss a_e is defined as loss value determined at f_N . All specified data are met within the operating temperature range.

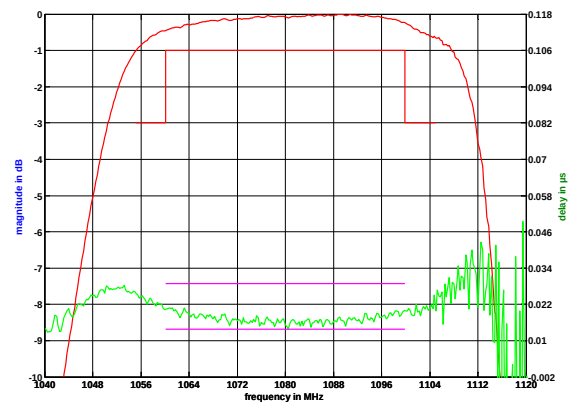
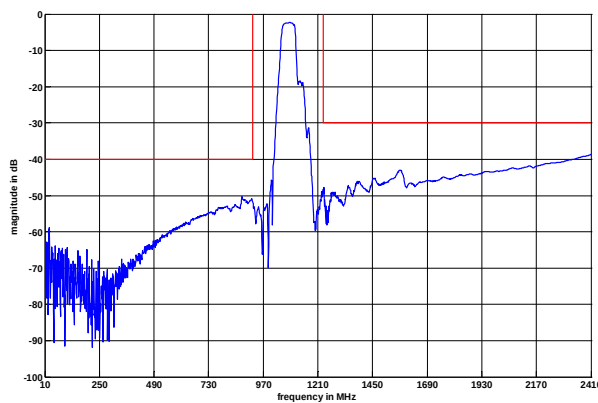
D a t a					typ. value		tolerance / limit				
Insertion loss					a _e	2,4	dB	max.	3,0	dB	
Nominal frequency					f _N	-			1080,0	MHz	
Passband 1					PB1	53,0	MHz	f _N	±	15,0	MHz
Pass band ripple		p-p				0,4	dB	max.	1,0	dB	
Passband 2					PB2	61,0	MHz	f _N	±	20,0	MHz
Pass band ripple 2		p-p				1,0	dB	max.	3,0	dB	
Absolute attenuation					a _{abs}						
1	MHz	...	919	MHz	50	dB	min.	40	dB		
1240	MHz	...	2160	MHz	42	dB	min.	30	dB		
2160	MHz	...	2398	MHz	38	dB	min.	30	dB		
Group delay variation within PB1						8	ns	max.	15	ns	
Return loss within PB1						18	dB	min.	10	dB	
Input power level						-		max.	10	dBm	
Operating temperature range					OTR	-		- 40 °C ... + 85 °C			
Storage temperature range						-		- 40 °C ... + 85 °C			
Temperature coefficient of frequency					TC _f *	- 72	ppm/K		-		

*) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_0) \times f_{T0}(\text{MHz})$.

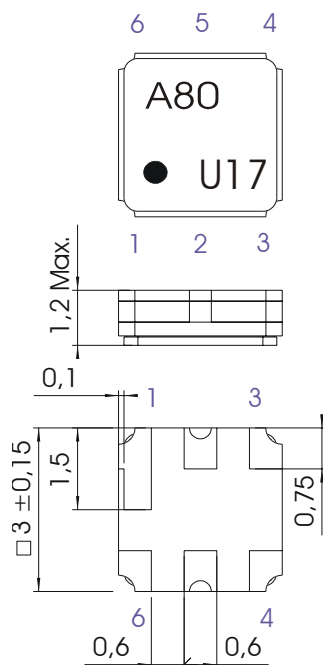
Generated:**Checked / Approved:**

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 1080****2/5****Filter characteristic****Construction and pin connection**

(All dimensions in mm)



1	Ground
2	Input
3	Ground
4	Ground
5	Output
6	Ground

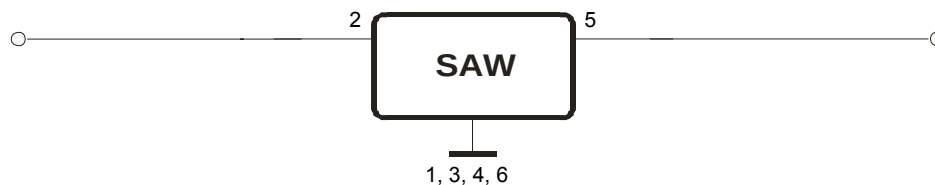
Date code: Year + week

U 2006

V 2007

W 2008

...

50 Ohm Test circuit**Tele Filter GmbH****Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 1080****3/5****Stability characteristics, reliability**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

This filter is RoHS compliant (2002/95/EG, 2005/618/EG)

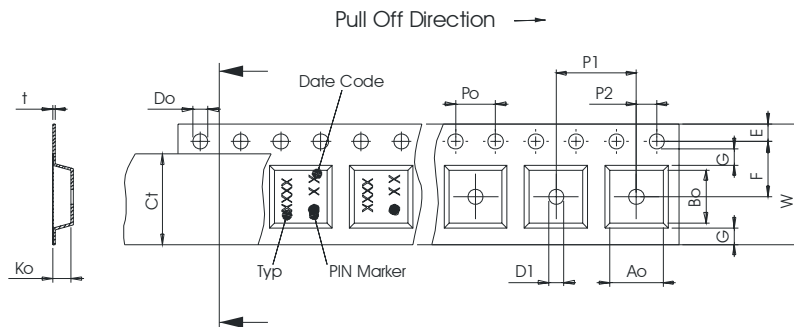
Packing

Tape & Reel: IEC 286 – 3, with exeption of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

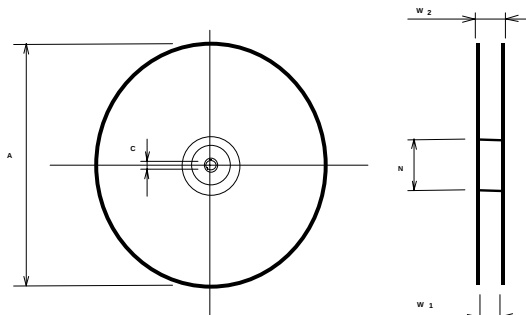
max. pieces of filters peer reel:	9000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)

W	: 8,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 3,50 ± 0,05
G(min)	: 0,75
P2	: 2,00 ± 0,05
P1	: 4,00 ± 0,1
D1(min)	: 1,50
Ao	: 3,25 ± 0,1
Bo	: 3,25 ± 0,1
Ct	: 5,5 ± 0,1

**Reel (all dimensions in mm)**

A	: 330
W1	: 8,4 +1,5/-0
W2(max)	: 14,4
N(min)	: 50
C	: 13,0 +0,5/-0,2



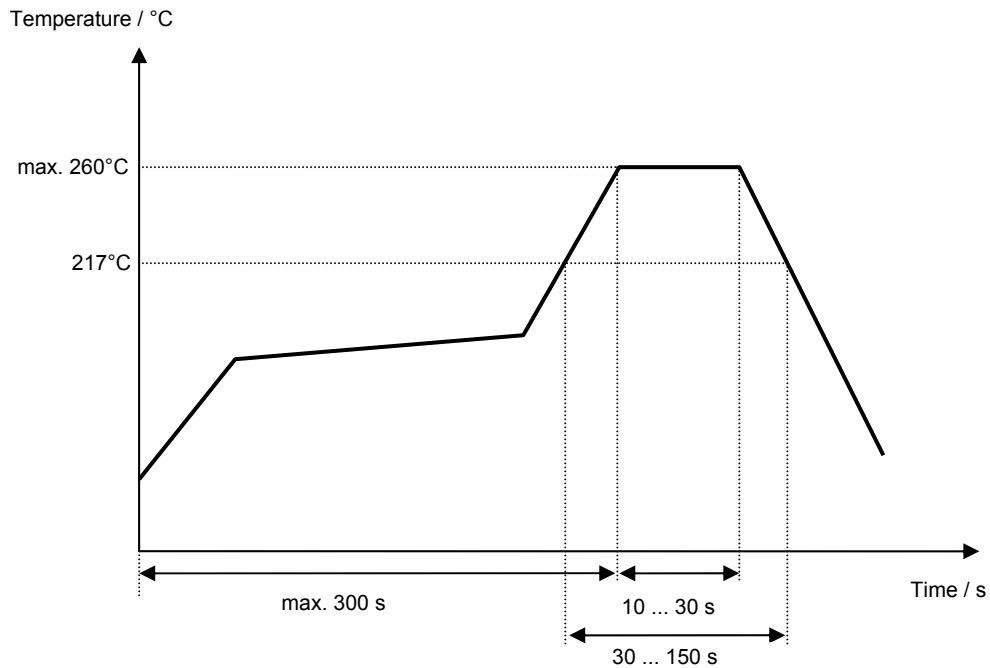
The minimum bending radius is 45 mm.

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

Chip-mount air reflow profile

VI TELEFILTER**Filter specification****TFS 1080****5/5****History**

Version	Reason of Changes	Name	Date
1.0	- generation of development specification	Strehl	19.01.2006
1.1	- add typ. value and filter characteristic	Strehl	27.04.2006

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.