
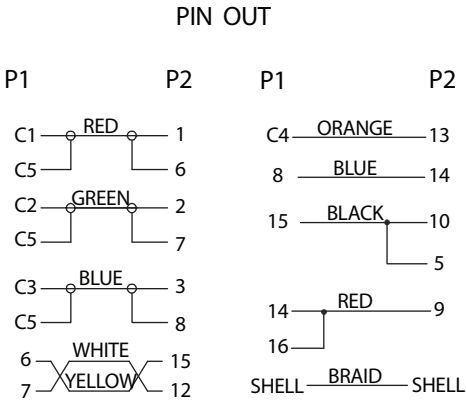
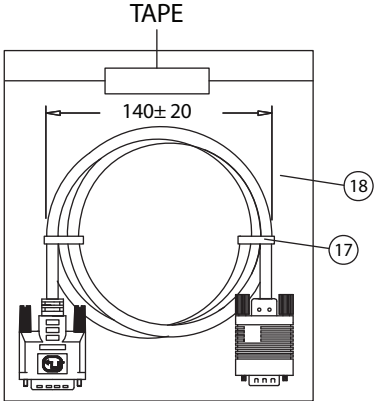


| REVISION |             |      |          |
|----------|-------------|------|----------|
| REV.     | DESCRIPTION | DATE | APPROVED |
|          |             |      |          |
|          |             |      |          |

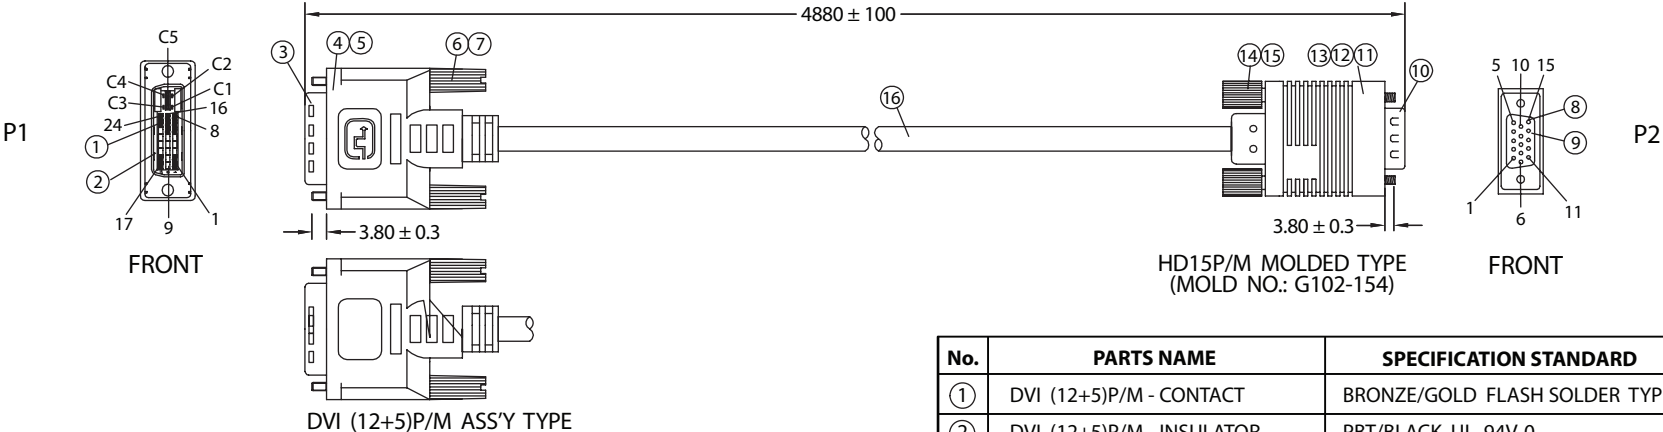

#### NOTES:

- CABLE: UL20276  
(28AWG+SP+FOIL)x3C+28AWGx4C+28AWGx1P+MYLAR+FOIL+BD  
OUTER JACKET: BEIGE, OD: 6.5 ± 0.2mm  
PRINTING: "E166307  AWM 20276 28AWG 80°C 30V VW-1  
LOW VOLTAGE COMPUTER CABLE"
- CONNECTORS: DVI (12+5)P/M-HD15P/M
- HOOD: ASS'Y TYPE, COLOR: BEIGE
- ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MISS WIRE TEST  
<2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.  
<3>.CONDUCTOR RESISTANCE: 1 ohm MAX.
- PACKING: 1PC/POLYBAG

| No. | PARTS NAME                | SPECIFICATION STANDARD        | QTY |  |
|-----|---------------------------|-------------------------------|-----|--|
| ①   | DVI (12+5)P/M - CONTACT   | BRONZE/GOLD FLASH SOLDER TYPE | 17  |  |
| ②   | DVI (12+5)P/M - INSULATOR | PBT/BLACK UL 94V-0            | 1   |  |
| ③   | DVI (12+5)P/M - SHELL     | STEEL GOLD PLATED             | 1   |  |
| ④   | DVI (12+5)P/M - CAN       | STEEL TIN PLATED              | 1   |  |
| ⑤   | DVI (12+5)P/M - COVER     | 45P PVC/COLOR: BEIGE          | 1   |  |
| ⑥   | THUMB SCREW               | #4-40 2.8x45, GOLD PLATED     | 2   |  |
| ⑦   | SCREW MOLD                | 35P PVC/COLOR: BEIGE          | 2   |  |
| ⑧   | HD15P/M - CONTACT         | BRASS GOLD FLASH SOLDER TYPE  | 15  |  |
| ⑨   | HD15P/M - INSULATOR       | PBT/BLACK UL 94V-0            | 1   |  |
| ⑩   | HD15P/M - SHELL           | STEEL GOLD PLATED             | 1   |  |
| ⑪   | HD15P/M - INNER MOLD      | PE NATURAL                    | 1   |  |
| ⑫   | HD15P/M - COPPER FOIL     | WIDTH: 28mm                   | 1   |  |
| ⑬   | HD15P/M - OUTER MOLD      | 45P PVC/COLOR: BEIGE          | 1   |  |
| ⑭   | HD15P/M - THUMB SCREW     | UNC #4-40 Ø4xL50, GOLD PLATED | 2   |  |
| ⑮   | HD15P/M - SCREW MOLD      | 35P PVC/COLOR: BEIGE          | 2   |  |
| ⑯   | CABLE DVI 12+5 UL20276    | L03010ABK01A                  | 1   |  |
| ⑰   | MINI TIE                  | PE/BLACK                      | 2   |  |
| ⑱   | POLYBAG                   | PE/0.8x200x250                | 1   |  |

| Dim range (mm) | Tolerance +/- (mm) | ualtek Electronics Corp.<br>WCI DIVISION |                |                 |
|----------------|--------------------|------------------------------------------|----------------|-----------------|
|                |                    | Part Number: 1321032-16                  | RoHS Compliant |                 |
| 0-1            | 0.15               | Description: DVI (12+5)P/M - HD15P/M     |                |                 |
| 1-6            | 0.20               |                                          |                |                 |
| 6-18           | 0.30               |                                          |                |                 |
| 18-50          | 0.50               |                                          |                |                 |
| 50-120         | 0.70               | Drawn / Date                             | Checked / Date | Approved / Date |
| 120-250        | 0.90               | B.Grubb<br>01-24-07                      | 01-24-07       | JJH / 01-24-07  |
| 250-500        | 1.20               |                                          |                |                 |