




Verpackt in Gurtverpackung - *Tape on Reel Packaging*
Verpackungseinheit: 850 Stück - *Packaging unit: 850 pcs*

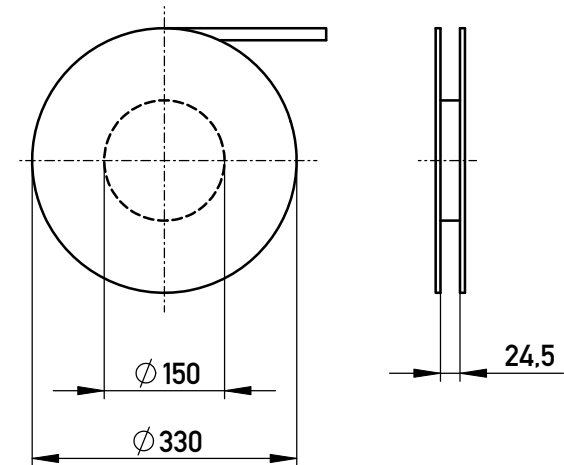

Kontaktbezeichnung bei Pin 1
contact marking at pin 1

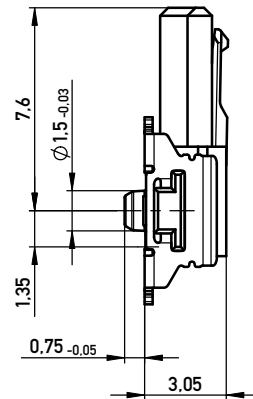


max. 3.7 zur Leiterplattenkante
max. 3.7 to board edge

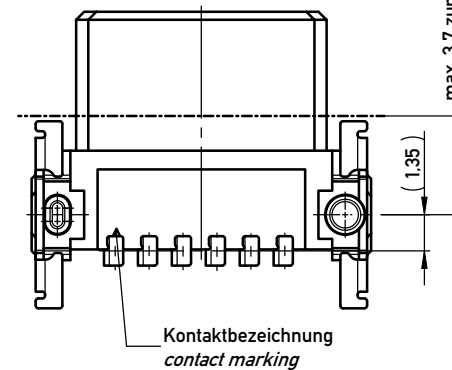

— Kontaktbezeichnung
contact marking

Abspulrichtung - *Reel off Direction*

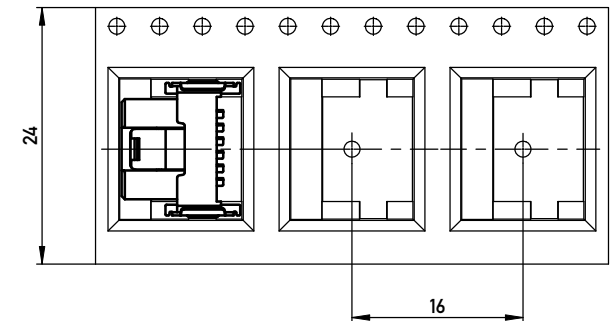

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 μm
Terminal Area 4-6 μm tin plating

Koplanarität der Anschlüsse $\leq 0,1 \text{ mm}$
Coplanarity Area of Termination $\leq 0,1 \text{ mm}$

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9001 to be observed.

Information: ohne Hilfsmittel lösbar <i>without tool unlockable</i>				Tolerances	 All Dimensions in mm	Scale 5:1	mit Verriegelung	
							<i>with locking mechanism</i>	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation 1.27 SRC P, 6-polig <i>1,27 SRC P, 6-pin</i>		
a		18.11.2009			www.ERNI.com	384804	I	
Index		Date					A3	