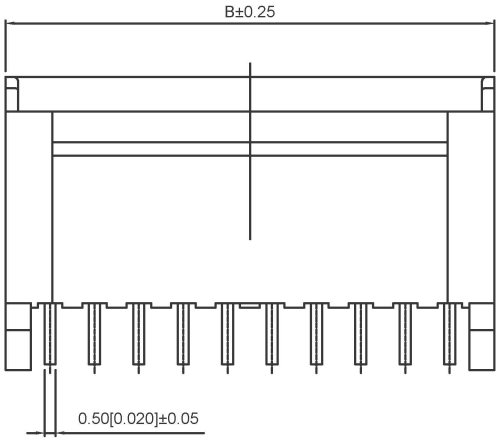

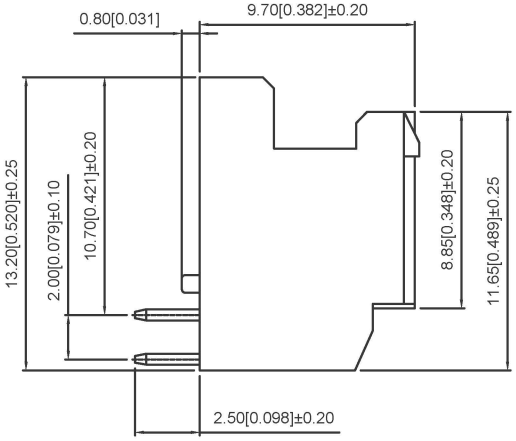

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤10mΩ
接触电阻：≤10mΩ
After environmental testing:≤20mΩ
环境测试后：≤20兆欧

X2015 W R-2xXX-N0SN
① ②③ ④ ⑤⑥

1.Series No.
2.Category:W-WAFER
3.Welding Board Angle:R-Right Angle 90°
4.Row No-Pin N0:2xXX-2x02P~2x20P
5.Material：N0-PA66 94V-0
6.Plating Category：SN-Bright Tin plating

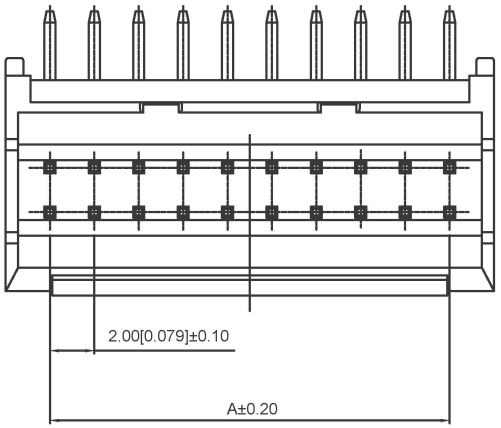

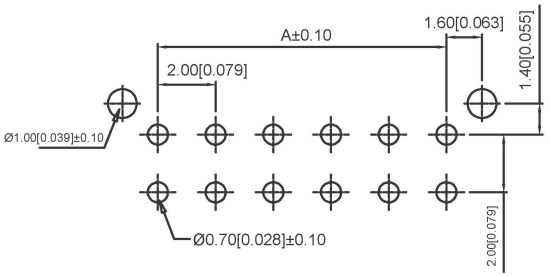

PCB LAYOUT

Poles	Dimensions(mm)		Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B		A	B
2x02	2.00	6.00	2x09	16.00	20.00	2x16	30.00	34.00
2x03	4.00	8.00	2x10	18.00	22.00	2x17	32.00	36.00
2x04	6.00	10.00	2x11	20.00	24.00	2x18	34.00	38.00
2x05	8.00	12.00	2x12	22.00	26.00	2x19	36.00	40.00
2x06	10.00	14.00	2x13	24.00	28.00	2x20	38.00	42.00
2x07	12.00	16.00	2x14	26.00	30.00			
2x08	14.00	18.00	2x15	28.00	32.00			

X2015WR-2xXX-N0SN	PA66 UL 94V-0	Brass	Tin-Plated	X2015H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

生效日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X2015WR-2xXX-N0SN
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0