


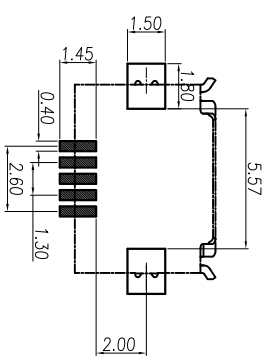




Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/10	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

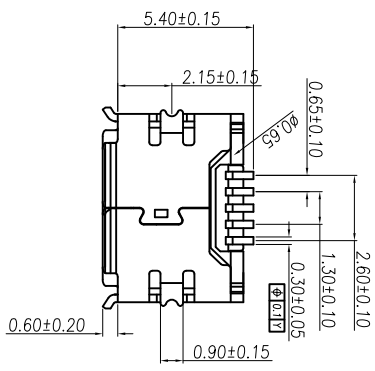

PACKAGED ON TAPE AND REEL

**SPECIFICATIONS:**

- Material: Insulator: Hi-Temp LCP, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: Stainless Steel, Nickel over plated
- Plating: Gold Flash over Nickel overall
- Electrical: Operating voltage: 30 VAC max. Current rating: 1 Amp max. Contact resistance: 30 mohms max. Insulation resistance: 100 Mohms min. @ 500 VDC Dielectric withstanding voltage: 100 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C o +85° C
- Environmental: Lead free, RoHS compliant. Recommended soldering temp: 260° C for 5 sec.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MICRO USB, TYPE B, SINGLE PORT  
 RIGHT ANGLE, SMT, TAPE AND REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLE
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	8/5/10
CHECKED	
APPROVED	

SIZE X	PART NO. MCR-B-S-RA-TSMT-NP-TR	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1

