



SHEET 1 OF 1

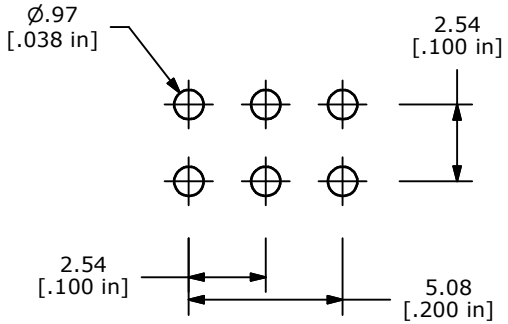


P.C. MOUNTING

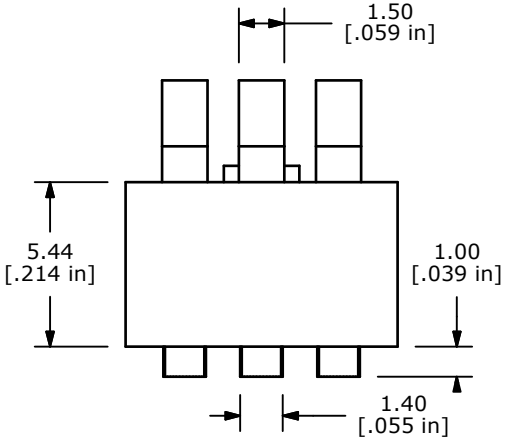


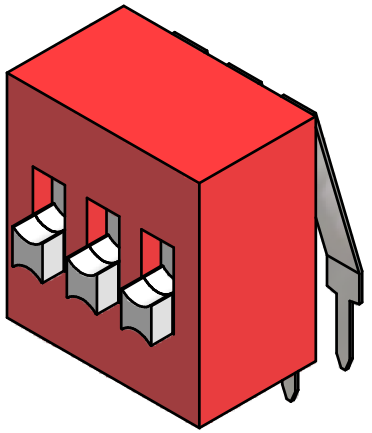



SCHEMATIC

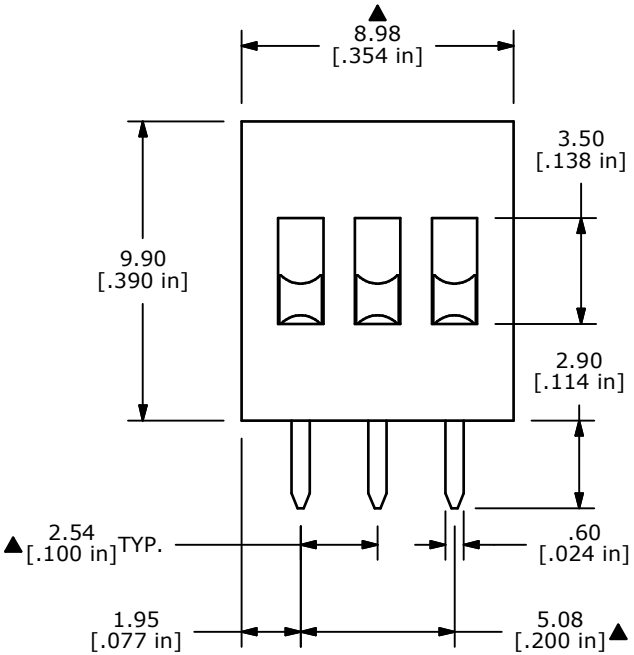

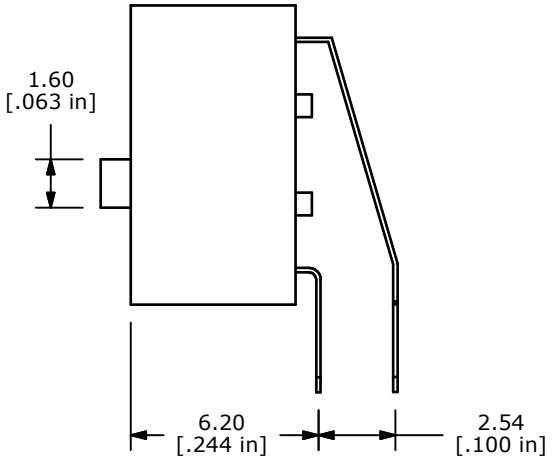

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: SILVER
5. RATING: SWITCH: 25mA @ 24VDC
   CARRY: 100mA @ 50VDC
6. ▲ OPERATING LIFE: 2,000 CYCLES, EACH CIRCUIT
7. INSULATION RESISTANCE: 100 MΩ min. @ 500VDC
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING FORCE: 1,000gf MAX.
10. OPERATING TEMP: -40°C to 85°C
11. CONTACT RESISTANCE:
    INITAL: 50m Ω TYP. @ 2-4VDC @ 100mA
    AFTERLIFE: 100m Ω TYP. @ 2.4 DC @ 100mA
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	17667	RELEASED FOR PRODUCTION	9/17/07	BF

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE KAS2103EUNMARKED

SCALE	DATE	DR	DWG	REV
4:1	9/17/2007	BF	N311052	A