



SAW Components

Data Sheet B 800





SAW Components

B 800

Satellite Receiver Filter

480,00 MHz

Data Sheet


Features

- IF filter for DSB receivers
- Constant group delay
- Optimized group delay time
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals

- Ni, Gold plated


Ceramic package **QCC8C**

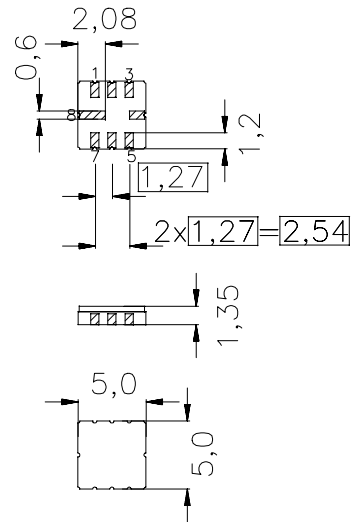

Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 2 Input
- 1 Input ground
- 6 Output
- 5 Output ground
- 3, 7 Ground
- 4, 8 Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B800	B39481-B800-U310	C61157-A7-A56	F61074-V8169-Z000

Electrostatic **Sensitive Device (ESD)**

Maximum ratings

Operable temperature range	T_A	-25/+85	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	0	V	between any terminals
AC voltages	V_{pp}	5	V	between any terminals


SAW Components
B 800
Satellite Receiver Filter
480,00 MHz
Data Sheet
Characteristics



Reference temperature:	$T_A = 25\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$
Terminating load impedance:	$Z_L = 50\ \Omega$
Group delay aperture	0,25MHz

		min.	typ.	max.	
Insertion attenuation	α				
Reference level for the following data	480,00 MHz	—	18,6	20,5	dB
Center frequency	f_c	479,00	480,00	481,00	MHz
Pass bandwidth					
$\alpha_{rel} \leq 3\text{ dB}$	B_{3dB}	—	27,0	—	MHz
$\alpha_{rel} \leq 10\text{ dB}$	B_{10dB}	—	34,3	—	MHz
Relative attenuation	α_{rel}				
	466,50 MHz	—	2,8	4,6	dB
	493,50 MHz	—	3,1	4,6	dB
Lower sidelobe	430,00 ... 455,50 MHz	38,0	48,0	—	dB
Upper sidelobe	504,50 ... 530,00 MHz	36,0	43,0	—	dB
Reflected wave signal suppression					
0,11 μs ... 2,0 μs after main pulse		39,0	42,0	—	dB
Amplitude ripple	$\Delta\alpha$				
473,50 ... 486,50 MHz		—	0,3	0,5	dB
Group Delay	τ				
480,00 MHz		—	250,0	—	ns
Group delay ripple (p-p)	$\Delta\tau$				
467,00 ... 493,00 MHz		—	11	18	ns
Impedance at 480,00 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	0,07 4,5	—	k Ω pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	0,60 3,1	—	k Ω pF
Temperature coefficient of frequency	TC_f	—	- 86	—	ppm/K



Data Sheet

Frequency response

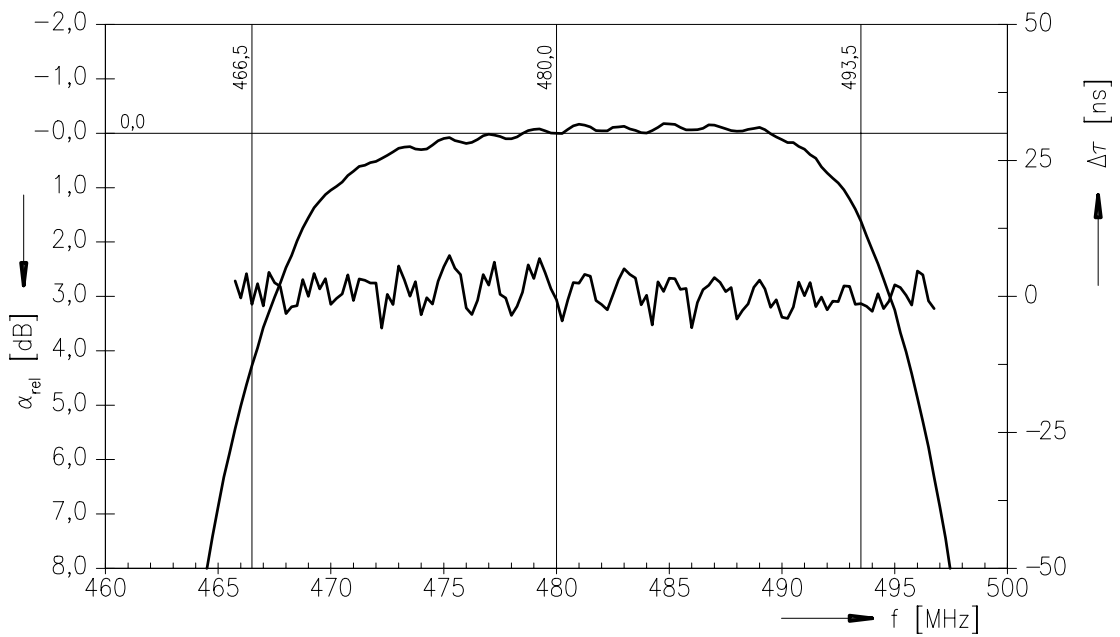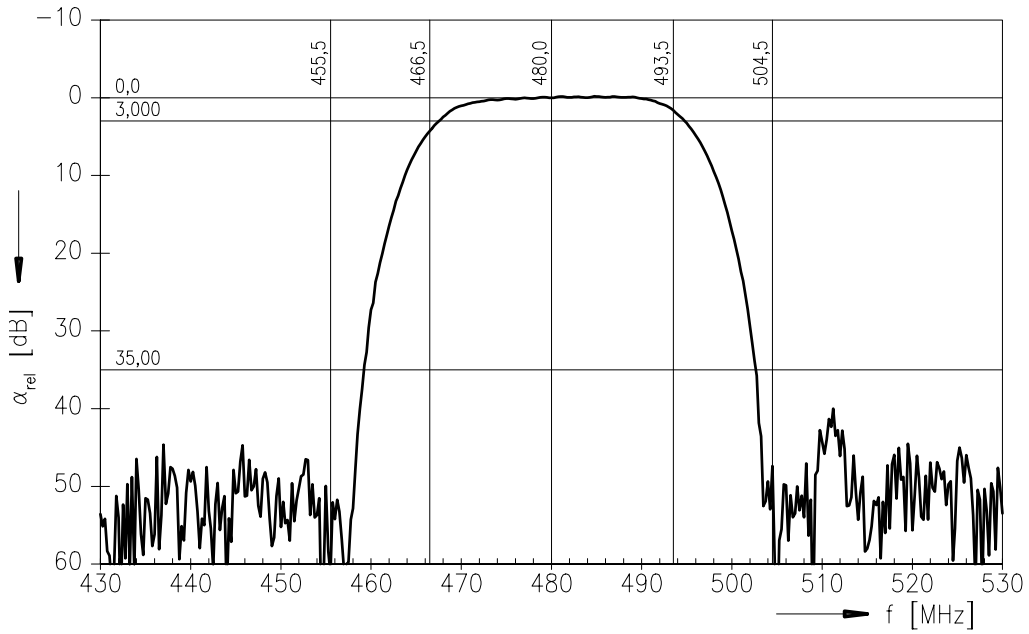



SAW Components


B 800

Satellite Receiver Filter


480,00 MHz

Data Sheet

Frequency response

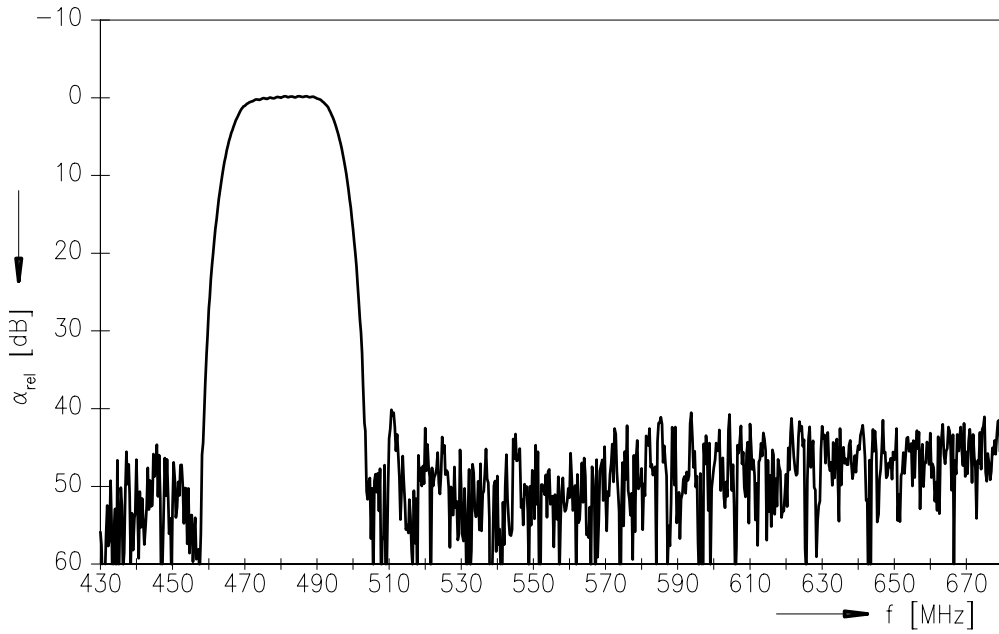

Time domain response

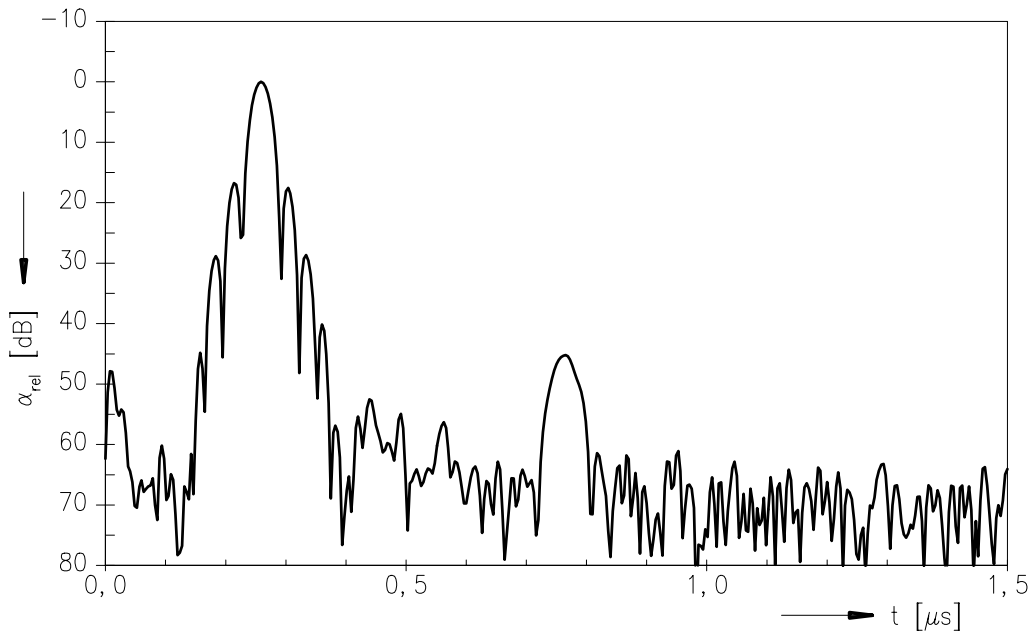



SAW Components

B 800

Satellite Receiver Filter

480,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.