
VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
01	DRAWN & RELEASED PER E940399 RCM		

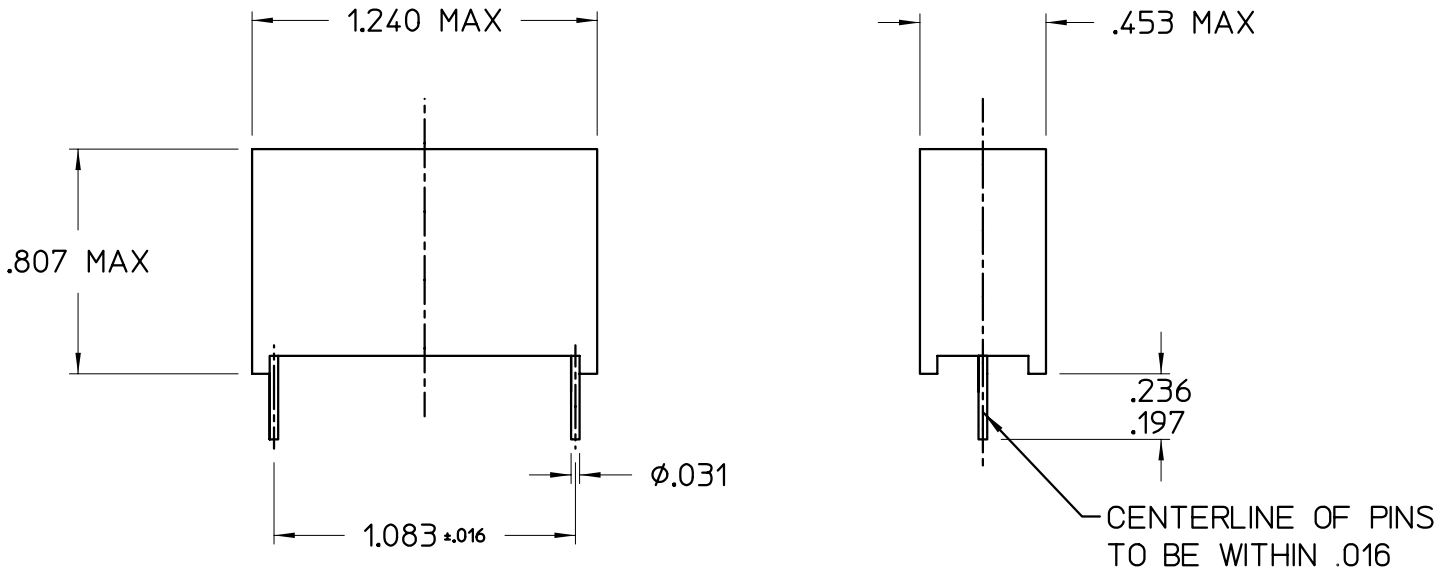

NOTES:
1. COATING: PLASTIC CAN: EPOXY RESIN SEALED, FLAME RETARDANT COATING
2. LEADS: RADIAL; TINNED COPPER WIRE
3. RATED VOLTAGE: 250VAC, 50/60 HZ
4. APPROVALS: VDE, SEV, DEMKO, SEMKO, NEMKO SETI, UL RECOGNIZED, IMQ, OVE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS ± 1/64 DECIMALS .XX ± .01 .XXX ± .005 ANGLES ± 1°

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN: RCM	6/22/94
CHECKED:	

VICOR

CAP, FILM, SUPPRESSION, .47uF, 20%, 250VAC

SIZE	FSCM NO.	DWG. NO.	REV.
B	67131	03047	01

SCALE 2X SHEET 1 OF 1