

PCI-ISA Bus Single Board Computer

HS-6252


800MHz Embedded CPU PCI-ISA Bus SBC
with VGA, Audio & Dual LAN

- ★ 133MHz FSB
- ★ CRT
- ★ Dual LAN
- ★ Audio
- ★ ATA/33/66/100
- ★ RS-232/422/485
- ★ 4 COM
- ★ PC/104
- ★ IrDA
- ★ USB
- ★ DOC
- ★ WDT
- ★ Single +5V
- ★ H/W Monitor

Single +5V!!

★ Ordering Guide

- **HS-6252**
800MHz Embedded CPU PCI-ISA Bus SBC with VGA, Audio & Dual LAN
- **HS-6252V**
800MHz Embedded CPU PCI-ISA Bus SBC with VGA
- **HS-6252LV**
800MHz Embedded CPU PCI-ISA Bus SBC with VGA & LAN

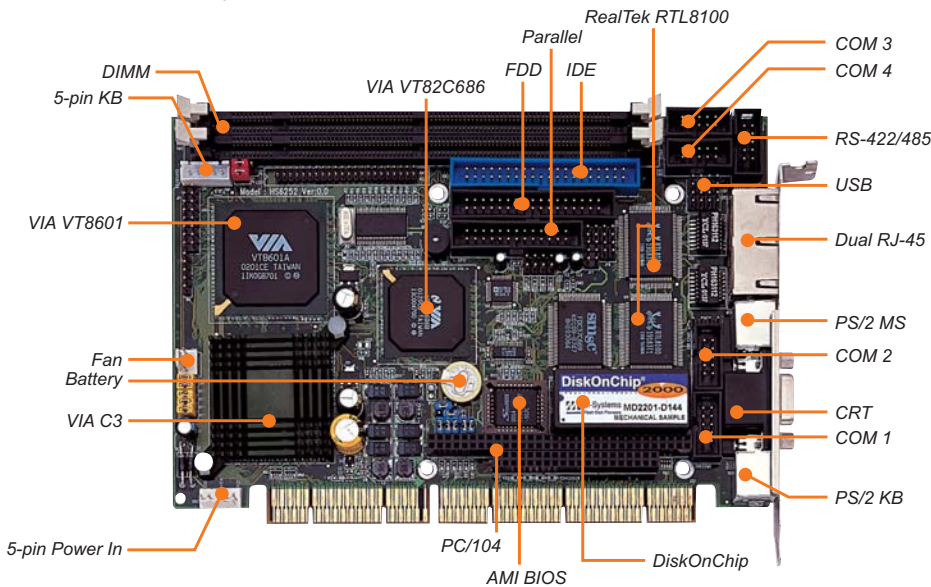

★ Features

- VIA C3 800MHz Embedded CPU
- Supports 66/100/133MHz FSB
- Two DIMM sockets with a max. capacity of 1GB
- VIA VT8601/VT82C686B system chipset
- SMC 37C669, VIA VT82C686B super I/O chipset
- VIA VT8601 CRT display controller
- Dual RealTek RTL8100 10/100 Based LAN
- AC97 3D audio controller
- Fast PCI ATA/33/66/100 IDE controller
- Four COM, four USB connectors
- PC/104 Bus connector
- DiskOnChip socket supporting memory sizes of up to 288MB
- Supports Single +5V power in
- Supports Hardware Monitor

★ Specifications

- * **CPU:** VIA C3 800MHz Embedded CPU
- * **Bus Interface:** PCI-ISA Bus
- * **Memory:** Two DIMM sockets with a max. capacity of 1GB
- * **Chipset:** VIA VT8601/VT82C686B
- * **I/O Chipset:** SMC 37C669, VIA VT82C686B
- * **VGA:** VIA VT8601 integrated Trident 3D supporting AGP Bus
- * **LAN:** Dual RealTek RTL8100 10/100 Based LAN
- * **Audio:** AC97 3D audio controller
- * **IDE:** Two IDE disk drives supporting ATA/33/66/100 and with transfer rates of 33/66/100MB/sec.
- * **FDD:** Supports up to two floppy disk drives
- * **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- * **Serial Port:** 16C550 UART-compatible RS-232/422/485 x 1 and RS-232 x 3 serial ports with 16-byte FIFO
- * **PC/104:** PC/104 connector for 16-bit ISA Bus
- * **IrDA:** One TX/RX IrDA header
- * **USB:** Four USB connectors
- * **Keyboard:** PS/2 6-pin Mini DIN or 5-pin connector
- * **Mouse:** PS/2 6-pin Mini DIN or 4-pin header
- * **DiskOnChip:** DiskOnChip socket supporting memory sizes of up to 288MB
- * **BIOS:** AMI PnP Flash BIOS
- * **Watchdog Timer:** Sets 1/2/10/20/110/220 seconds activity trigger with Reset or NMI
- * **CMOS:** Battery backup
- * **Operating Temperature:** 0~60°C
- * **Hardware Monitor:** VIA VT82C686B
- * **Dimensions:** 18.6 x 12.2 cm