

**Super-mini Signal Conditioners F2 Series****CURRENT LOOP SUPPLY**


(non-isolated)

**Functions & Features**

- Powers a 4 - 20 mA DC current loop
- Electrically isolating output signal from power input
- Shortcircuit protection
- Applicable to smart transmitters

**Typical Applications**

- Various 2-wire transmitters

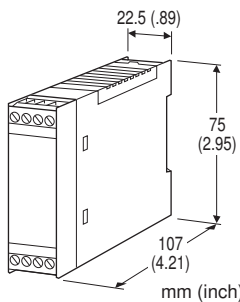**MODEL: F2D-24-R[1]****ORDERING INFORMATION**

- Code number: F2D-24-R[1]  
Specify a code from below for [1].  
(e.g. F2D-24-R/Q)
- Specify the specification for option code /Q  
(e.g. /C01)

**SUPPLY OUTPUT**

24: 24 V DC

**INPUT****Current**

4 - 20 mA DC (Input resistance 250 Ω)

**OUTPUT 1****Voltage**

1 - 5 V DC (Load resistance 250 kΩ min.)

**OUTPUT 2****Current**

4 - 20 mA DC

**POWER INPUT****DC Power**

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

**[1] OPTIONS****blank:** none**/Q:** With options (specify the specification)**SPECIFICATIONS OF OPTION: Q****COATING (For the detail, refer to M-System's web site.)****/C01:** Silicone coating**/C02:** Polyurethane coating**GENERAL SPECIFICATIONS****Construction:** Stand-alone; terminal access at the front**Connection:** Euro type connector terminal(applicable wire size: 0.2 to 2.5 mm<sup>2</sup>, stripped length 7 mm)**Housing material:** Flame-resistant resin (black)**Isolation:** Input or output to power**SUPPLY OUTPUT****Output voltage:** 24 - 28 V DC with no load**Current rating:** ≤ 22 mA DC

- Shortcircuit Protection

**Current limited:** 35 mA max.**Protected time duration:** No limit**INPUT SPECIFICATIONS**

- DC Current: Input resistor incorporated

**INSTALLATION****Current consumption**

- DC: Approx. 80 mA

**Operating temperature:** -5 to +55°C (23 to 131°F)**Operating humidity:** 30 to 90 %RH (non-condensing)**Mounting:** DIN rail**Weight:** 150 g (0.33 lb)**PERFORMANCE in percentage of span****Accuracy:** ±0.1 % (accuracy of the receiving resistor)**Temp. coefficient:** ±0.003 %/°C (±0.002 %/°F) (temp. coefficient of the receiving resistor)**Line voltage effect to supply output:** ±3 % over voltage range**Insulation resistance:** ≥ 100 MΩ with 500 V DC**Dielectric strength:** 2000 V AC @1 minute (input or output to power to ground)

## STANDARDS & APPROVALS

### EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive


EN 50581

### Approval:

UL/C-UL general safety requirements


(UL 3111-1, CAN/CSA-C22.2 No.1010-1)

## EXTERNAL DIMENSIONS unit: mm (inch)

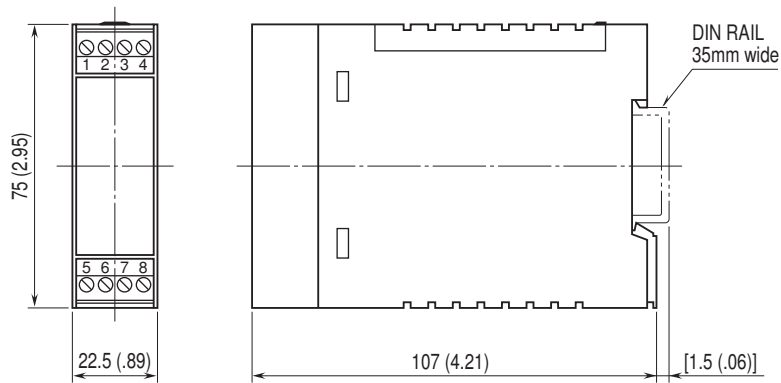


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm (inch)

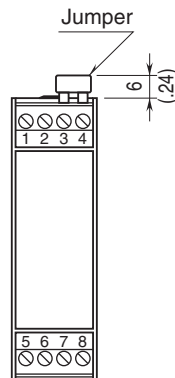

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

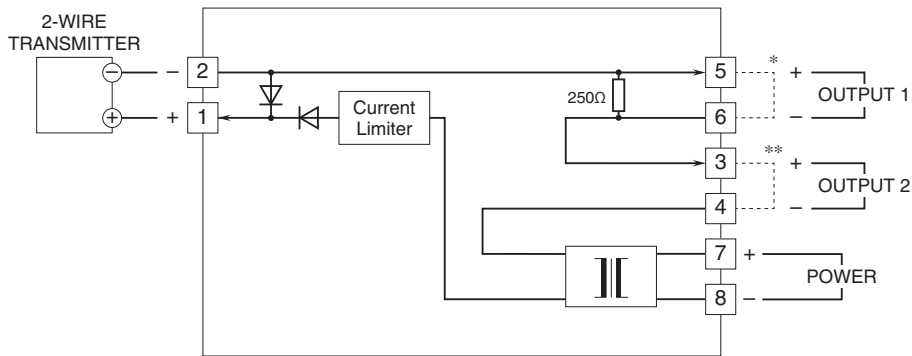

- \* Short across these terminals using the attached jumper (or leadwire) for large voltage allowance at Output 2. Be sure to match specifications of smart transmitter. Do not connect a capacitive load to Output 1.
- \*\*Be sure to short across these terminals using the attached jumper (or leadwire) when not using Output 2.



Specifications are subject to change without notice.