


HTC-15M, HTC-140M & HTC-150M

5 x 20mm Fuse Block & Covers

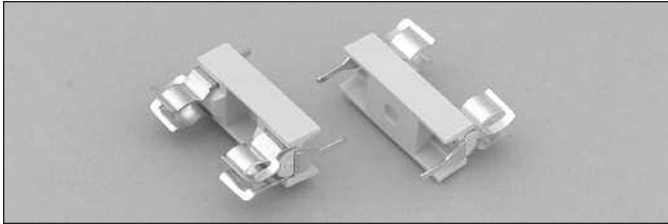

Block Description

- For 5 x 20mm fuses
- Tight cluster mounting
- Clips made of nickel-tin plated spring-bronze
- Available only in bulk of 100 and 1,000 pieces
- High temperature thermoplastic meets:
 - UL 94V0
 - Glow wire test: 960°C per IEC 695-2-1




Snap-On Cover Description

- HTC-140M (opaque cover) UL 94V0
- HTC-150M (transparent cover) UL 94V2

Dimensions - in (mm)

HTC-150M or HTC-140M Cover

Drawing Not to Scale

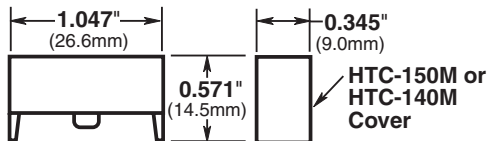

| Packaging Code | |
|----------------|--|
| Catalog No. | Catalog Number Prefix |
| HTC-15M | BK/ (100 pieces) or BK1/ (1000 pieces) |
| HTC-140M | BK/ (100 pieces) or BK1/ (1000 pieces) |
| HTC-150M | BK/ (100 pieces) |

Environmental Data

- Maximum suitable temperature: 110°C
- MSL Level 1 (conditions $\leq 30^\circ\text{C} / 85\% \text{RH}$)

Ordering

- Specify packaging and product catalog number

| Specifications | | | |
|----------------|-------------------|-------------------|-------|
| Catalog Number | Voltage Rating AC | Current Rating AC | Watts |
| HTC-15M | 250V | 6.3A | 1.6W |


Agency Information

- UL Recognized: IZLT2, E14853
- VDE Certificate: 40004439

Dimensions - in (mm)

HTC-15M Fuse Block Only


Drawing Not to Scale

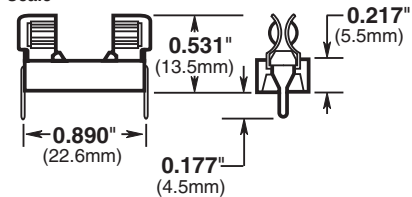

| Component | Material |
|-----------|---------------------------------|
| Clip | Spring-Bronze, Bright Tin Plate |
| Body | Thermoplastic |

Mounting Holes

Mounting Holes



This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.