
REV	DATE	ECO#
A	03/31/95	1342

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

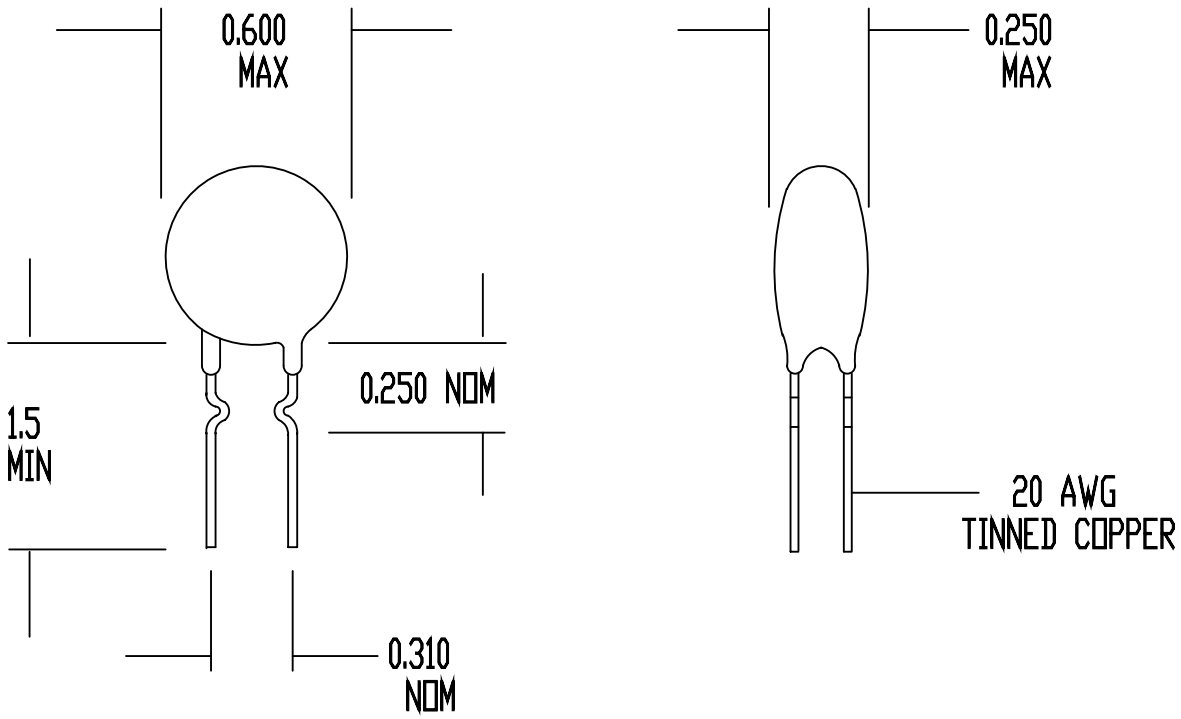

SPECIFICATIONS:
RESISTANCE AT 25 DEG C = 5 OHMS +/- 15%
MAX CONTINUOUS CURRENT (Imax) = 4 AMPS
RESISTANCE AT Imax = 0.15 OHMS NOMINAL
MAX VOLTAGE RATING = 265 VAC (RMS)
MAX SURGE RATING = 36 JOULES
ENCAPSULATION = SILICONE RESIN
MARKING = OPTIONAL
LEADS = RODAN P/N STL-209-42

DRAWN BY D. NGUYEN		AMETHERM Circuit Protection Thermistors
DATE 09/25/90	ORIG. F. TISEO	
REV A	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG310