

Chip Inductors - 0805CS (2012)



- Exceptional Q values, even at high frequencies
- Wirewound construction provides the highest SRFs in 0805 size
- Tight tolerances – 2% for most; 1% for some values

| Part number ¹ | Inductance ² (nH) | Percent tolerance ³ | Q min ⁴ | SRF typ ⁵ (MHz) | DCR max ⁶ (Ohms) | Irms ⁷ (mA) | Color code |
|--------------------------|---------------------------------|--------------------------------|--------------------|-------------------------------|--------------------------------|---------------------------|------------|
| 0805CS-020XJL_ | 2.8 @ 250 MHz | 5 | 80 @ 1500 MHz | 12200 | 0.06 | 800 | Gray |
| 0805CS-3N0XJL_ | 3.0 @ 250 MHz | 5 | 65 @ 1500 MHz | 12200 | 0.06 | 800 | White |
| 0805CS-030XJL_ | 3.3 @ 250 MHz | 5 | 50 @ 1500 MHz | 12200 | 0.08 | 600 | Black |
| 0805CS-050XJL_ | 5.6 @ 250 MHz | 5 | 65 @ 1000 MHz | 5900 | 0.08 | 600 | Orange |
| 0805CS-060XJL_ | 6.8 @ 250 MHz | 5 | 50 @ 1000 MHz | 5600 | 0.11 | 600 | Brown |
| 0805CS-070XJL_ | 7.5 @ 250 MHz | 5 | 50 @ 1000 MHz | 4800 | 0.14 | 600 | Green |
| 0805CS-080X_L_ | 8.2 @ 250 MHz | 5,2 | 50 @ 1000 MHz | 4400 | 0.12 | 600 | Red |
| 0805CS-100X_L_ | 10 @ 250 MHz | 5,2 | 60 @ 500 MHz | 4300 | 0.10 | 600 | Blue |
| 0805CS-120X_L_ | 12 @ 250 MHz | 5,2 | 50 @ 500 MHz | 4000 | 0.15 | 600 | Orange |
| 0805CS-150X_L_ | 15 @ 250 MHz | 5,2 | 50 @ 500 MHz | 3200 | 0.17 | 600 | Yellow |
| 0805CS-180X_L_ | 18 @ 250 MHz | 5,2 | 50 @ 500 MHz | 3100 | 0.20 | 600 | Green |
| 0805CS-220X_L_ | 22 @ 250 MHz | 5,2 | 55 @ 500 MHz | 2600 | 0.22 | 500 | Blue |
| 0805CS-240X_L_ | 24 @ 250 MHz | 5,2 | 50 @ 500 MHz | 2400 | 0.22 | 500 | Gray |
| 0805CS-270X_L_ | 27 @ 250 MHz | 5,2 | 55 @ 500 MHz | 2580 | 0.25 | 500 | Violet |
| 0805CS-330X_L_ | 33 @ 250 MHz | 5,2,1 | 60 @ 500 MHz | 2150 | 0.27 | 500 | Gray |
| 0805CS-360X_L_ | 36 @ 250 MHz | 5,2,1 | 55 @ 500 MHz | 1900 | 0.27 | 500 | Orange |
| 0805CS-390X_L_ | 39 @ 250 MHz | 5,2,1 | 60 @ 500 MHz | 2000 | 0.29 | 500 | White |
| 0805CS-430X_L_ | 43 @ 200 MHz | 5,2,1 | 60 @ 500 MHz | 1800 | 0.34 | 500 | Yellow |
| 0805CS-470X_L_ | 47 @ 200 MHz | 5,2,1 | 60 @ 500 MHz | 1700 | 0.31 | 500 | Black |
| 0805CS-560X_L_ | 56 @ 200 MHz | 5,2,1 | 60 @ 500 MHz | 1600 | 0.34 | 500 | Brown |
| 0805CS-680X_L_ | 68 @ 200 MHz | 5,2,1 | 60 @ 500 MHz | 1500 | 0.38 | 500 | Red |
| 0805CS-820X_L_ | 82 @ 150 MHz | 5,2,1 | 65 @ 500 MHz | 1330 | 0.42 | 400 | Orange |
| 0805CS-910X_L_ | 91 @ 150 MHz | 5,2,1 | 65 @ 500 MHz | 1330 | 0.48 | 400 | Black |
| 0805CS-101X_L_ | 100 @ 150 MHz | 5,2,1 | 65 @ 500 MHz | 1250 | 0.46 | 400 | Yellow |
| 0805CS-111X_L_ | 110 @ 150 MHz | 5,2 | 50 @ 250 MHz | 1100 | 0.48 | 400 | Brown |
| 0805CS-121X_L_ | 120 @ 150 MHz | 5,2,1 | 50 @ 250 MHz | 1100 | 0.51 | 400 | Green |
| 0805CS-151X_L_ | 150 @ 100 MHz | 5,2,1 | 50 @ 250 MHz | 920 | 0.56 | 400 | Blue |
| 0805CS-181X_L_ | 180 @ 100 MHz | 5,2,1 | 50 @ 250 MHz | 920 | 0.64 | 400 | Violet |
| 0805CS-221X_L_ | 220 @ 100 MHz | 5,2 | 50 @ 250 MHz | 820 | 0.70 | 400 | Gray |
| 0805CS-241X_L_ | 240 @ 100 MHz | 5,2 | 44 @ 250 MHz | 770 | 1.00 | 350 | Red |
| 0805CS-271X_L_ | 270 @ 100 MHz | 5,2 | 48 @ 250 MHz | 730 | 1.00 | 350 | White |
| 0805CS-331X_L_ | 330 @ 100 MHz | 5,2 | 48 @ 250 MHz | 650 | 1.40 | 310 | Black |
| 0805CS-391X_L_ | 390 @ 100 MHz | 5,2 | 48 @ 250 MHz | 600 | 1.50 | 290 | Brown |
| 0805CS-471X_L_ | 470 @ 50 MHz | 5,2 | 33 @ 100 MHz | 375 | 1.76 | 250 | Violet |
| 0805CS-561X_L_ | 560 @ 25 MHz | 5,2 | 23 @ 50 MHz | 330 | 1.90 | 230 | Orange |
| 0805CS-681X_L_ | 680 @ 25 MHz | 5,2 | 23 @ 50 MHz | 310 | 2.20 | 190 | Green |
| 0805CS-821X_L_ | 820 @ 25 MHz | 5,2 | 23 @ 50 MHz | 310 | 2.35 | 180 | Blue |

1. When ordering, specify **tolerance, termination and packaging** codes:

0805CS-821XGLC

Tolerance: F = 1% G = 2% J = 5%

(Table shows stock tolerances in bold.)

Termination: L = RoHS compliant silver-palladium-platinum-glass frit.

E = Halogen free component. RoHS compliant silver-palladium-platinum-glass frit terminations.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (7500 parts per full reel).

2. Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.

5. SRF measured using an Agilent/HP 8720D network analyzer and a Coilcraft SMD-D test fixture.

6. DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF858 test fixture.

7. Current that causes a 15°C temperature rise from 25°C ambient.

8. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 100-1 Revised 01/11/12


© Coilcraft Inc. 2013

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.


S-Parameter files
ON OUR WEB SITE
SPICE models
ON OUR WEB SITE

0805CS Series (2012)


Typical Q vs Frequency

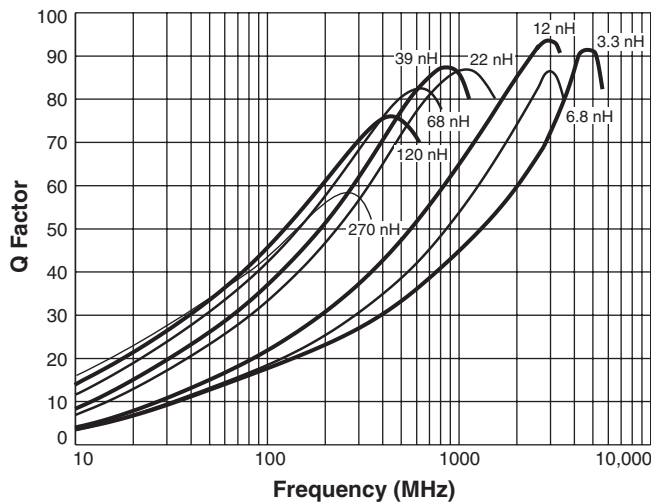

Typical L vs Frequency

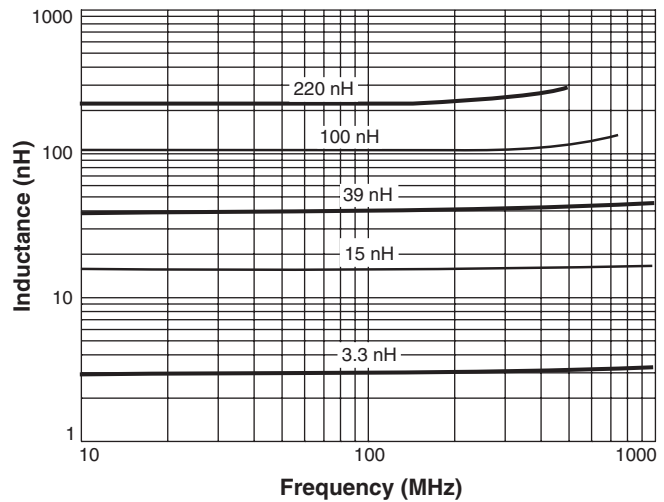

Irms Derating

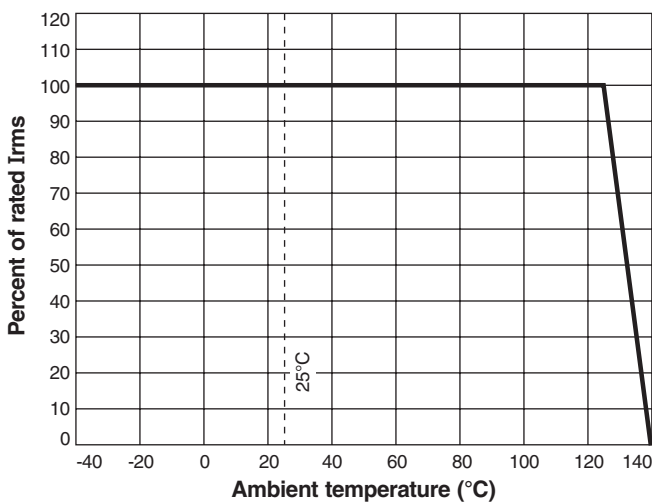

Designer's Kit C303 contains 10 of each 5% part
Designer's Kit C303-2 contains 10 of each 2% part

Core material Ceramic

Environmental RoHS compliant, halogen free optional

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 10.2 – 11.6 mg

Ambient temperature -40°C to +125°C with Irms current, +125°C to +140°C with derated current

Storage temperature Component: -40°C to +140°C.
Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +100 to +250 ppm/°C


Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

One per billion hours / one billion hours, calculated per Telcordia SR-332

Packaging 2000/7" reel; 7500/13" reel. Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.65 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

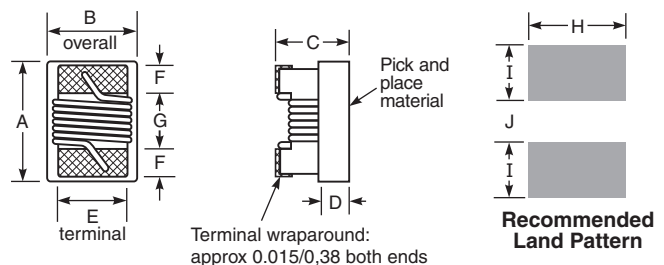

| A | B | C | D | E | F | G | H | I | J |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| max | max | max | ref | | | | | | |
| 0.090 | 0.068 | 0.060 | 0.020 | 0.050 | 0.020 | 0.040 | 0.070 | 0.040 | 0.030 |
| 2,29 | 1,73 | 1,52 | 0,51 | 1,27 | 0,51 | 1,02 | 1,78 | 1,02 | 0,76 |

Note: Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.

COILCRAFT ACCURATE REPEATABLE MEASUREMENTS
PRECISION TEST FIXTURES
SEE WEB SITE



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 100-2 Revised 01/11/12

© Coilcraft Inc. 2013
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.