
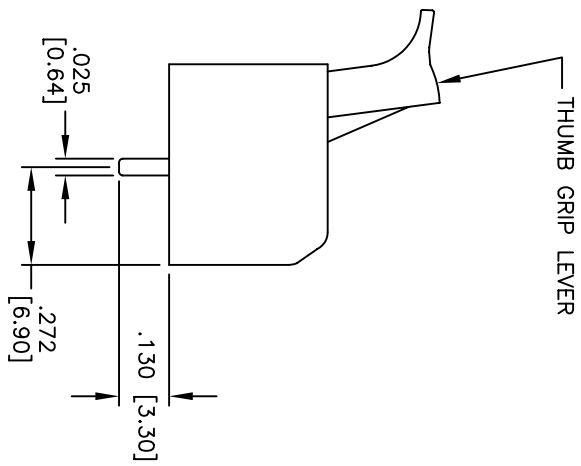
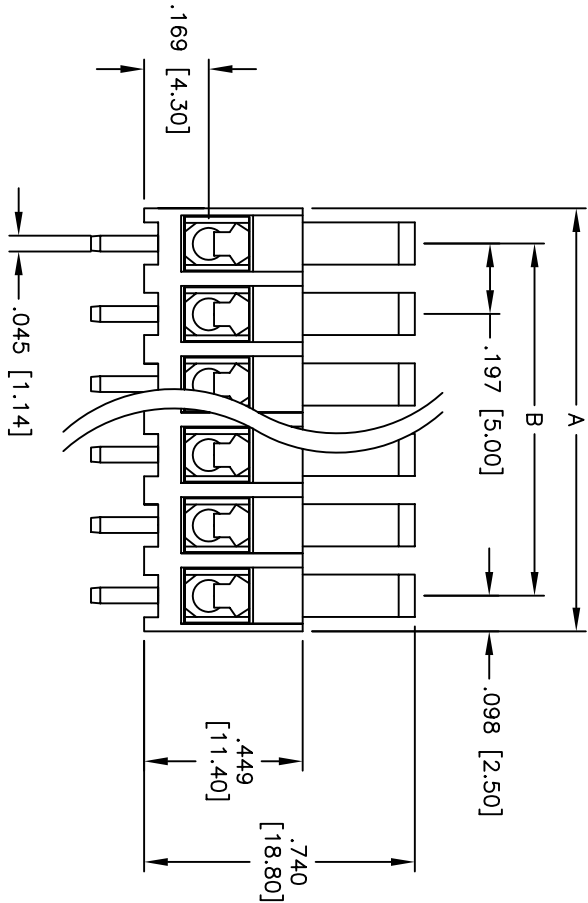


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/18/05	

APPROVED: _____
 DATE: _____ TITLE: _____

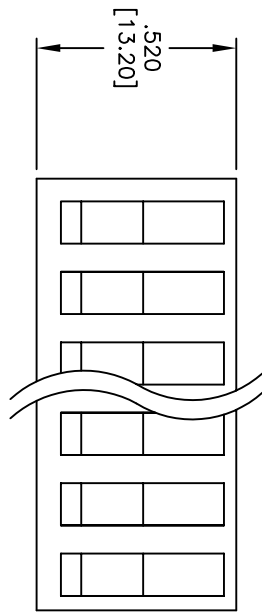

A = .197 [5.00] x No. of Poles
 B = .197 [5.00] x (No. of Poles - 1)

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL94V-0
 Insulator color: Green
 Metal cage: Brass, Tin plated
 Electrical: Operating voltage: 300 VAC max.
 Current rating: 10 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Mechanical: Wire range: 18 to 22 AWG Stranded
 Temperature Rating: Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	1/18/05
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		.197 [5.00] CENTERLINE LEVER BLOCK	
SIZE	PART NO.	TSE-XX-C	REV.
X			-
REF:	SCALE:	NTS	SHEET 1 OF 1