PM Series

Standard Size Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

O

SPECIFICATIONS

Contact rating: 6 Amps at 125 VAC, 3 Amps at 250 VAC
Initial contact resistance: 30 milliohms max.
Insulation resistance: 100 megohms min. at 500 VDC
Dielectric strength: 1000 VAC for 1 minute (min.)
Electrical life: 10,000 cycles min.
Operating temperature range: -20°C to +60°C
Actuation force: 500g ± 200g
Solder heat resistance: 260°C max. for 3 seconds
Solvent washing permissible


FEATURES

- **Wash-through open frame construction.**
- **UL & CSA recognized.**
- **Threaded mounting holes standard - M3X0.5.**
- **Panel mounting.**


MATERIALS

Contacts: Silver plated phosphor bronze
Terminals: Tin plated brass
Actuator: Nylon, type 6/6
Base: Phenolic laminated sheet
Frame: Zinc plated steel

MODEL NO.
PM13B012



1P2T

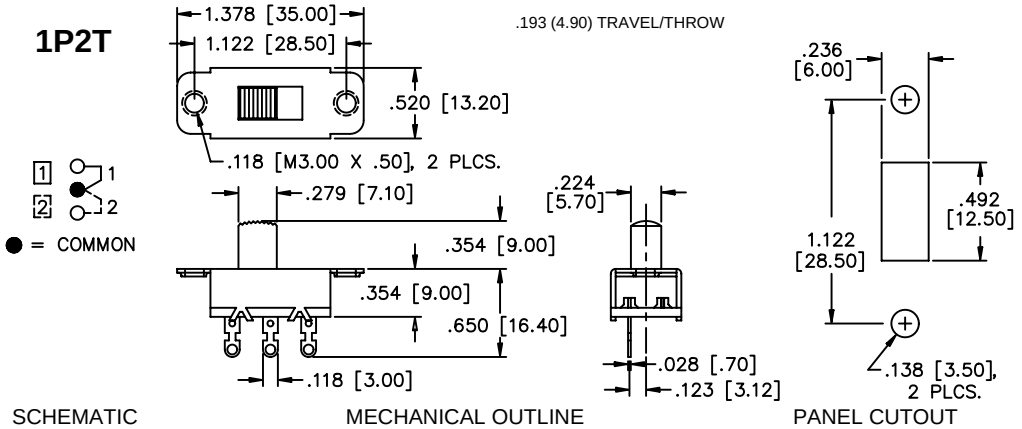


SCHEMATIC | MECHANICAL OUTLINE | PANEL CUTOUT

MODEL NO.
PM13B022



2P2T

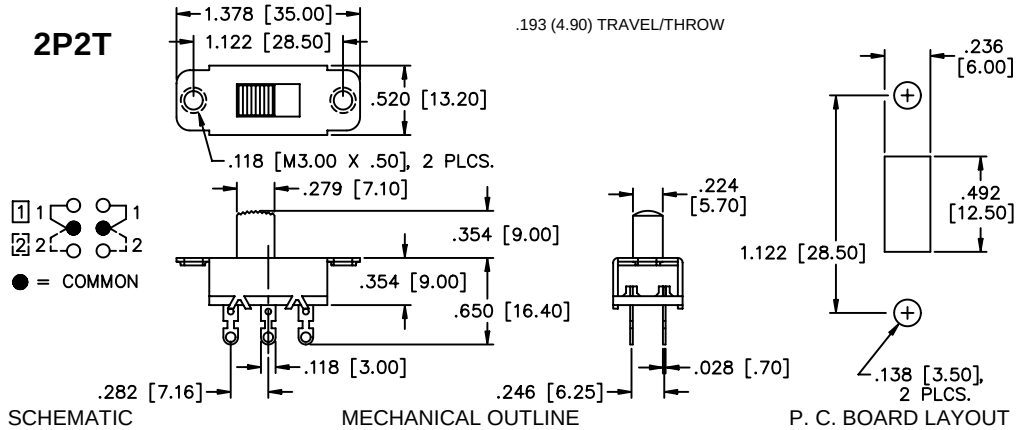


SCHEMATIC | MECHANICAL OUTLINE | P. C. BOARD LAYOUT

MODEL NO.
PM13B022P



2P2T

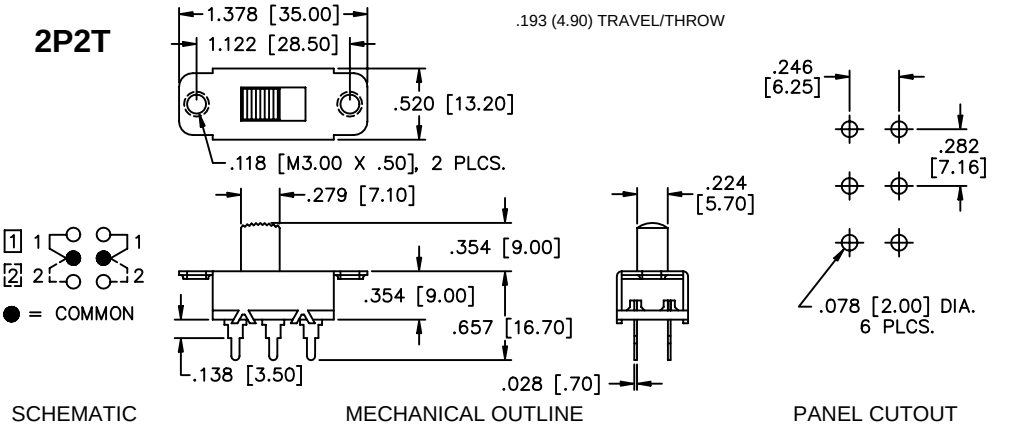

SCHEMATIC | MECHANICAL OUTLINE | PANEL CUTOUT