


- Complies with CCITT G.961
- Remote Power Feeding to NT
- Operating Temperature : -25°C to +85°C


Electrical Parameters @ 25° C

Inductance (mH $\pm$ 10%)	Leakage Inductance (μ H Typ.)	Interwinding Capacitance (pF Typ.)	Hipot (kVac)	Idc (mA)	Turns Ratio	DCR (Ω Max.)	
13.3	45	70	2.5	60	1.6:1.6:1:1	5.0 (I.C.)	5.0 (Line)

Package

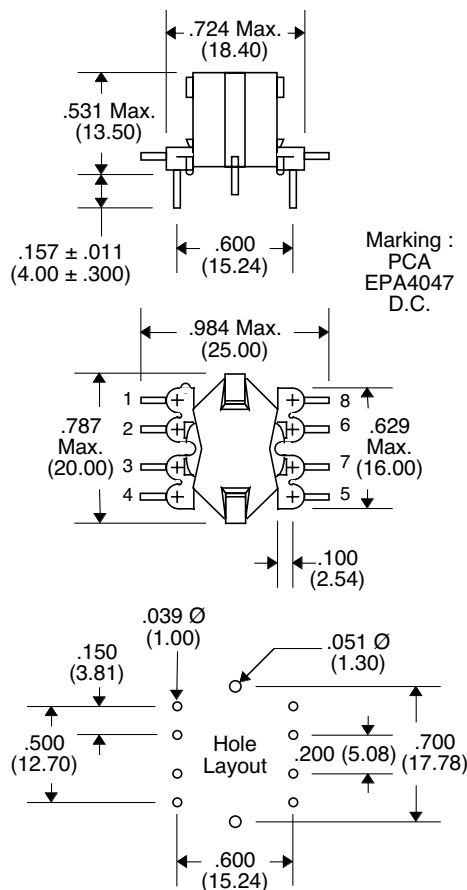

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm $\pm$.010 / .25