


67 ME 020-508

Pluggable terminal blocks on pin headers, pitch 5.08 mm




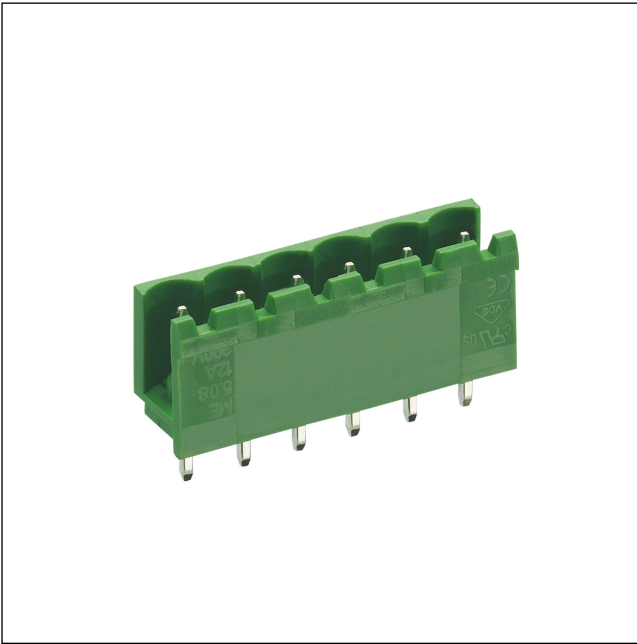


Pin header, without sidewalls, upright version, stringable without loss of pitch

Approvals:



67 ME 020-508



*a printed circuit board layout

Environmental conditions

Temperature range -40 °C/+105 °C

Materials

Insulating body PA, V-0 according to UL94
Contact pin CuZn, tin-plated

Electrical data (at T_{amb} 20 °C)

Rated current 4 A (T_U 60 °C)
2 A (T_U 100 °C)
Rated voltage 250 V AC
Rated impulse voltage ≥ 2 kV
Insulation resistance > 5 GΩ

Associated products

Counterparts
 ☞ 6770 ☞ MC 100-508 ☞ MC 200-508
 ☞ MC 310-508

67

ME 020-508

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions A (mm)
ME 020-508 02	2	500	1000	10.16
ME 020-508 03	3	500	1000	15.24
ME 020-508 04	4	500	1000	20.32
ME 020-508 06	6	300	1000	30.48
ME 020-508 08	8	200	1000	40.64

Packaging:

in bulk, in a plastic bag