


SHEET OF

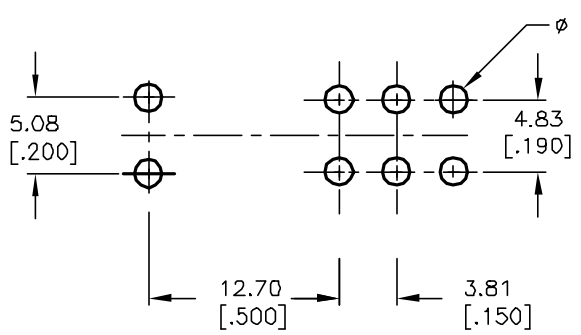


RECOMMENDED P.C.B. LAYOUT

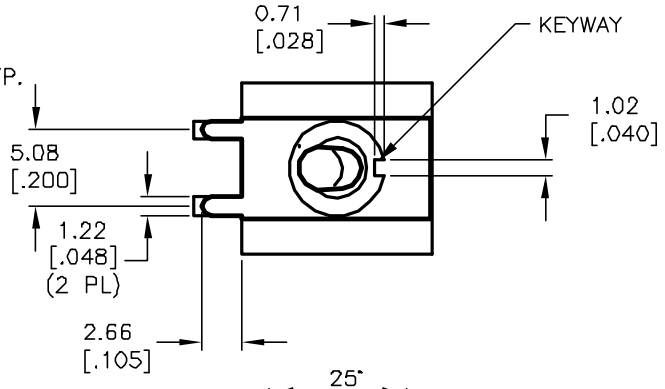

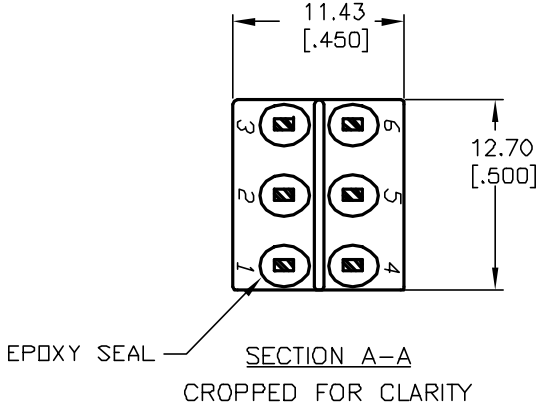


SECTION A–A
CROPPED FOR CLARITY




CIRCUIT: DPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3,5-6	OPEN	2-1,5-4

( )=MOMENTARY

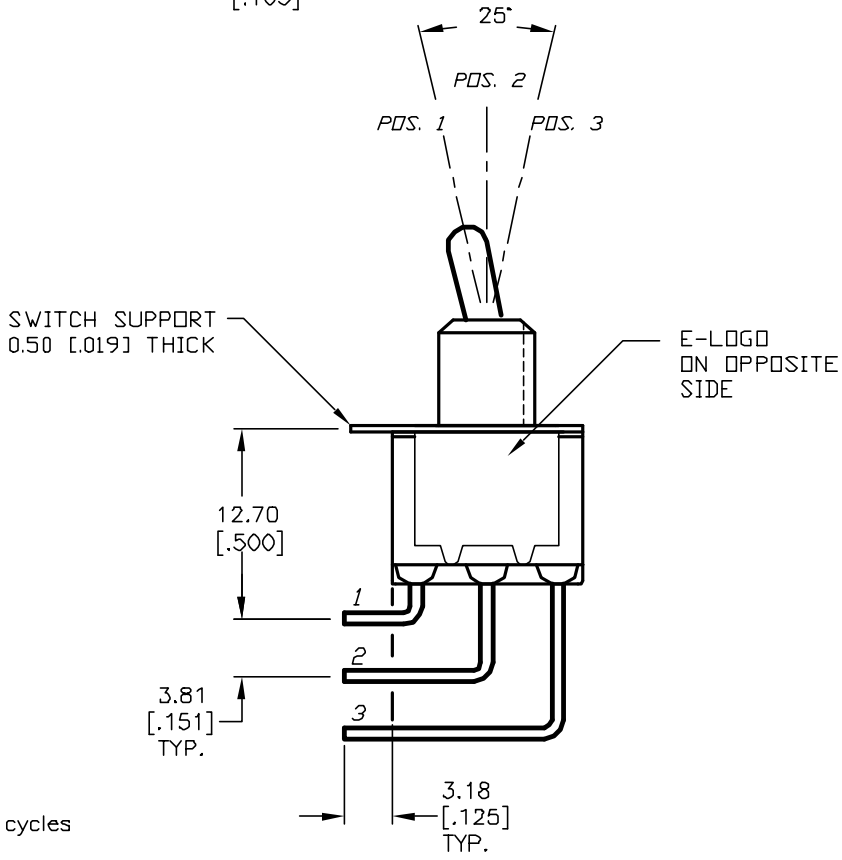

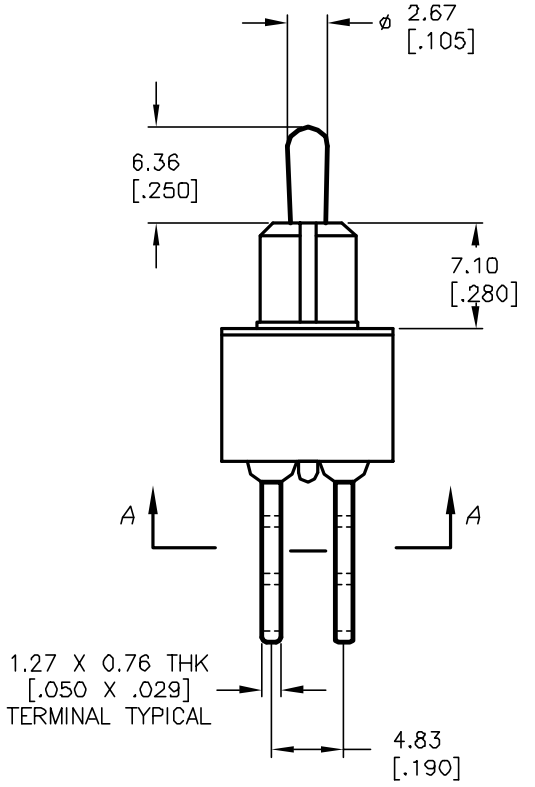

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
   2A @250VAC.
5. FIXED TERM. & MOVING CONTACT:
   Copper Alloy W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
   at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12087	RELEASED FOR PRODUCTION	4/25/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 100 DP-2 T2 B4 M7 Q E

SCALE	DATE	DR	DWG	REV
2:1	3/20/02	CJB	T122012	A