

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio ($\pm 5\%$)

1:2CT & 1:1.36

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.5 & 0.8	μ H
Capacitance ($C_{w/w}$)		35	pF
Primary DC Resistance		0.8	ohms
Secondary DC Resistance		1.8	ohms
ET Product	10		V μ S

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 21 pieces per tube


Tape and Reel available

Primary Pins 14-12 & 5-7

PHYSICAL DIMENSIONS All dimensions in inches (mm):

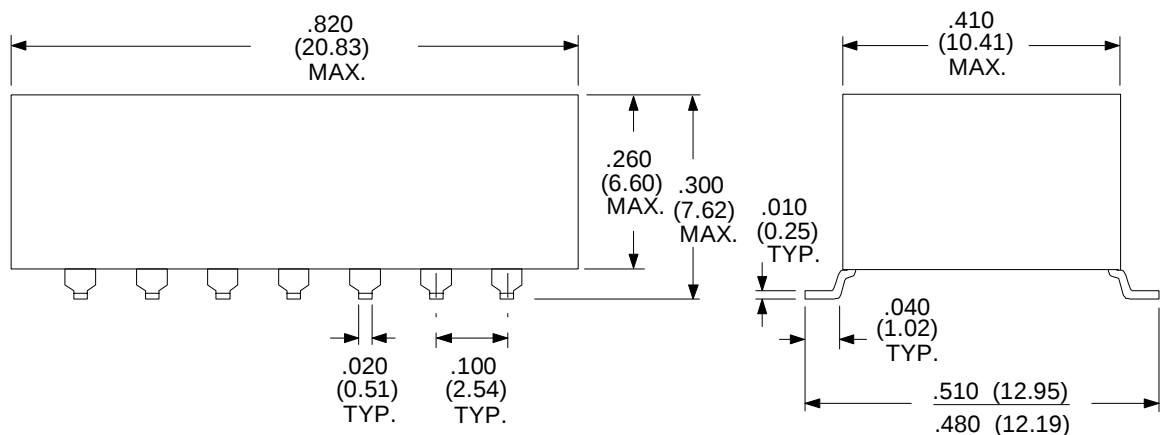

SCHEMATIC DIAGRAM:

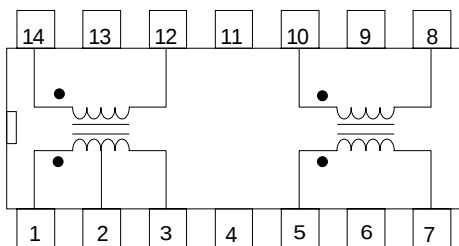

RHOMBUS P/N: **T-11049**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: **1 OF 1**