




Features

- Rated voltage 275Vac (UL, CSA 250V).
- IEC/EN 60384-14 class X2.


Applications

- Designed mainly for suppressing noise occurring in power line of electrical appliances.


Dimensions

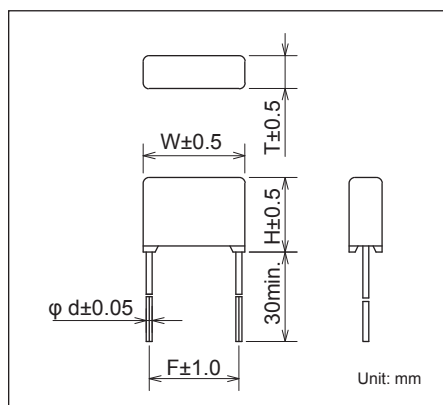


Safety Standard	File No.
UL	:UL-60384-14 E47474
cUL	:CSA E60384-14 E47474
CSA	:CSA E60384-14, C22.2 No.8 LR37404, LR104926
VDE	:IEC/EN 60384-14 40018318, 40017808
SEMKO	:IEC/EN 60384-14 917611, 1111621
NEMKO	:IEC/EN 60384-14 P08209479, P06206040
DEMKO	:IEC/EN 60384-14 315316-01, D-00242
FIMKO	:IEC/EN 60384-14 FI25733, FI27268
Electrosuisse	:IEC/EN 60384-14 12.0939, 12.0937

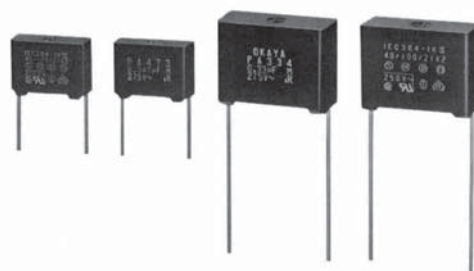

Circuit



Model numbering system

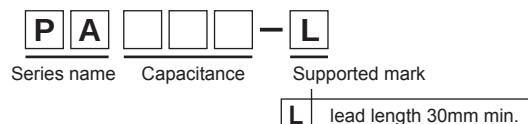

Electrical Specifications

Rated Voltage **275Vac (UL, CSA: 250V)**

Safety Standard	Class	Model Number	Capacitance μF±20%	Dimensions					Dissipation Factor	Test Voltage	Insulation Resistance
				W	H	T	F	d			
       	X2	PA103-L	0.01	17.0	12.0	5.0	15.0	0.6	0.01max. (at 1kHz)	Line to Line 1,250Vac 50/60Hz 60sec	Line to Line 103~334 15,000MΩmin. 474~225 5,000Ω•Fmin
		PA123-L	0.012								
		PA153-L	0.015								
		PA183-L	0.018								
		PA223-L	0.022								
		PA273-L	0.027								
		PA333-L	0.033		12.5	5.5	22.5	0.8			
		PA393-L	0.039								
		PA473-L	0.047								
		PA563-L	0.056								
		PA683-L	0.068								
		PA823-L	0.082								
		PA104-L	0.1	25.0	16.0	6.5	27.5			1.0	
		PA124-L	0.12								
		PA154-L	0.15								
		PA184-L	0.18								
		PA224-L	0.22								
		PA274-L	0.27								
		PA334-L	0.33	30.0	17.0	8.5	37.5				
		PA394-L	0.39								
		PA474-L	0.47								
		PA564-L	0.56								
		PA684-L	0.68								
		PA824-L	0.82								
		PA105-L	1.0	30.5	28.0	16.0	37.5				
PA125-L	1.2										
PA155-L	1.5										
PA185-L	1.8										
PA225-L	2.2										
PA275-L	2.7										
PA335-L	3.3	41.0	32.5	17.5	37.5						
PA395-L	3.9										
PA475-L	4.7										
PA565-L	5.6										
PA685-L	6.8										
PA825-L	8.2										

Operating Temperature: -40~+100°C