

Nut Torque: 5 ~ 14Nm

Operating Pressure: 400gf ± 200gf

Operating Stroke: 1.8mm ± 0.5

Protection Grade: IP65, IK08

Function: (ON)-OFF

Contact: Silver Alloy

Base: PA66

Shell: Brass, Ni Plating

Button: SUS

Rating (Resistive load): 3A 250V AC

Contact Resistance: 50mΩ MAX.

Insulation Resistance: 100MΩ MIN.

Dielectric Strength: 1500V AC 1 minute

Electrical life: 50,000 cycles


Mechanical life: 200,000 cycles

Operating Temperature: -20°C ~ 80°C

Relative Air Humidity: 45% ~ 85%

Safety Approval:

SWITCHING CIRCUIT

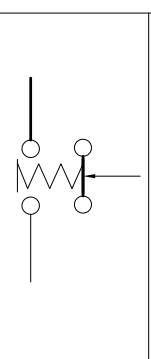

公差 TOLERANCES	.X± 0.5 .XX± 0.3	角度 ANGLE	±1°	单位	DIMENSION UNIT	mm.
---------------	------------------	----------	-----	----	----------------	-----

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECON NO.	核准 APPROVED BY	核对 CHECKED BY	日期 DATE	品名 TITLE	图号 DRAWING NO
						2021.04.27	PBM-16M11-HS-N-NN-B8L-A3	PBM-16M11-HS-N-NN-B8L-A3_A0