


DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

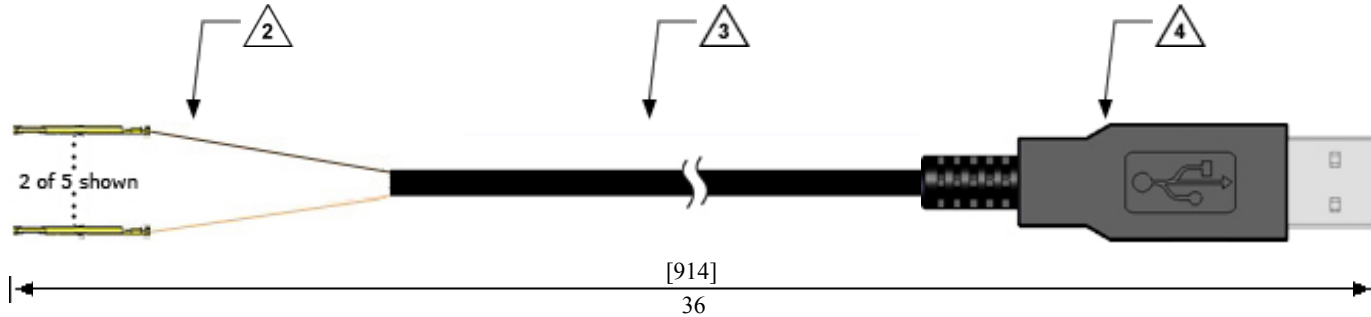

PATCHCORD
designer

5. Maximum Operating Current = 1.5 Amps



USB 2.0 TYPE A PLUG



USB 2.0 WIRE - 2.5" WIRE BREAKOUT



610138216 - SIGNAL, RECEIVER, QUADRAPADDLE, 5 AMP, 22-28 AWG

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS MANUAL @ WWW.VPC.COM

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

CUSTOMER DRAWING		
VIRGINIA PANEL CORPORATION WWW.VPC.COM		
Signal Patchcord, Receiver, QuadraPaddle, 36", USB 2.0 Wire, to USB Type A Plug, (1.5 Amps)		
SIZE A	CAGE CODE 18117	PART# 7-124872596-036
SCALE: NONE	DATE: 01/01/2018	SHEET 1 OF 1