
This document was generated on 01/20/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0765609107
Status: Active
Overview: Impact™ Backplane Connector and Cable Assembly System
Description: Impact™ 100 Ohm 6 Pair RAM Right Angle Header, Right Guided, Left Endwall, 10 Columns, 180 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead-Free

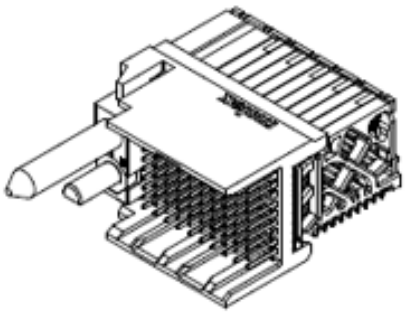

Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-76060-999-001 (PDF)
Application Specification AS-76060-990-001 (PDF)
Application Specification AS-76060-9999-001 (PDF)
Packaging Specification PK-70873-777 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76560
Application	Coplanar
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Electrical Model	Yes
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	887191309767
Physical	
Circuits (Loaded)	180
Circuits (maximum)	180
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	31.990/g
Number of Columns	10
Number of Pairs	6
Number of Rows	18
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant

REACH SVHC
Not Contained Per - ED/21/2016 (20 June 2016)

Halogen-Free Status
Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the Contact Us section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
76560 Series

Mates With
76150 Impact™ 100 Ohm Daughtercard

Electrical	
Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-76060-990-001, AS-76060-9999-001
Electrical Model Document	EE-76560-0001
Packaging Specification	PK-70873-777
Product Specification	PS-76060-999-001
S-Parameter Model	SP-76560-0001, SP-76560-002
Sales Drawing	SD-76560-9004
Symbol/Footprint Data	SYM-76560-9107

This document was generated on 01/20/2017
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION