

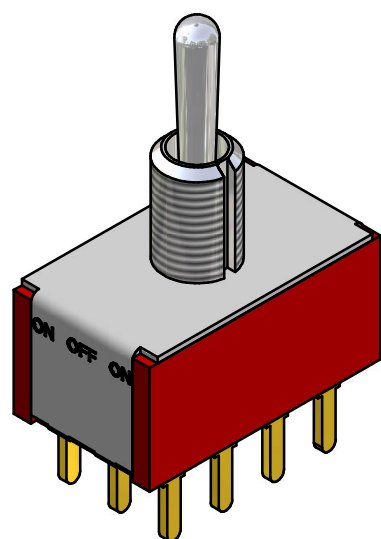


▲



| SWITCH FUNCTION         |        |                         |
|-------------------------|--------|-------------------------|
| POS. 1                  | POS. 2 | POS. 3                  |
|                         |        |                         |
| ON                      | OFF    | ON                      |
| 2-3, 5-6,<br>8-9, 11-12 | OPEN   | 2-1, 5-4,<br>8-7, 11-10 |

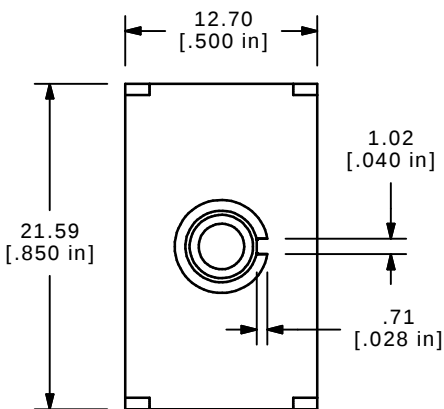

ISOMETRIC

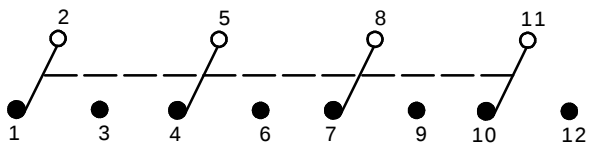

CIRCUIT: 4PDT

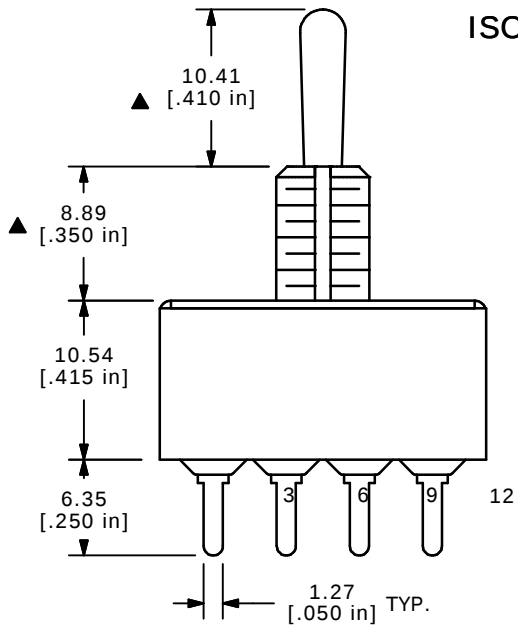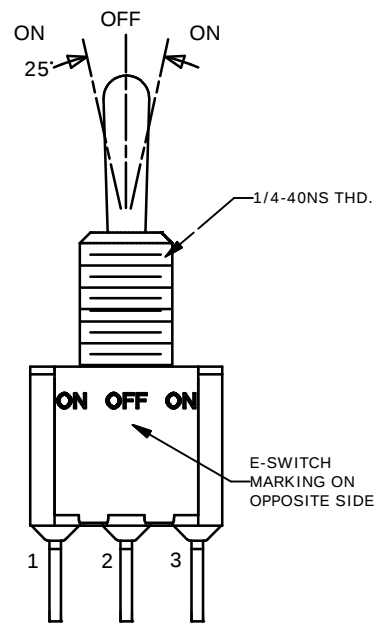

- NOTE:
- 1. ALL DIMENSIONS IN MM [INCH]
  - 2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - 3. TERMINAL NUMBERS FOR REF ONLY
  - ▲ 4. PLATING MATERIAL: GOLD
  - 5. RATING: 0.4 (VA) Max. @20V Max.
  - 6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
  - 7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
  - 8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  - 9. OPERATING TEMP.: -30°C to 85°C
  - 10. ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

|     |        |                         |        |    |
|-----|--------|-------------------------|--------|----|
| A   | 13981  | RELEASED FOR PRODUCTION | 5/7/04 | AR |
| REV | PCR NO | DESCRIPTION             | DATE   | BY |

|                      |             |       |             |       |
|----------------------|-------------|-------|-------------|-------|
| TITLE 1004P3T1B1M2RE |             |       |             |       |
| SCALE 2:1            | DATE 5/7/04 | DR AR | DWG T143003 | REV A |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED