


## NX5032GC

For OA / AV

### ■ Features

A low-height surface-mount type crystal unit, suitable for OA (office automation) and AV (audiovisual) applications.

- Compact and thin. (5.0 × 3.2 × 1.0mm typ.)
- Excellent electrical performance ideal for OA and AV applications.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- Supports low height mounting and ideal for notebook computers.
- Glass-sealed product with the same terminal shape (4 terminals) as NX5032SA.

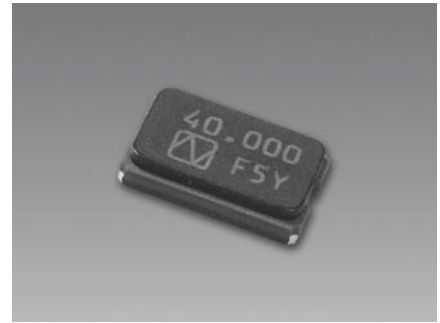

RoHS Compliant  
Directive 2002/95/EC

### ■ Specifications

Item	Model	NX5032GC
Frequency Range		12 to 50MHz
Overtone Order		Fundamental
Frequency Tolerance (25 ±3°C)		±15 × 10 <sup>-6</sup>
Temperature Characteristics (with reference to +25°C)		±15 × 10 <sup>-6</sup>
Operating Temperature Range		-10 to +75°C
Equivalent Series Resistance		Refer to *1
Drive Level		50μW(Max:500μW)
Load Capacitance		8pF

The above specifications are standard for this NDK product.

Custom-made specifications such as load capacitance and temperature characteristics are also available.

Please contact NDK sales with your enquiries.


### ■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following :

Model name - Frequency (Max : 9 digits) M - Number for specifying an order Example NX5032GC-20.000M-STD-CSK-6

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).

### ■ Dimensions

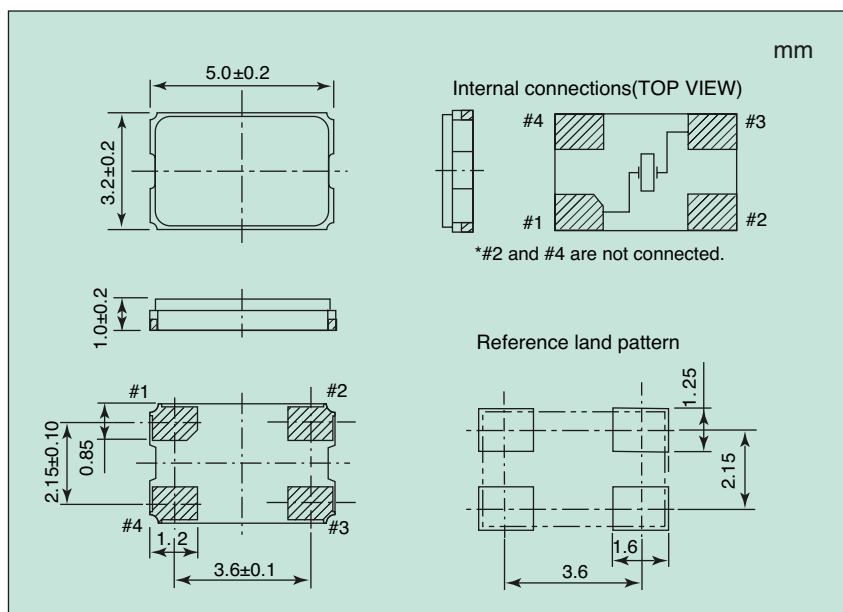

\*1 Equivalent Series Resistance

Frequency (MHz) (Range)	Equivalent Series Resistance max.[Ω]
12 to 20	120
20 to 30	70
30 to 50	50