


1. Mechanical Dimensions:



2. Schematic:

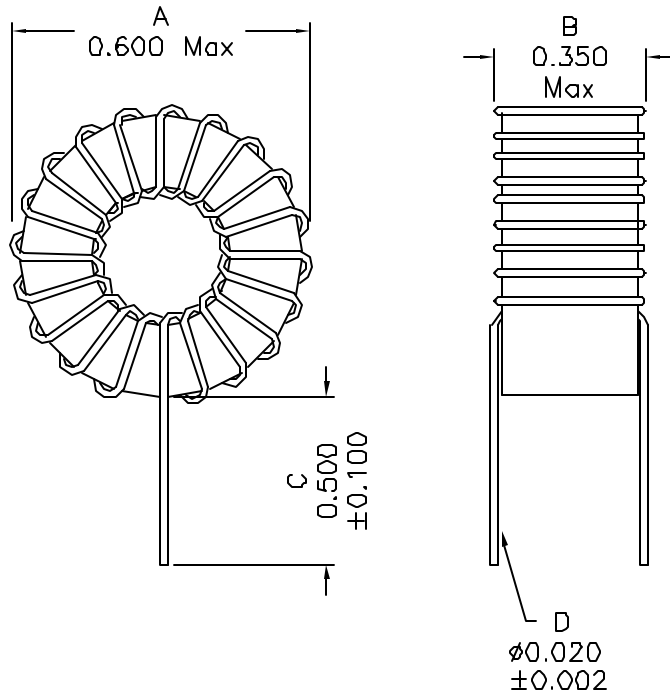

3. Electrical Specifications: @25°C

OCL: 140uH±15% @10KHz 0.1V 0Adc
 100uH Typ @10KHz 0.1V 1.5Adc
 DC Res: 0.100 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202C, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. Strip and tin leads to mounting plane.

DOC. REV: 00/4

XFMRs Inc	Title: TOROIDAL INDUCTOR								
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	<table border="1"> <tr> <td>P/N: XF1006-VO</td> <td>REV. 00</td> </tr> <tr> <td>DWN. 廖玉坤</td> <td>Dec-19-06</td> </tr> <tr> <td>CHK. 李清儿</td> <td>Dec-19-06</td> </tr> <tr> <td>APP. Joe Huff</td> <td>Dec-19-06</td> </tr> </table>	P/N: XF1006-VO	REV. 00	DWN. 廖玉坤	Dec-19-06	CHK. 李清儿	Dec-19-06	APP. Joe Huff
P/N: XF1006-VO	REV. 00								
DWN. 廖玉坤	Dec-19-06								
CHK. 李清儿	Dec-19-06								
APP. Joe Huff	Dec-19-06								
SHEET 1 OF 1									