

SPECIFICATION FOR COTCO LED LAMP

MODEL No : LO566PPG4-70G-MT
DOC. No : A 01Jul03

Description:


70 Degree 5mm Oval LED Lamp in
Pure Green Color with Tinted Diffused
Lens and Stopper

*This specification is only for Marktech

Dice Material: InGaN

Confirmed
by Customer: _____

Date: _____

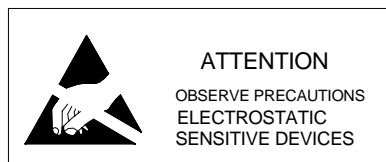

COTCO LUMINANT DEVICE (HUIZHOU) LTD.

Applications:

- Variable Message Signs
- Message Board

Absolute Maximum Ratings at Ta = 25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I_F	25	mA
Peak Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	120	mW
Operation Temperature	T_{opr}	-20 ~ +75	°C
Storage Temperature	T_{stg}	-30 ~ +80	°C
Lead Soldering Temperature	T_{sol}	Max.260°C for 3 sec Max. (3mm from the base of the epoxy bulb)	

*pulse width ≤ 0.1 msec duty $\leq 1/10$

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20$ mA	---	3.6	4.2	V
Reverse Current	I_R	$V_R = 5$ V	---	---	100	μ A
Dominant Wavelength	λ_D	$I_F = 20$ mA	520	525	535	nm
Luminous Intensity	I_V	$I_F = 20$ mA	1100	1700	---	mcd
50% Power Angle	20½H-H	$I_F = 20$ mA	---	65	---	deg
	20½V-V	$I_F = 20$ mA	---	45	---	deg

Ranks Combination ($I_F = 20$ mA)

Rank	T	U	V
Luminous Intensity	1100-1520 mcd	1520-2130 mcd	2130-3000 mcd


Rank	X7	X8	X9
Dominant Wavelength	520-525 nm	525-530 nm	530-535 nm

Rank	V9	V10	V11	V12	V13
Voltage	3.2-3.4 V	3.4-3.6 V	3.6-3.8 V	3.8-4.0 V	4.0-4.2 V

Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be determined by Cotco.
- 2) Tolerance of measurement of luminous intensity is $\pm 15\%$.
- 3) Tolerance of measurement of dominant wavelength is ± 1 nm.
- 4) Tolerance of measurement of Vf is ± 0.05 V.
- 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.

Dimension Drawing

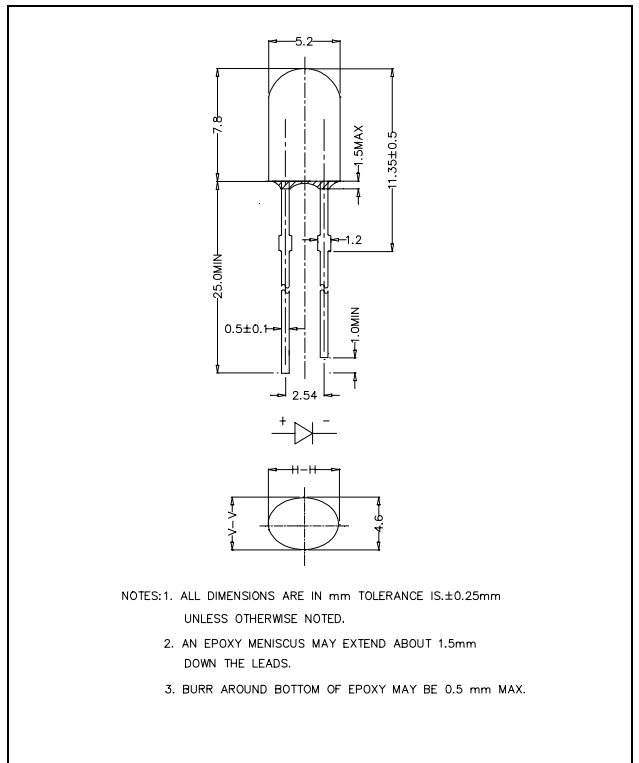

Graphs

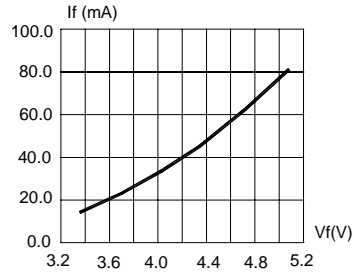


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

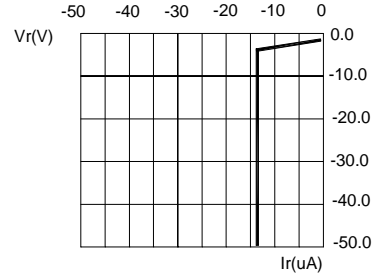


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.




FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

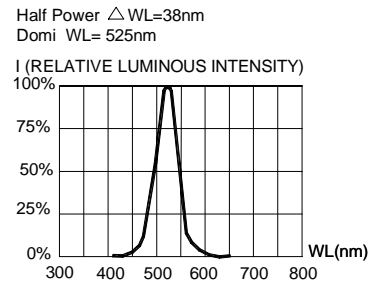


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.




FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ($T_{jmax}=95^{\circ}\text{C}$)

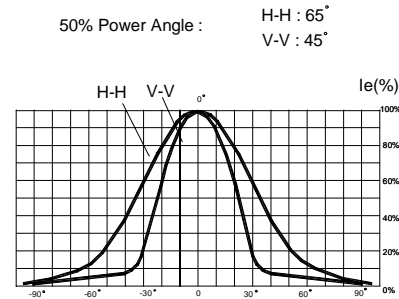


FIG.6 FAR FIELD PATTERN

1. Cathode PAD Area (0.18 X 0.18inch²)
2. Height above nominal seating plane in inches(0.3inch)

Items	Signatures	Date	Revision History	
Prepared by	LiuZM	2003/7/01	DOC. No.	CHANGE DESCRIPTION
Checked by	ZouGR	2003/7/01		
Approved by	David	2003/7/01		
ECN#	ECN-H20030213			

Data is subject to change without prior notice.

Copyright©2002 Cotco International Ltd.

Obsoletes Doc: ---