
KEMET Part Number: R413W36800000M

(413W36800000M)

R41, Film, Metallized Polypropylene, Safety, 0.68 uF, 20%, 1000 VDC, 300 VAC (Y2), 110C, Lead Spacing = 37.5mm

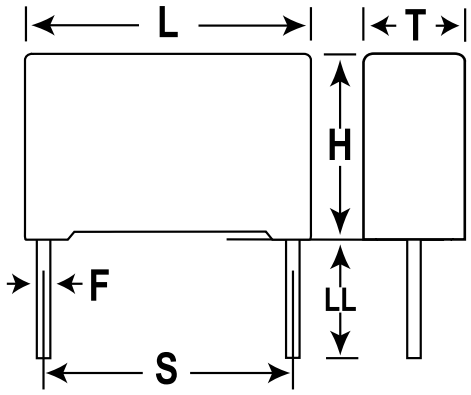

General Information	
Supplier:	KEMET
Series:	R41
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Cut
Approvals:	ENEC, UL, cUL, CQC
AEC-Q200:	No

Dimensions	
L	41.5mm +0.3mm
H	28.5mm +0.1mm
T	16mm +0.3mm
S	37.5mm +/-0.4mm
LL	4mm +2mm
F	1mm +/-0.05mm

Specifications	
Capacitance:	0.68 uF
Capacitance Tolerance:	20%
Voltage DC:	1000 VDC
Voltage AC:	300 VAC (Y2)
Temperature Range:	-40/+110C
Rated Temperature:	110C
Dissipation Factor:	0.3% 1kHz
Insulation Resistance:	44.1176 GOhms
Max dVdt:	300 V
Safety Class:	Y2

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	216

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2017 IntelliData.net