DB LECTRO Inc.

A27 SCSI - III D - SUB IDC (FEMALE)

PITCH: 1.27mm

SPECIFICATIONS


Material


Insulator : PBT, glass reinforced, rated UL 94V-0
Contact : Phosphor Bronze


Electrical

Current Rating : 1 Amp DC
Contact Resistance : 30 mΩ max.
Insulation Resistance : 1000 MΩ min.
Dielectric Withstanding Voltage : 250V AC for 1minute
Operating Temperature : -40℃ to +105℃

- Terminated with 0.635mm pitch flat ribbon cable.
- Mating Suggestion : A26 series.

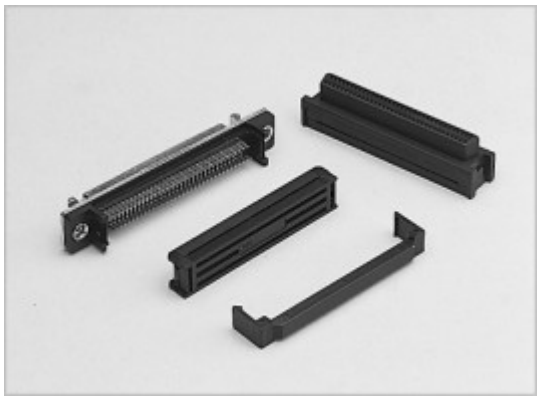

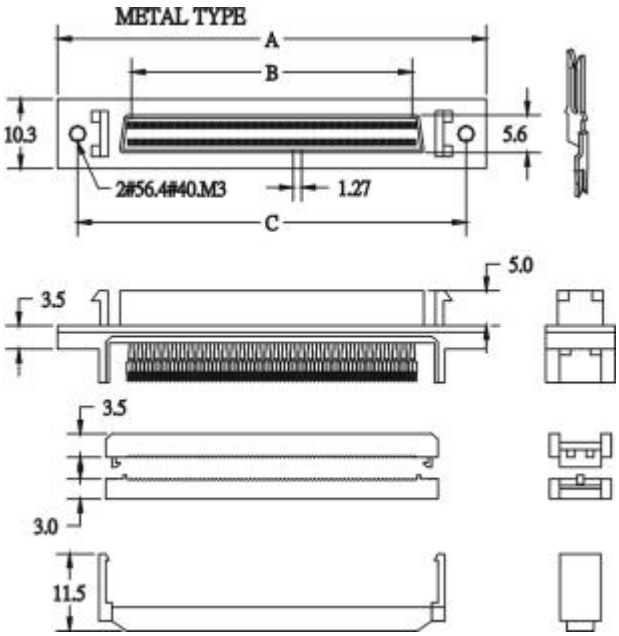

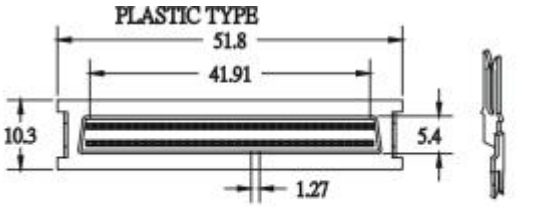

POSITION	A	B	C
50	52.60	30.48	46.50
68	64.03	41.91	57.93

HOW TO ORDER:

A27 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT MATERIAL	4.CONTACT PLATING	5. SHELL
50 68	F: FEMALE	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH O: 3u" INCH GOLD A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: ALL PLASTIC B: METAL

6.MOUNTING METHOD	7.PARTS OPTION	8.ACCESSORIES	9.INSULATOR COLOR
A: THREAD INSERT 2-56 B: THREAD INSERT 4-40 C: THREAD INSERT M3 D: THREAD INSERT M2.6	A: W FRONT LATCH B: W/O FRONT LATCH	A: W STRAIN RELIEF B: W/O STRAIN RELIEF	1. BLACK

DB LECTRO inc. 3600 boul. Matte suite i Brossard Qc J4Y-2Z2 tel:(450)-444-1424 fax:(450)-444-4714