
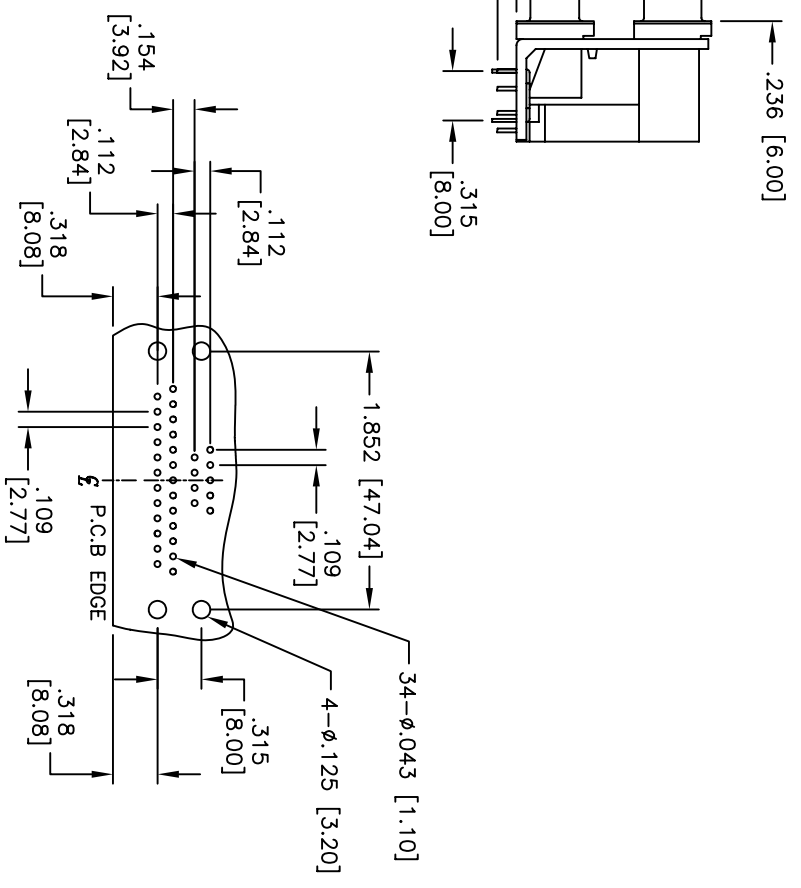
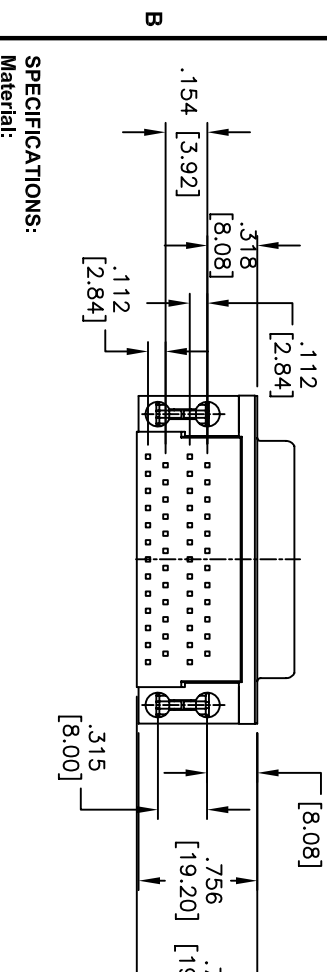


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/19/07	

APPROVED: _____
 DATE: _____ TITLE: _____

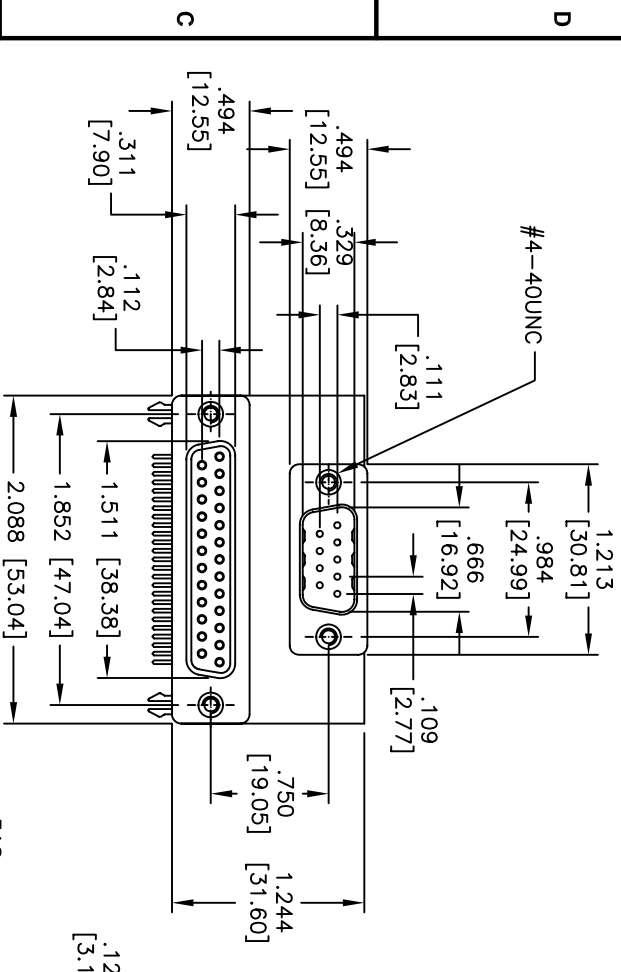

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black
 Contacts: Phosphor Bronze

Plating:
 Gold flash over Nickel underplate overall

Electrical:
 Operating voltage: 250 VAC max

Current rating: 3 Amp max
 Contact resistance: 25 mohms max

Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute

Environmental:

Temperature Rating:
 Operating temperature: -55°C to +105°C

Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

APPROVALS DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB 9 PIN MALE / 25 PIN FEMALE

DRAWN	BW	4/19/07
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	DPD-09P-25S-B2	-
REF:	SCALE: NTS	SHEET 1 OF 1