

# AZ942

## 16 AMP MINIATURE PC BOARD RELAY

### FEATURES

- Extremely low cost
- High switching capacity — 16 Amps
- DC coils to 48 VDC
- UL, CUR file E44211
- Class B insulation for high temperature operation
- Class F insulation available



### CONTACTS

<b>Arrangement</b>	SPST (1 Form A) SPDT (1 Form C)
<b>Ratings</b>	Resistive load
<b>Medium Duty</b>	Max. switched power: 150 W or 2770 VA Max. switched current: 10 A Max. switched voltage: 30 VDC or 300 VAC <b>UL Rating:</b> 5 A at 30 VDC 10 A at 277 VAC 1/3 HP at 125 VAC (1 Form A) 2.9 A 125 VAC Pilot Duty (1 Form A)
<b>Heavy Duty</b>	Max. switched power: 480 W or 4000 VA Max. switched current: 16 A Max. switched voltage: 30 VDC or 300 VAC <b>UL Rating:</b> 12 A at 28 VDC 12 A at 277 VAC 16A at 250 VAC (SPDT) 2.0 A at 240 VAC Pilot Duty
<b>Material</b>	Medium Duty: Silver cerium Heavy Duty: Silver tin oxide
<b>Resistance</b>	<100 milliohms initially (24 V, 1 A voltage drop method)

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	230 mW
<b>Max Continuous Dissipation</b>	Class B: 1.8 W at 20°C (68°F) ambient Class F: 2.4 W at 20°C (68°F) ambient
<b>Temperature Rise</b>	23°C (42°F) at nominal coil voltage
<b>Temperature</b>	Class B: Max. 130°C (266°F) Class F: Max. 155°C (311°F)

### GENERAL DATA

<b>Life Expectancy</b>	Minimum operations
<b>Mechanical</b>	1x10 <sup>7</sup>
<b>Electrical</b>	1 x 10 <sup>5</sup> at 10 A 277 VAC Res.
<b>Operate Time (typical)</b>	10 ms at nominal coil voltage
<b>Release Time (typical)</b>	5 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	1750 Vrms contact to coil 1000 Vrms across contacts
<b>Insulation Resistance</b>	100 megohms min. at 20°C, 500 VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature</b>	At nominal coil voltage
<b>Operating</b>	Class B: -40°C(-40°F) to 100°C(212°F) Class F: -40°C(-40°F) to 120°C(248°F)
<b>Storage</b>	Class B: -55°C(-67°F) to 130°C(266°F) Class F: -55°C(-67°F) to 155°C(311°F)
<b>Vibration</b>	0.062" DA at 10–55Hz
<b>Shock</b>	10 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	13 g

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Unsealed relays should not be dip cleaned.
4. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

5/17/05W

# AZ942

## RELAY ORDERING DATA

STANDARD RELAYS: Medium Duty Type (10 Amp Contact)				ORDER NUMBER*	
COIL SPECIFICATIONS				Unsealed	Sealed
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$		
3	2.4	6.7	25	AZ942-1CH-3D	AZ942-1CH-3DE
5	4.0	11.2	70	AZ942-1CH-5D	AZ942-1CH-5DE
6	4.8	13.4	100	AZ942-1CH-6D	AZ942-1CH-6DE
9	7.2	20.1	225	AZ942-1CH-9D	AZ942-1CH-9DE
12	9.6	26.8	400	AZ942-1CH-12D	AZ942-1CH-12DE
18	14.4	40.2	900	AZ942-1CH-18D	AZ942-1CH-18DE
24	19.2	53.6	1,600	AZ942-1CH-24D	AZ942-1CH-24DE
48	38.4	107.3	6,400	AZ942-1CH-48D	AZ942-1CH-48DE


\*Substitute "1AT" in place of "1CH" to indicate 1 Form A contact. To indicate Class F version, add suffix "F."

## RELAY ORDERING DATA

STANDARD RELAYS: Heavy Duty Type (16 Amp Contact)				ORDER NUMBER*	
COIL SPECIFICATIONS				Unsealed	Sealed
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$		
3	2.4	6.7	25	AZ942-1CT-3D	AZ942-1CT-3DE
5	4.0	11.2	70	AZ942-1CT-5D	AZ942-1CT-5DE
6	4.8	13.4	100	AZ942-1CT-6D	AZ942-1CT-6DE
9	7.2	20.1	225	AZ942-1CT-9D	AZ942-1CT-9DE
12	9.6	26.8	400	AZ942-1CT-12D	AZ942-1CT-12DE
18	14.4	40.2	900	AZ942-1CT-18D	AZ942-1CT-18DE
24	19.2	53.6	1,600	AZ942-1CT-24D	AZ942-1CT-24DE
48	38.4	107.3	6,400	AZ942-1CT-48D	AZ942-1CT-48DE

\*Substitute "1AW" in place of "1CT" to indicate 1 Form A contact. To indicate Class F version, add suffix "F."

## MECHANICAL DATA

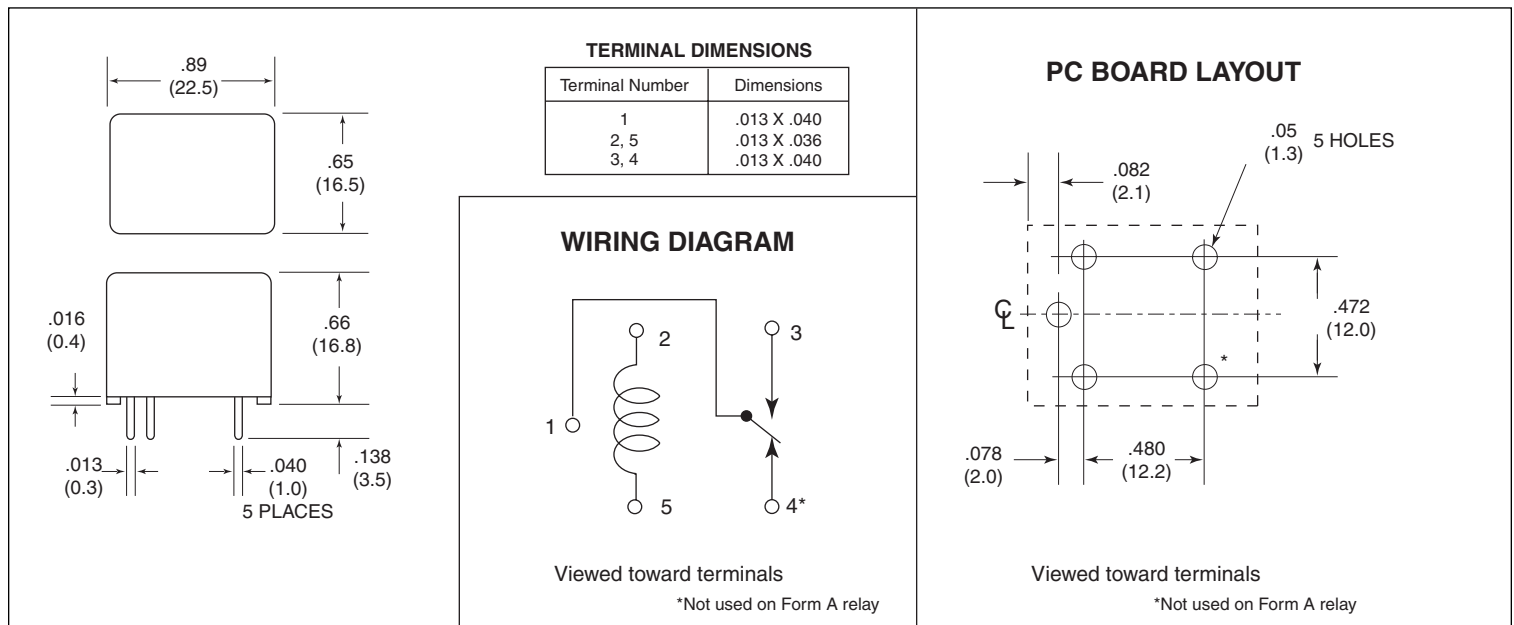

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm 0.010$ "



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

5/17/05W