


RECOMMENDED P.C.B. LAYOUT

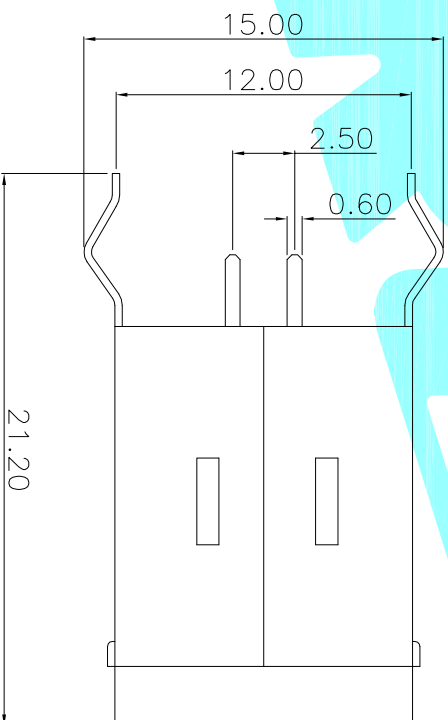

### Specification

1. Voltage Current Rating: 1AMP, 30V AC
2. Insulation Resistance: 1000M $\Omega$  Min
3. Contact Resistance: 30m $\Omega$  Max
4. Dielectric Withstanding Voltage: 500V AC
5. Temperature Range: -20°C to +60°C

### NOTE:

Tolerances unless otherwise specified:  
 0-10:±0.15; 10-20:±0.20; 20-30:±0.25

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
③	Base	—	1	PA9T	White/black
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	BRASS	Ni Plated

APPROVALS	DATE	TITLE:
DRAWN JIANKUN LU	2018.08.01	USB CONNECTOR
CHECKED		
APPROVALS		

APPROVALS	PART NO.	SCALE:	PROJ:
TOLERANCES ARE	U-B-M4DD-W-2	1:1	①
30~Ø以上			
10~30			
5~10			
~5			
±0.30			
±0.25			
±0.20			
±0.15			
ANGLE			
±2'			
UNIT: mm			
DRAWING NO.			
SHEET	1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO., LTD