
**Extract from the online catalog**

# PCV 35 HC/ 4-GF-15,00

Order No.: 1762819

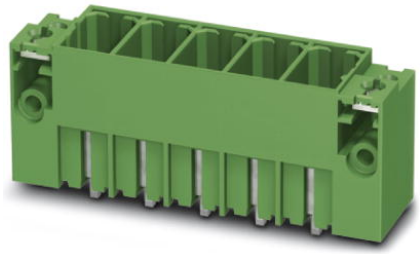

http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1762819

Header, Nominal current: 125 A, Nom. voltage: 1000 V, Pitch: 15 mm, Number of positions: 4, Color: green, Assembly: Soldering

| Commercial data | |
|---|---|
| EAN | 4046356444071 |
| Pack | 25 pcs. |
| Customs tariff | 85366990 |
| Weight/Piece | 0.085552 KG |
| Catalog page information | Page 443 (CC-2009) |

Product notes

WEEE/RoHS-compliant since: 08/19/2008

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Dimensions / positions


| | |
|---|---|
| Pitch | 15 mm |
| Dimension a | 45 mm |
| Number of positions | 4 |
| Pin spacing | 15 mm |

**Technical data**


| | |
|---|---|
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 8 kV |
| Rated surge voltage (III/2) | 8 kV |
| Rated surge voltage (II/2) | 8 kV |
| Rated voltage (III/2) | 1000 V |
| Rated voltage (II/2) | 1000 V |
| Nominal current $I_N$ | 125 A |
| Nominal voltage $U_N$ | 1000 V |
| Maximum load current | 125 A |
| Insulating material | PBT |
| Inflammability class acc. to UL 94 | V0 |

## Diagrams/Drawings

Drilling plan/solder pad geometry

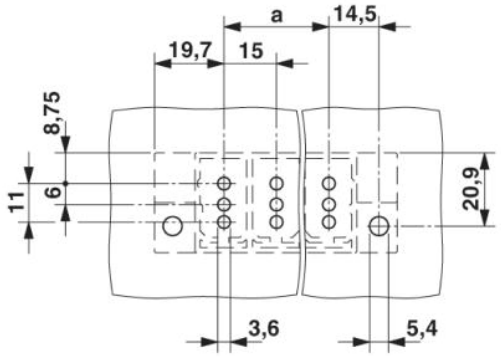


Dimensioned drawing

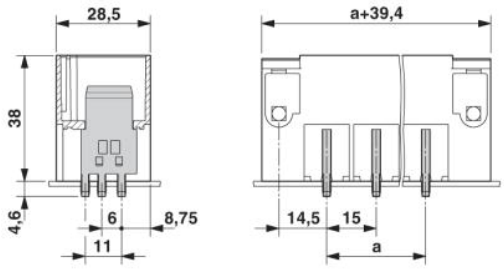

## Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057,USA
Phone (800) 888-7388
Fax (717) 944-1625
http://www.phoenixcon.com

© 2010 Phoenix Contact
Technical modifications reserved;