Single Phase Half Controlled Bridges


PSBH 55

I_{TAVM} = 46A
V_{RRM} = 400-1600 V

Preliminary Data Sheet

V_{RSM} V_{DSM}	V_{RRM} V_{DRM}	Type
500	400	PSBH 55/04
900	800	PSBH 55/08
1300	1200	PSBH 55/12
1500	1400	PSBH 55/14
*1700	*1600	PSBH 55/16

* Delivery on request

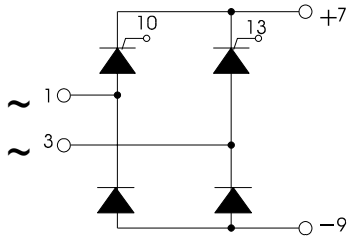




Symbol	Test Conditions			Maximum Ratings	
I_{TAVM}, I_{FAVM}	T_C = 85 °C	per module		46	A
I_{TSM}, I_{FSM}	T_{VJ} = 45°C	t = 10 ms	(50 Hz), sine	520	A
	V_R = 0	t = 8.3 ms	(60 Hz), sine	560	A
	T_{VJ} = T_{VJM}	t = 10 ms	(50 Hz), sine	460	A
	V_R = 0	t = 8.3 ms	(60 Hz), sine	500	A
$\int i^2 dt$	T_{VJ} = 45°C	t = 10 ms	(50 Hz), sine	1350	A^2 s
	V_R = 0	t = 8.3 ms	(60 Hz), sine	1300	A^2 s
	T_{VJ} = T_{VJM}	t = 10 ms	(50 Hz), sine	1050	A^2 s
	V_R = 0	t = 8.3 ms	(60 Hz), sine	1030	A^2 s
$(di/dt)_{cr}$	T_{VJ} = T_{JVM}	repetitive, I_T = 150 A		100	A/µs
	f = 50Hz, t_P = 200µs				
	V_D = 2/3 V_{DRM}				
	I_G = 0.3 A	non repetitive, I_T = I_{TAVM}		500	A/µs
	di_G/dt = 0.3 A/µs				
$(dv/dt)_{cr}$	T_{VJ} = T_{VJM}	V_{DR} = 2/3 V_{DRM}		1000	V/µs
	R_{GK} = ∞, method 1 (linear voltage rise)				
P_{GM}	T_{VJ} = T_{VJM}	t_P = 30µs		10	W
	I_T = I_{TAVM}	t_P = 300µs		5	W
P_{GAVM}				0.5	W
V_{RGM}				10	V
T_{VJ}				-40 ... + 125	°C
T_{VJM}				125	°C
T_{stg}				-40 ... + 125	°C
V_{ISOL}	50/60 HZ, RMS	t = 1 min		2500	V ~
	I_{ISOL} ≤ 1 mA	t = 1 s		3000	V ~
M_d	Mounting torque		(M5)	5	Nm
	Terminal connection torque		(M3)	1.5	Nm
			(M5)	5	Nm
Weight	typ.			220	g


Features
- Package with screw terminals
- Isolation voltage 3000 V~
- Planar glasspassivated chips
- Low forward voltage drop
- UL registered E 148688

Applications
- Heat and temperature control for industrial furnaces and chemical processes
- Lighting control
- Motor control
- Power converter

Advantages
- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density

Package, style and outline
Dimensions in mm (1mm = 0.0394“)

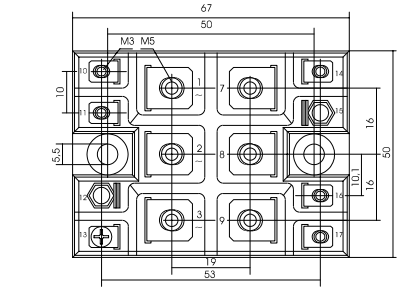

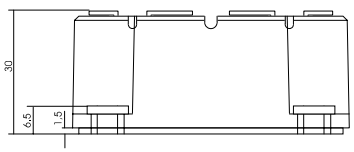

POWERSEM GmbH, Walpersdorfer Str. 53
91126 D- Schwabach
Phone: 09122 - 9764-0 Fax.: 09122 - 9764-20

© 2005 POWERSEM reserves the right to change limits, test conditions and dimensions

Symbol	Test Conditions		Characteristic Value		
I_D, I_R	$T_{VJ} = T_{VJM}$, $V_R = V_{RRM}$, $V_D = V_{DRM}$		≤	5	mA
V_T	I_T = 150A, T_{VJ} = 25°C		≤	1.65	V
V_{TO}	For power-loss calculations only ($T_{VJ} = T_{VJM}$)			0.85	V
r_T				11	mΩ
V_{GT}	V_D = 6V	T_{VJ} = 25°C	≤	1.0	V
		T_{VJ} = -40°C	≤	1.6	V
I_{GT}	V_D = 6V	T_{VJ} = 25°C	≤	100	mA
		T_{VJ} = -40°C	≤	150	mA
V_{GD}	$T_{VJ} = T_{VJM}$	V_D = 2/3 V_{DRM}	≤	0.2	V
I_{GD}	$T_{VJ} = T_{VJM}$	V_D = 2/3 V_{DRM}	≤	5	mA
I_L	T_{VJ} = 25°C, t_P = 10µs		≤	200	mA
	I_G = 0.3A, di_G/dt = 0.3A/µs				
I_H	T_{VJ} = 25°C, V_D = 6V, R_{GK} = ∞		≤	150	mA
t_{gd}	T_{VJ} = 25°C, V_D = ½ V_{DRM}		≤	2	µs
	I_G = 0.3A, di_G/dt = 0.3A/µs				
t_q	$T_{VJ} = T_{VJM}$, I_T = 20A, t_P = 200µs, V_R = 100V			150	µs
	-di/dt = 10A/µs, dv/dt = 15V/µs, V_D = 2/3 V_{DRM}				
R_{thJC}	per thyristor; sine 180°el			1.2	K/W
	per module			0.3	K/W
R_{thJK}	per thyristor; sine 180° el			1.31	K/W
	per module			0.327	K/W
d_S	Creeping distance on surface			8.0	mm
d_A	Creeping distance in air			4.5	mm
a	Max. allowable acceleration			50	m/s^2

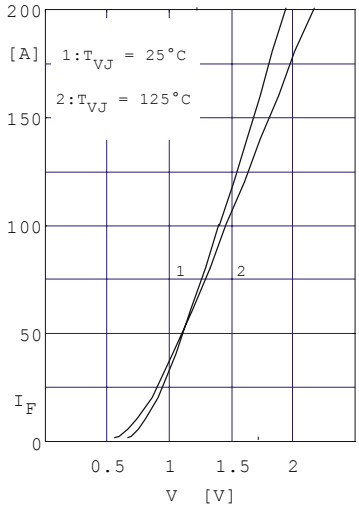


Fig. 1 Forward current vs. voltage drop per diode or thyristor

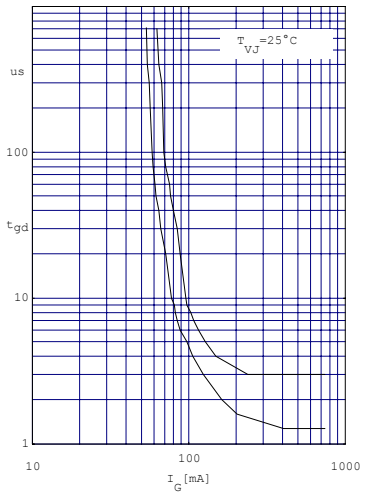


Fig. 2 Gate trigger delay time

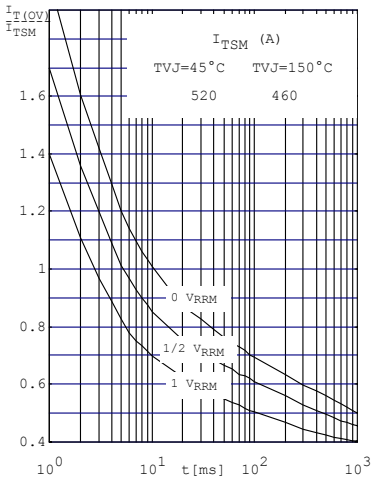


Fig. 3 Surge overload current per diode (or thyristor) I_{FSM}, I_{TSM}: Crest value t: duration

POWERSEM GmbH, Walpersdorfer Str. 53
91126 D- Schwabach
Phone: 09122 - 9764-0 Fax.: 09122 - 9764-20

© 2005 POWERSEM reserves the right to change limits, test conditions and dimensions

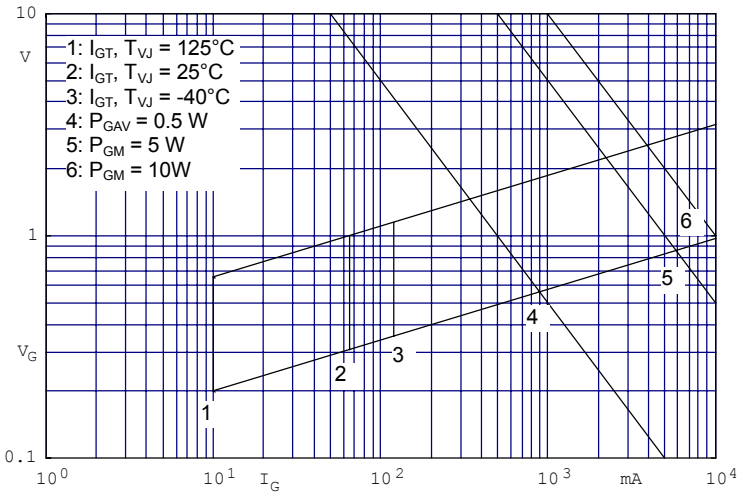


Fig.4 Gate trigger characteristic

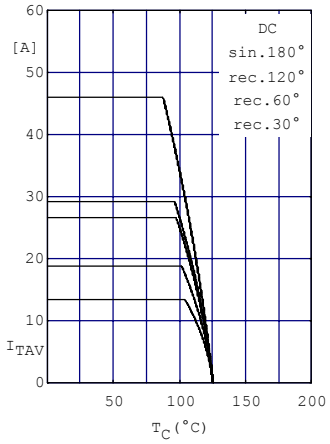


Fig.5 Maximum forward current at case temperature

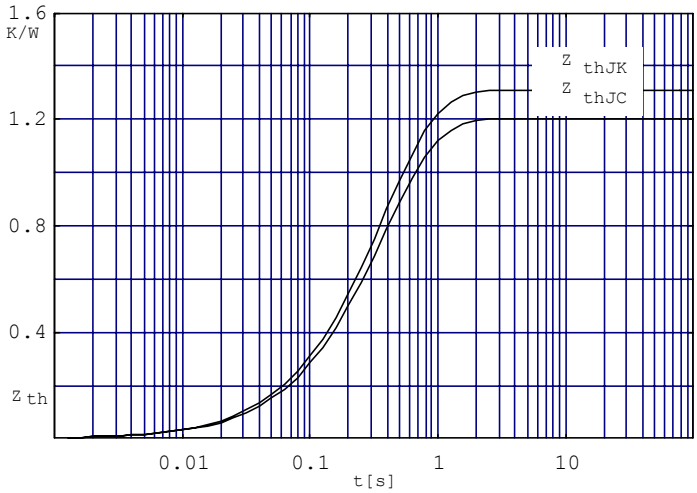


Fig.6 Transient thermal impedance per thyristor or diode (calculated)

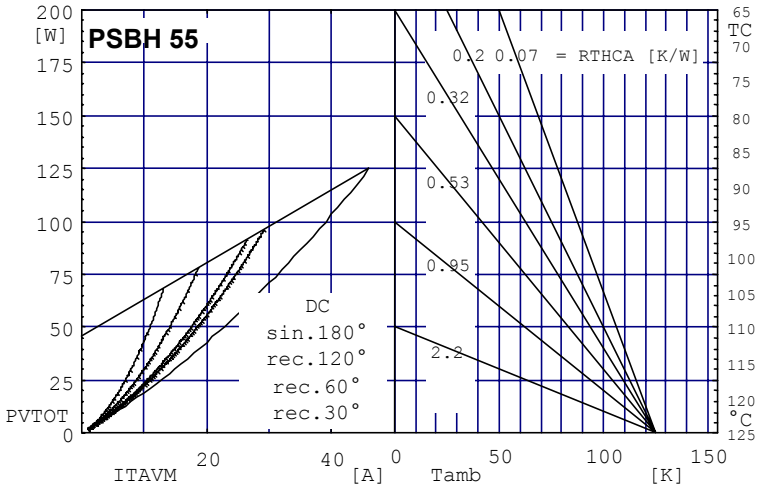


Fig. 7 Power dissipation vs. direct output current and ambient temperature

POWERSEM GmbH, Walpersdorfer Str. 53
91126 D- Schwabach
Phone: 09122 - 9764-0 Fax.: 09122 - 9764-20

© 2005 POWERSEM reserves the right to change limits, test conditions and dimensions