


SERIES 76

SPST Rocker


FEATURES

- Raised and Recessed, Rocker and PIANO-DIP® Styles
- Sealed Base Standard
- Spring and Ball Contact
- Top Tape Seal Option

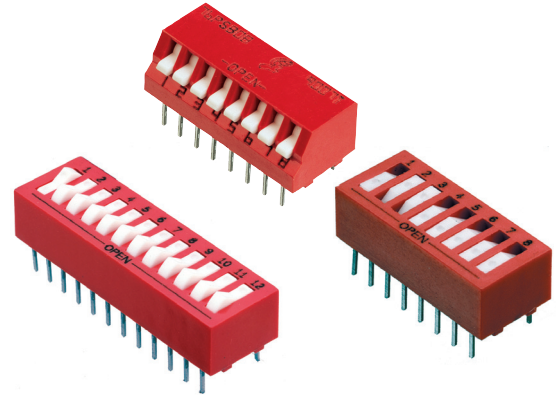


DIMENSIONS In inches (and millimeters)


Rocker and Recessed Rocker

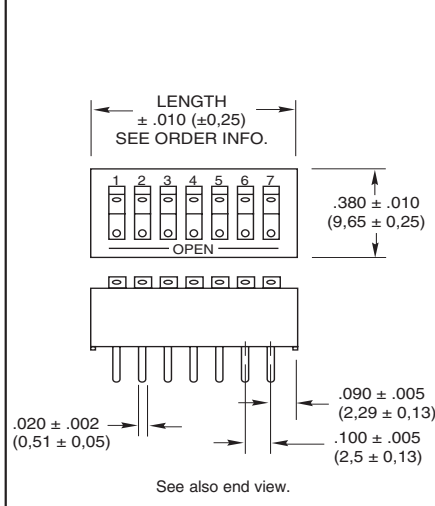

Side Actuated PIANO-DIP®

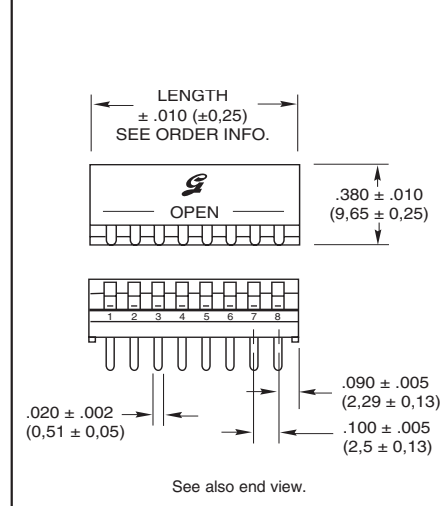


PIANO-DIP®

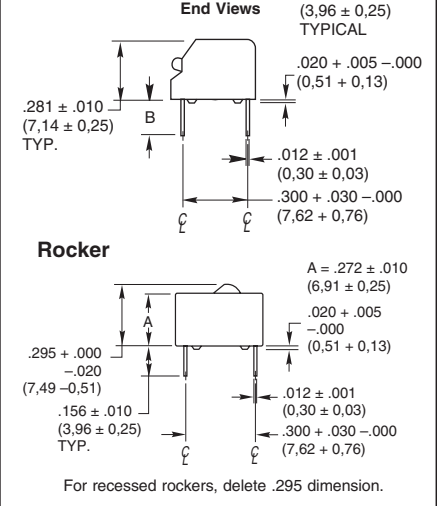


CIRCUITRY

Styles 76SB and 76RSB




Style 76PSB

UP IS OPEN (OFF)



Styles 76PRB

UP IS CLOSED (ON)



ORDERING INFORMATION

Series		No. of Pos.	Length (Inches)	Length (Metric)	No./Tube
Switch Style: SB = Raised Rocker		2	0.280"	7,1 mm	35
RSB = Recessed Rocker		3	0.380"	9,7 mm	27
PSB = Piano-DIP (Up is Off)		4	0.480"	12,2 mm	21
PRB = Piano-DIP (Up is On)		5	0.580"	14,7 mm	18
		6	0.680"	17,3 mm	15
		7	0.780"	19,8 mm	13
		8	0.880"	22,4 mm	12
		9	0.980"	24,9 mm	10
		10	1.080"	27,4 mm	9
		12	1.280"	32,5 mm	8

76RSB04ST

T = RoHS compliant
Sealed*: S = Tape Seal
Number of Positions: 02 through 10, 12

*A top tape seal is required for switches that are machine soldered or heavily cleaned after hand soldering. To order top seal versions, add "S" to the Grayhill part number.

Available from your local Grayhill Distributor.
 For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.