

ADQ500 Series

500 Watt Quarter Brick DC-DC Converter

Data Sheet

Total Power: 500 Watt (target)
(12 V @ 42 A)
Input Voltage: 36 - 75 V
of Outputs: Single (12 V Nom)

SPECIAL FEATURES

- 500 W continuous power
- Ultra high efficiency: 95.5% typical at half load
- 36-75 Vdc Telecomm input range
- Baseplate optimized for contact cooling or heatsink mounting
- Trim -20% to +10% Vout
- Open frame version optimised for air cooling
- Low ripple and noise
- Fixed switching frequency
- High capacitive load capability
- Pre-bias start-up capability
- High reliability
- RoHS 6 compliant
- UL94 V-0 materials
- DOSA footprint compliant
- PMBus Rev. 1.2 compliant
- Two year warranty (consult factory for extended terms)

SAFETY

- EN60950
- CSA
- CE
- UL




Electrical Specifications

Input	
Input voltage	36 - 75 Vdc
Input surge	100 V / 100 mSec
Input UVLO	Turn-on: 35 Vdc Turn-off: 33 Vdc Hysteresis: 2 Vdc
I/O insulation	Basic insulation
I/O isolation	1500 Vdc
Efficiency (48 Vin, 25 °C ambient)	94.5% @ 100% load (95.5% @ 50% load)
Output	
Output voltage	12 V nominal set point
Output voltage regulation	Line regulation: 20 mV typical Load regulation: 20 mV typical Temperature regulation: 0.002% / °C typical
Output current maximum	42 A
Noise/ripple	200 mVpp
Overtemperature protection	120 °C hot spot
Overvoltage protection Method / OVP operation	13.8 - 16 V window Auto restart / 130% Vout
Overcurrent protection voltage Method / OCP operation	46.5 A - 59 A window Hiccup at 140% Iout
Output voltage control	-20% to +10% Vout Trim
Control	
Enable	TTL compatible (negative logic)
Switching frequency	175 KHz
Pre-bias start-up	0% to 95% Vout


Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +105 °C
Baseplate operating temperature	-40 °C to +100 °C (no power derating)
MTBF	1 Million hours (target)

Mechanical Drawing - Open Module

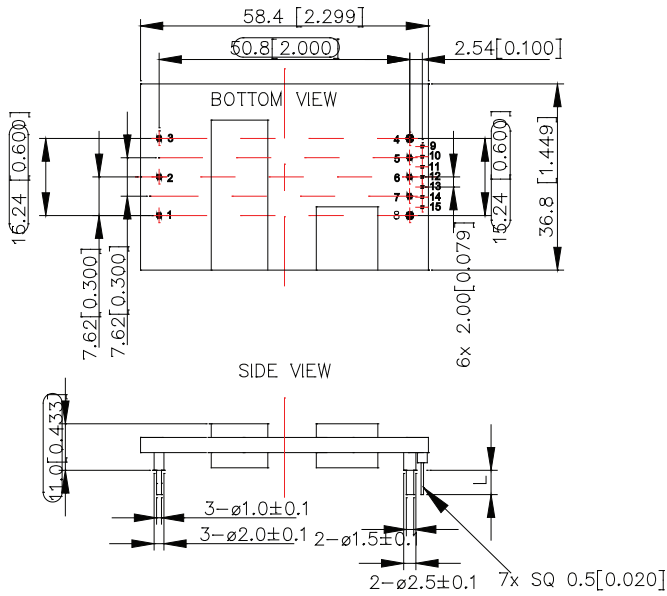

Mechanical Drawing - Baseplate Module

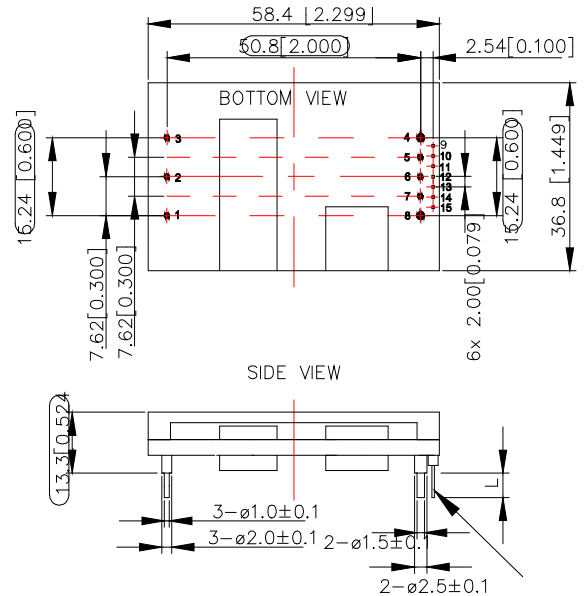

UNIT: mm [inch] BOTTOM VIEW: pin on upside L = 3.80 mm

TOLERANCE: X.X mm \pm 0.5 mm [X.X inch \pm 0.02 inch]
 x.xx mm \pm 0.25 mm [X.X inch \pm 0.01 inch]

Ordering Information

Model number	Input voltage	Output voltage set point	Output current	Efficiency
ADQ500-48S12-6L	36 - 75 Vdc	12 Vdc	42 A	94.5% (full load)
ADQ500-48S12B-6L	36 - 75 Vdc	12 Vdc	42 A	94.5% (full load)
ADQ500-48S12-6LI	36 - 75 Vdc	12 Vdc	42 A	94.5% (full load)
ADQ500-48S12B-6LI	36 - 75 Vdc	12 Vdc	42 A	94.5% (full load)

"B" = Baseplate

"I" = PMBus interface version

Pin Assignments

Pin #	Name	Function	Optional
1	+Vin	Positive input voltage	
2	Remote On/Off	Remote control	
3	-Vin	Negative input voltage	
4	-Vo	Negative output voltage	
5	-Sense	Remote sense negative	Yes
6	Trim	Voltage adjustment	Yes
7	+Sense	Remote sense positive	Yes
8	+Vo	Positive output voltage	
9	C2	Digital	Yes
10	Sig_Gnd	Digital	Yes
11	Data	Digital	Yes
12	SMBAlert	Digital	Yes
13	Clock	Digital	Yes
14	Addr1	Digital	Yes
15	Addr0	Digital	Yes

Device code suffix	L
-4	4.8 mm ± 0.5 mm
-6	3.8 mm ± 0.5 mm
-8	2.8 mm ± 0.25 mm
None	5.8 mm ± 0.5 mm

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
EMBEDDED TECHNOLOGIES

www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com