

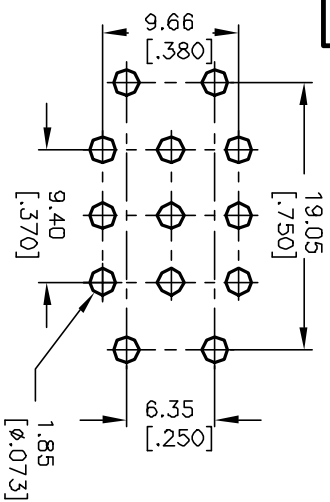



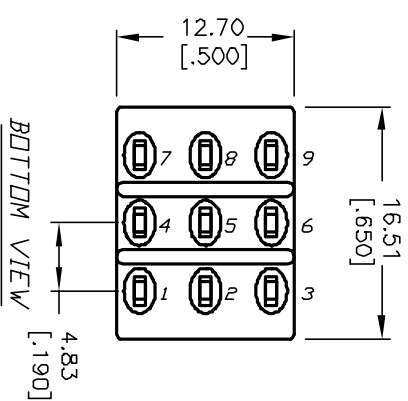

RECOMMENDED PANEL MOUNTING

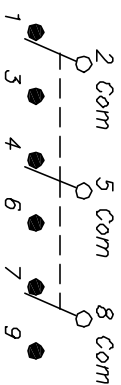


CIRCUIT: 3PDT

SWITCH FUNCTION		
<i>POS. 1</i>	<i>POS. 2</i>	<i>POS. 3</i>
<i>DN</i>	<i>NONE</i>	<i>DN</i>
<i>2-3,5-6,8-9</i>	<i>OPEN</i>	<i>2-1,5-4,8-7</i>

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
X.X.X=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERM/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE.
6. ELECTRICAL LIFE:
50,000 make-and-break cycles at full load
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
9. OPERATION TEMP.: -30°C to +85°C
10. ▲ DENOTES CRITICAL PARAMETER.

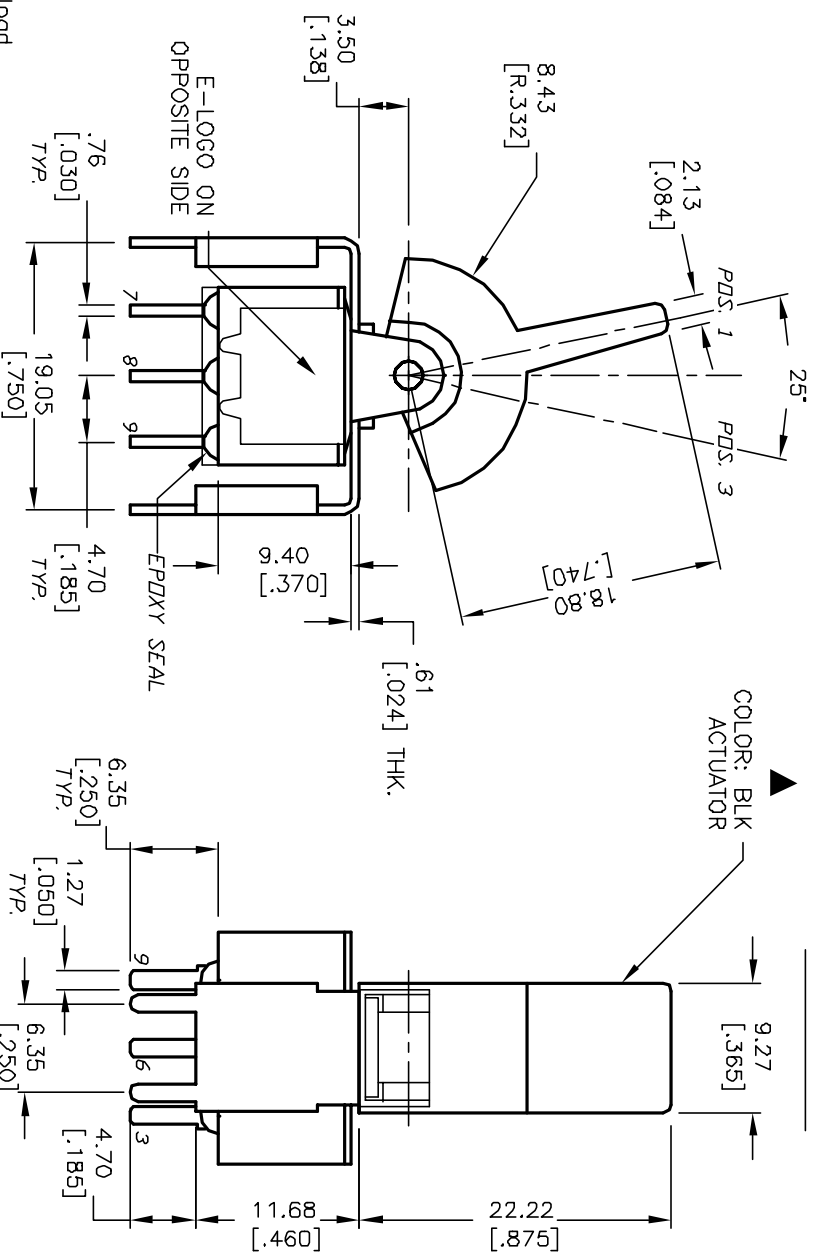

COLOR: BLK
ACTUATOR

BOTTOM VIEW

9. OPERATION TEMP.: -30°C to +85°C			
10. ▲ DENOTES CRITICAL PARAMETER.			
A	12954	RELEASED FOR PRODUCTION	3/25/03 AR
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TITLE			
3003P2J2BLKM2QE			
SCALE	DATE	DR	DWG
2:1	3/25/03	AR	T333005
		REV	
		A	