
4,45” x 4,45” x 3,48” 113 x 113 x 88,5 mm

Series 80T

ETRI®

400 Hz Fans



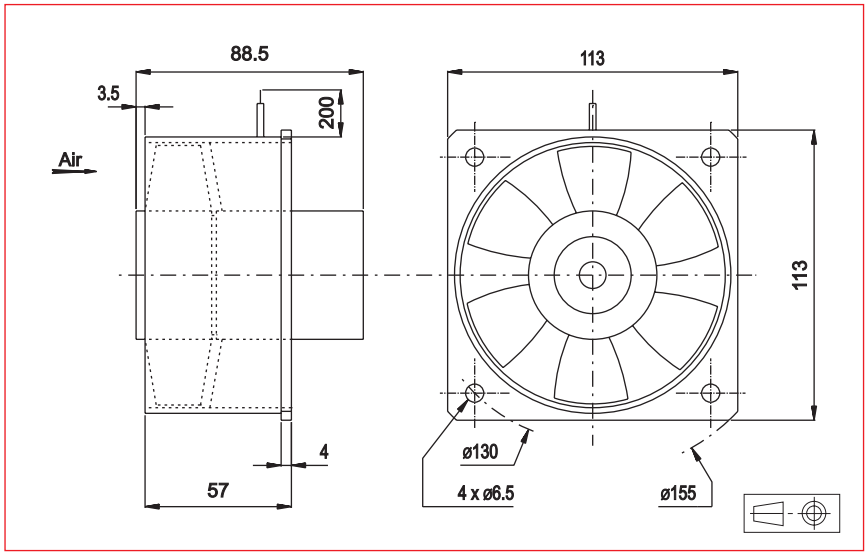

Approvals


400 Hz Motor
Housing material: aluminium
Impeller material: aluminium
Weight: 940 g
Bearing system: ball bearings


Connection: flying leads

Available with:
- Round Housing

Life expectancy

L-10 LIFE AT 40°C:
25 000 hours

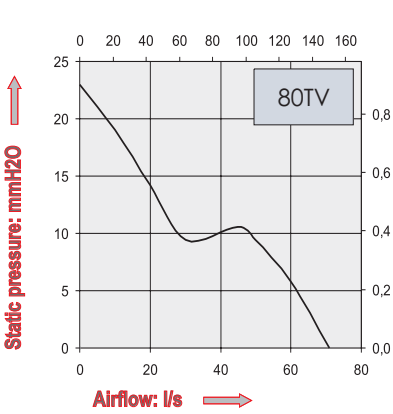

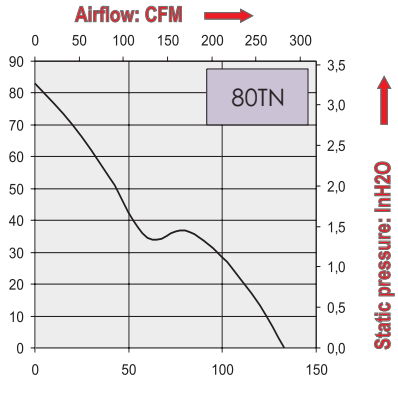

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor (not included)	Input power	Nominal Current	Starting Current	Operating temperature	
	V	l/s	dB(A)	RPM		µF	W	mA	mA	Min.°C	Max.°C
80TV0562C13	115	71	61	5200	3		52	435	645	-10	70
	115	71	61	5200	1	1,47	47	445	540	-10	70
80TV0560C13	200	71	61	5200	3		52	250	370	-10	70
	200	71	61	5200	1	0,47	47	255	310	-10	70
80TN0562C13	115	135	76	9700	3		153	1150	2800	-10	70
	115	135	76	9700	1	4,7	147	1400	2350	-10	70
80TN0560C13	200	135	76	9700	3		153	650	1600	-10	70
	200	135	76	9700	1	1,47	147	785	1350	-10	70

Additional versions:
Salt spray protected - Shock and vibration protected - Marine specifications
Wide temperature range

Accessories:
Refer to Accessories leaflet

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition 2008