


VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

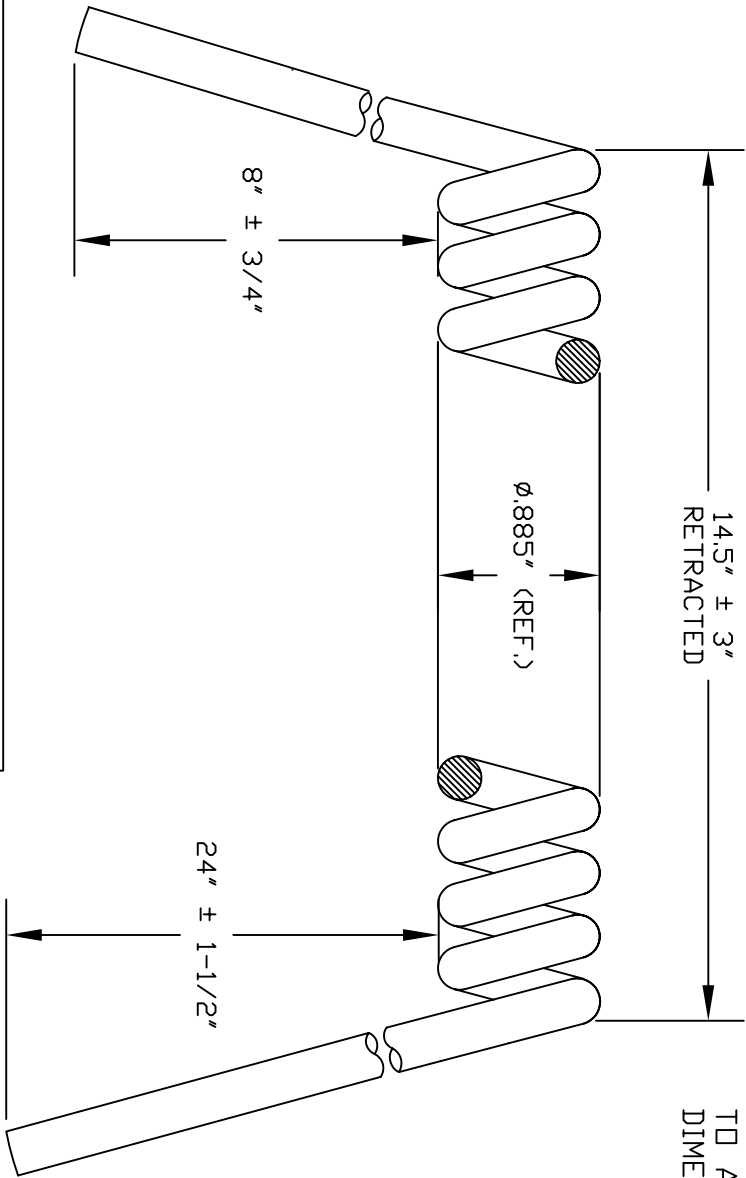

**NOTES**

- 1) CORDAGE: 26AWG, 7 CONDUCTOR, PVC, FOIL WRAP/SPIRAL SHIELD, 80°C, BLACK
- 2) COPPER CONDUCTOR TO BE MADE UP OF 19 STRANDS OF 38AWG TINNED COPPER.
- 3) JACKETED SINGLES WILL BE BLACK, WHITE, RED, GREEN, BROWN, BLUE, AND ORANGE IN COLOR.
- 4) CORDAGE D.D.: .250" NDM.
- 5) APPROVALS: UL AWM 2464
- 6) RATING: 300 VOLTS
- 7) CARTON QTY TBD.
- 8) ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

**CUD**

FORM IN71-07 REV.A

Indianapolis, IN  
 Conover, N.C.  
 Freemont, CA  
 Aguascalientes, MX  
 Tijuana, Mexico  
 Hermosillo, MX  
 Clinton, AR  
 Kanata, Canada

**Proprietary Notice:**  
 This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

ROHS COMPLIANT  
 FINISH: JACKET: SMOOTH

SCALE:	ECD:	ITEM DESCRIPTION	DATE
NDT TO SCALE	N/A	PRELIMINARY RELEASE	12/19/08
DESCRIPTION			
RETRACTILE CORD - NORTH AMERICAN			
APPROVED	DRAWN BY	DATE:	
MAF	MAF	12/19/08	
PART NO.	6665		

TOLERANCE UNLESS OTHERWISE SPECIFIED  
 .XXX ± .005  
 .XX ± .02  
 .X ± .03  
 FRACT. ± 1/32°  
 ANGULAR ± 1/2°

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Volex:](#)

[6665 10 1](#)